


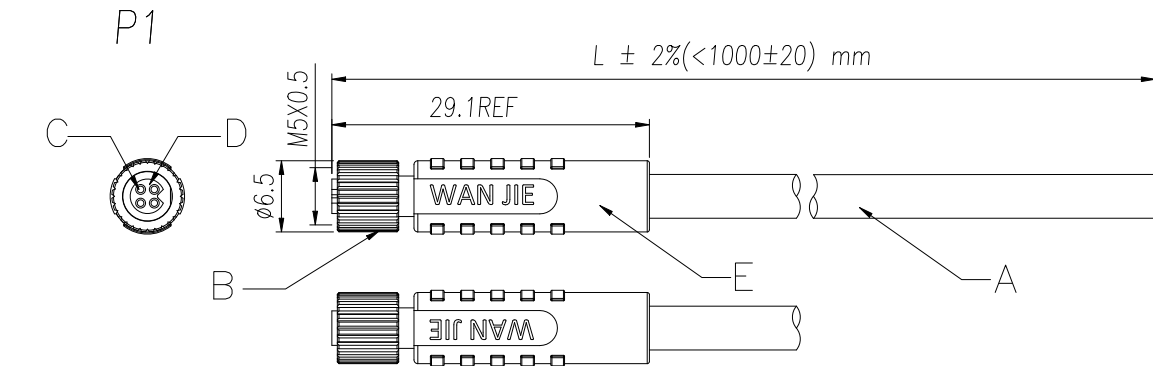

Pin Number:03,04
Cable Length L:
050=0.5m;100=1.0m; 10M=10m;


Contacts Pin 数	3Pin	4Pin
Coding 编码	 A-Coding	 A-Coding
Rated Current 额定电流	1A	1A
Rated Voltage 额定电压	60V	60V
Wire Range 线范围	26AWG	26AWG
PART NO. 品名 (0.15m)	M05-A03-ST0-F02-BCC-015	M05-A04-ST0-F02-BCC-015
PART NO. 品名 (1.0m)	M05-A03-ST0-F02-BCC-100	M05-A04-ST0-F02-BCC-100
PART NO. 品名 (2.0m)	M05-A03-ST0-F02-BCC-200	M05-A04-ST0-F02-BCC-200
PART NO. 品名 (3.0m)	M05-A03-ST0-F02-BCC-300	M05-A04-ST0-F02-BCC-300
PART NO. 品名 (5.0m)	M05-A03-ST0-F02-BCC-500	M05-A04-ST0-F02-BCC-500
Custiomized. 定制化:	M05-A03-ST0-F02-BCC-XXX	M05-A04-ST0-F02-BCC-XXX

3Pin
P1 Wirelist
1 brown
3 blue
4 black

4Pin
P1 Wirelist
1 brown
2 White
3 blue
4 black

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	--	—		2021.08.25
		IEC 技术参数 IEC Technical Data IEC61076-2-105		
工作温度		Operating temperatur [°C]	-25~-80	
防护等级		IP Class (IN Locked condition)	IP67	
额定电压		Rated Voltage [V]	60	
额定电流		Rated Current [A]	1	
导线截面积		Conductor cross section	0.14	
硬质/柔性导线		Solid/ flexible [mm²]		
接线范围		Wire Range	26	
单/多芯线		Solid/Stranded [AWG]		
材料 Material				
绝缘材料		Insulation Material	PA 66	
阻燃等级		Imflammability	UL94V-0	
导体材料		Contactoer Material	铜合金 Copper alloy	
导体镀层		Contactive Coating	镀金 Gold Plated	
螺母/螺丝		Connector Nut/Screw	Brass With Nickel Plated铜镀镍	
符合RoHS环保要求				

E		PUR	Molded With Black PUR	G	5
D		Housing	A-Coding Female,Black PA66	pcs	1
C		Terminal	Female Terminal ,Brass With Gold Plated	pcs	X
B		Screw	Screw M5X0.5,Brass With Nickel Plated	pcs	1
A		Cable	UL2464 26AWG Black PVC Jacket	mm	XXX
编号 No.	料号 Materials.No	品名 Name	材料规格 Description	单位 Unit	用量 Qty

		慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD				PART NO.: M05-AXX-ST0-F02-BCC-XXX	
NO SPECIFIED TOLERANCE		Cus' P/N:		Order No: ---		Drawing No.:	SP-02-M000XX
LINEAR	0.5~6	±0.1	DES.	JUN	DATE	UNITS	mm
	6~30	±0.2	CHK.		DATE	SIZE	A4
ANGLES	>30	±2%	APP.		DATE	SCALE	X:X
	±1°					文件等级: 外部公开	
						THIRD ANGLE PROJECTION	PAGE
							1 of 1