




慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE

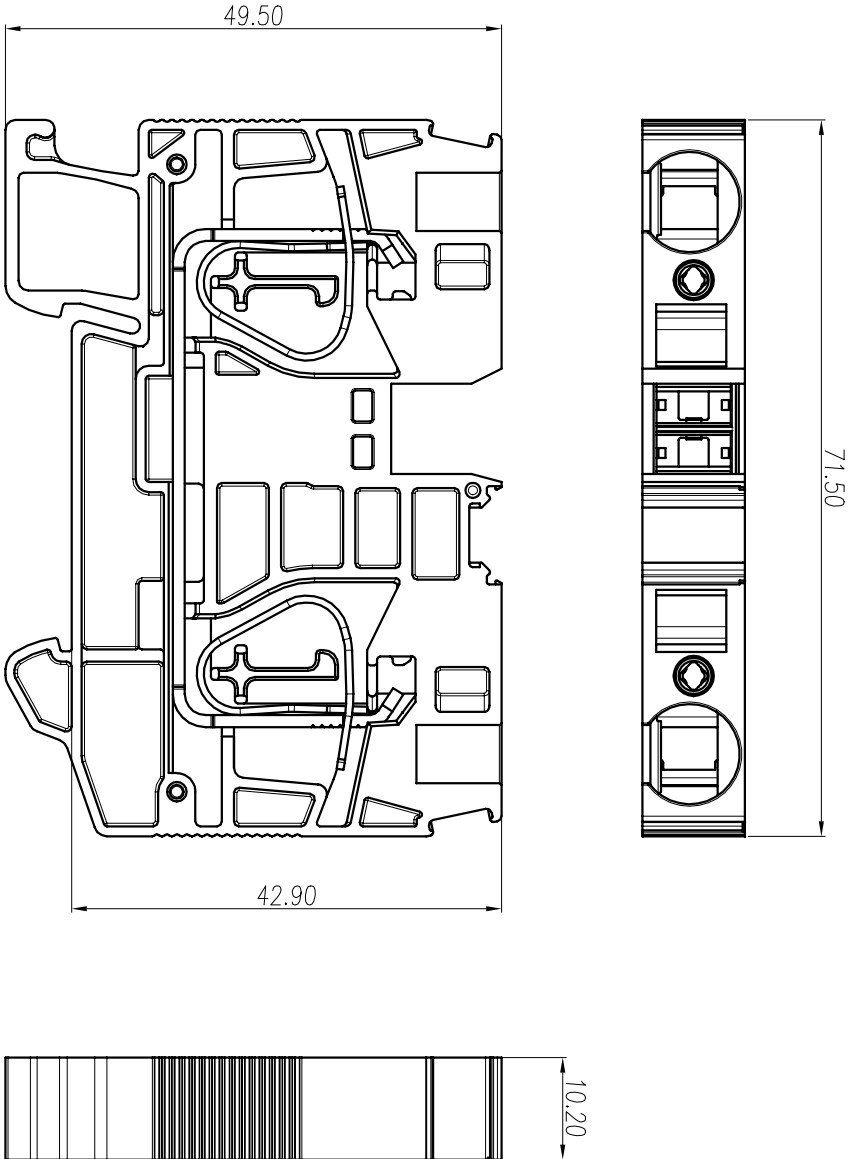

UL/CUL 技术参数 (UL1059)					cFUSE			
UL/CUL Technical Data								
等级	Use Group	B	C	D				
额定电压	Rated Voltage	V	600	600	600			
额定电流	Rated Current	A	65	65	5			
耐电压	Withstanding Voltage	2200V/1Min						
接线范围	Wire Range							
单/多芯线	Solid/Stranded	AWG	24-6					
IEC 技术参数 (IEC8947-1)								
IEC Technical Data								
过电压类别	Overvoltage Category	III						
污染等级	Contamination Class	3						
额定电压	Rated Voltage	V	1000					
额定电流	Rated Current	A	57					
额定冲击电压	Rated withstand voltage	kV	8					
导线截面积 Conductor cross section								
单芯	Solid	mm ²	0.2-16.0					
柔性导线	flexible	mm ²	0.2-10.0					
柔性导线带冲压头	flexible with ferrule	mm ²	0.25-10.0					
材料 Material								
绝缘材料	Insulation Material	PA66						
阻燃等级	Inflammability	UL94V-0						
导体材料	Conductor Material	铜合金 Copper alloy						
导体表面镀层	Conductive Coating	镀锡 Sn Plated						
一般参数 Other Data								
连接点数	connection points	2						
剥线长度	Stripping Length	mm	18					
导线类型	Type of rail	DIN 35						
螺丝	Screw Torque(Max)	N.m	-					
工作温度	Operating temperatur	℃	-40-105					

linear dimension(Tolerances Standard GB/T 14486-2008)									
—									
上									
variable range	to	over 6	over 10	over 30	over 60	over 100	over 160	to	over 10
	6	to 10	to 30	to 60	to 100	to 160	to 10	to 100	to 100
	tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10
									0.30
0.60									
颜色/Color									
红色/Red									
黑色/Black									
黄色/Yellow									
绿色/Green									
蓝色/Blue									
灰色/Gray									
订货号/Order No.									

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1
第三视角/THIRD ANGLE PROJECTION					
名称 / TITLE	GUS10-102-XX-00A				
版本 / REV	V0				



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD