





慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

UL/CUL 技术参数 (UL1059)

UL/CUL Technical Data

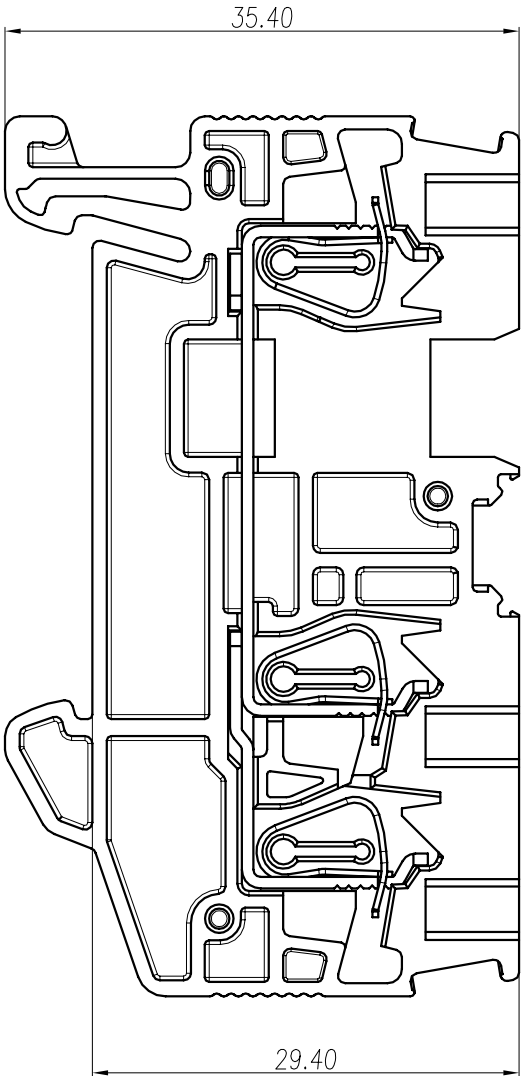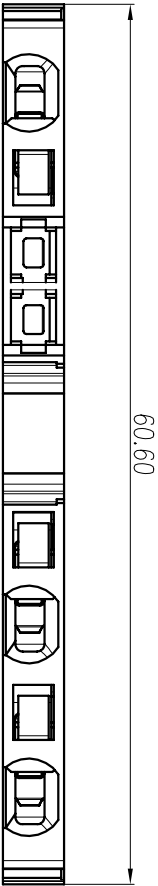

UL/CUL 技术参数 (UL1059)				
UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage	V	300	300 600
额定电流	Rated Current	A	15	15 5
耐电压	Withstanding Voltage	1600V/1Min		
接线范围	Wire Range	26-14		
单/多芯线	Solid/Stranded	[AWG]		
IEC 技术参数 (IEC8947-1)				
IEC Technical Data				
过电压类别	Overvoltage Category	III		
污染等级	Contamination Class	3		
额定电压	Rated Voltage	V		
额定电流	Rated Current	A		
额定冲击电压	Impulse withstand voltage	KV		
导线截面积	Conductor cross section	mm ²		
单芯	Solid	mm ²		
柔性导线	flexible	mm ²		
柔性导线带压头	flexible with ferrule	mm ²		
材料				
绝缘材料	Insulation Material	PA66		
阻燃等级	Inflammability	UL94V-0		
导体材料	Conductor Material	铜合金 Copper alloy		
导体表面镀层	Conductive Coating	镀锡 Sn Plated		
一般参数				
连接点数	connection points	3		
剥线长度	Stripping Length	mm		
导线类型	Type of rail	DIN 35		
螺丝	Screw Torque(Nm)	-		
工作温度	Operating temperatur	°C		

linear dimension (tolerances Standard GB/T 14486-2008)



红色/Red	GLS1.5-103-RD-00A
黑色/Black	GLS1.5-103-BK-00A
黄色/Yellow	GLS1.5-103-YE-00A
绿色/Green	GLS1.5-103-GH-00A
橙色/Orange	GLS1.5-103-OG-00A
蓝色/Blue	GLS1.5-103-BL-00A
灰色/Gray	GLS1.5-103-GY-00A
颜色/Color	订货号/Order No.

tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60
variable range	6 to 10	10 to 30	30 to 60	60 to 100	100 to 160	160 to 100	10 to 100	10 to 100	100 to 100	100 to 100

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1
------------	----	-----------	----	------------	-----



第三视角/THIRD ANGLE PROJECTION

版本 / REV	V0
----------	----



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

名称 / TITLE

GLS1.5-103-XX-00A