

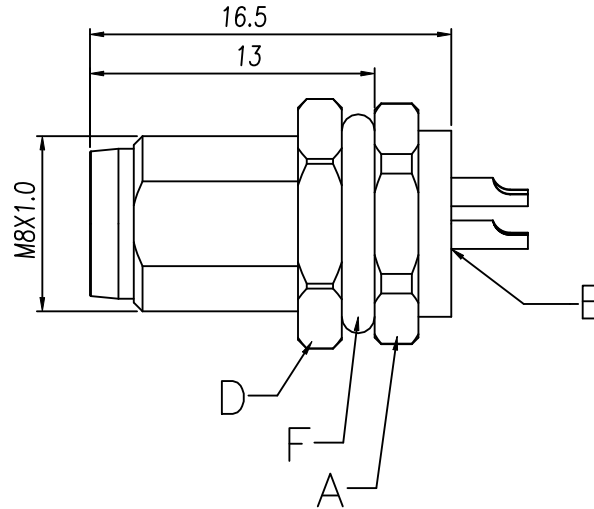


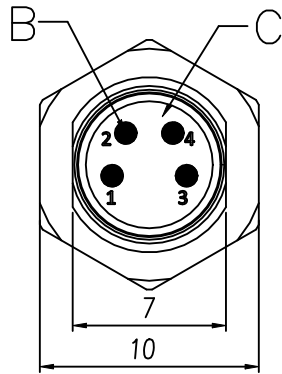


REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	--	/		2021.08.18

IEC 技术参数		IEC61076-2-104	
IEC Technical Data			
工作温度	Operating temperatur [°C]	-25~+80	
防护等级	IP Class (IN Locked condition)	IP67	
额定电压	Rated Voltage [V]		
额定电流	Rated Current [A]		
导线截面积	Conductor cross section		
硬质/柔性导线	Solid/ flexible [mm²]		
接线范围	Wire Range		
单/多芯线	Solid/Stranded [AWG]		
材料 Material			
绝缘材料	Insulation Material	PA 66	
阻燃等级	Imflammability	UL94V-0	
导体材料	Contact Material	铜合金 Copper alloy	
导体镀层	Contactive Coating	镀金 Gold Plated	
螺母/螺丝	Connector Nut/Screw	Brass With Nickel Plated铜镀镍	
符合RoHS环保要求			

Contacts Pin 数	3Pin	4Pin	5Pin	6Pin	8Pin
Coding 编码	 A-Coding	 A-Coding	 B-Coding	 A-Coding	 A-Coding
Rated Current 额定电流	3A	3A	3A	1.5A	1.5A
Rated Voltage 额定电压	60V	60V	30V	30V	30V
Wire Range线范围	24AWG	24AWG	24AWG	26AWG	26AWG
PART NO. 品名:	M08-A03-ST0-M02-BQ1	M08-A04-ST0-M02-BQ1	M08-B05-ST0-M02-BQ1	M08-A06-ST0-M02-BQ1	M08-A08-ST0-M02-BQ1
Customized.定制化:					

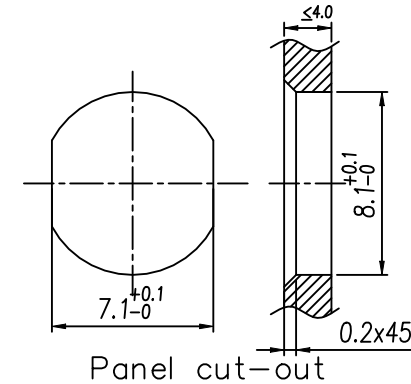

F		O-Ring	O-Ring FKM Black	pcs	1
E		Resin	Black epoxy resin for sealing	g	2
D		Nut	Nut:M8X1.0,Brass With Nickel Plated	pcs	1
C		Housing	M8 Male,Black PA66	pcs	1
B		Terminal	Male Terminal ,Brass With Gold Plated	pcs	X
A		Screw	Screw M8X1.0,Brass With Nickel Plated	pcs	1
编号 No.	料号 Materials.No	品名 Name	材 料 规 格 Description	单位 Unit	用量 Qty

		慈溪市万捷电子有限公司				PART NO.: M08-AXX-ST0-M02-BQ1			
		CIXI WANJIE ELECTRONIC CO., LTD							
NO SPECIFIED TOLERANCE		Cus' P/N:			Order No.:	---		Drawing No.:	SP-02-M000XX
LINEAR	0.5~6	±0.1	DES.	Jun	DATE		UNITS	mm	THIRD ANGLE PROJECTION  1 of 1
	6~30	±0.2	CHK.		DATE		SIZE	A4	
	>30	±2%	APP.		DATE		SCALE	X:X	
ANGLES	±1°				DATE		SCALE	X:X	文件等级: 外部公开