






慈溪市万捷电子有限公司

CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

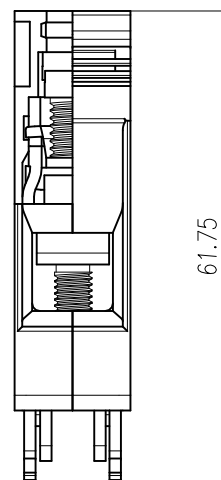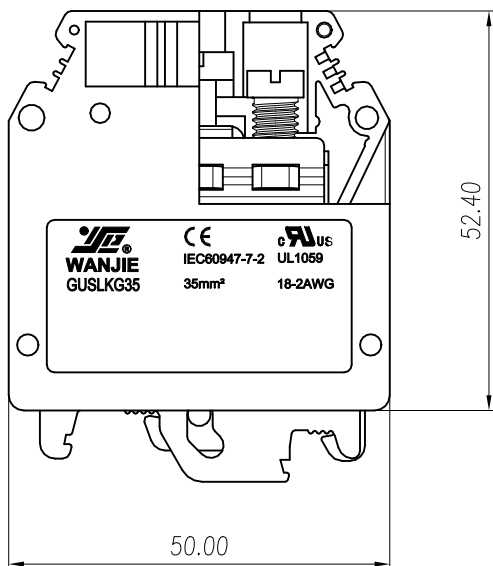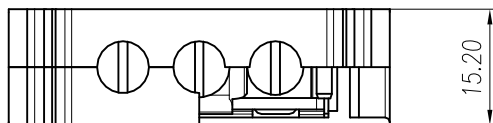

UL/CUL 技术参数 (UL1059)		
UL/CUL Technical Data		
接线范围 单/多芯线	Wire Range Solid/Stranded [AWG]	18-2
IEC 技术参数 (IEC60947-7-2) IEC Technical Data		
过电压类别	Overvoltage Category	III
污染等级	Contamination Class	3
导线截面积 Conductor cross section		
单芯	Solid [mm²]	10-35
柔性导线	flexible [mm²]	10-35
柔性导线带冷压头 flexible with ferrule	[mm²]	10-35
材料 Material		
绝缘材料	Insulation Material	PA66
阻燃等级	Imflammability	UL94 V-0
导体材料	Contactior Material	铜合金 Copper alloy
导体表面镀层	Contactive Coating	镀镍 Ni Plated
一般参数 Other Data		
连接点数	connection points	2
剥线长度	Stripping Length [mm]	16-17
导轨类型	Type of rail	DIN 35/DIN 32
螺丝 Screw/扭矩 Torque(Max)	[N·m]	M6/3.2-3.7
工作温度	Operating temperatur [°C]	-40~105

linear dimension(Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 200	to 10	over 10 to 100	over 100 to 200
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

黄绿色 / Green-yellow	GUSLKG35-102-PE-00A
颜色 / Colour	订货号 / Order No.

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角 / THIRD ANGLE PROJECTION	版本 / REV	V0
						名称 / TITLE	GUSLKG35-102-PE-00A	



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD