




慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD			
REV.	DESCRIPTION	ECN No.	APPROVED

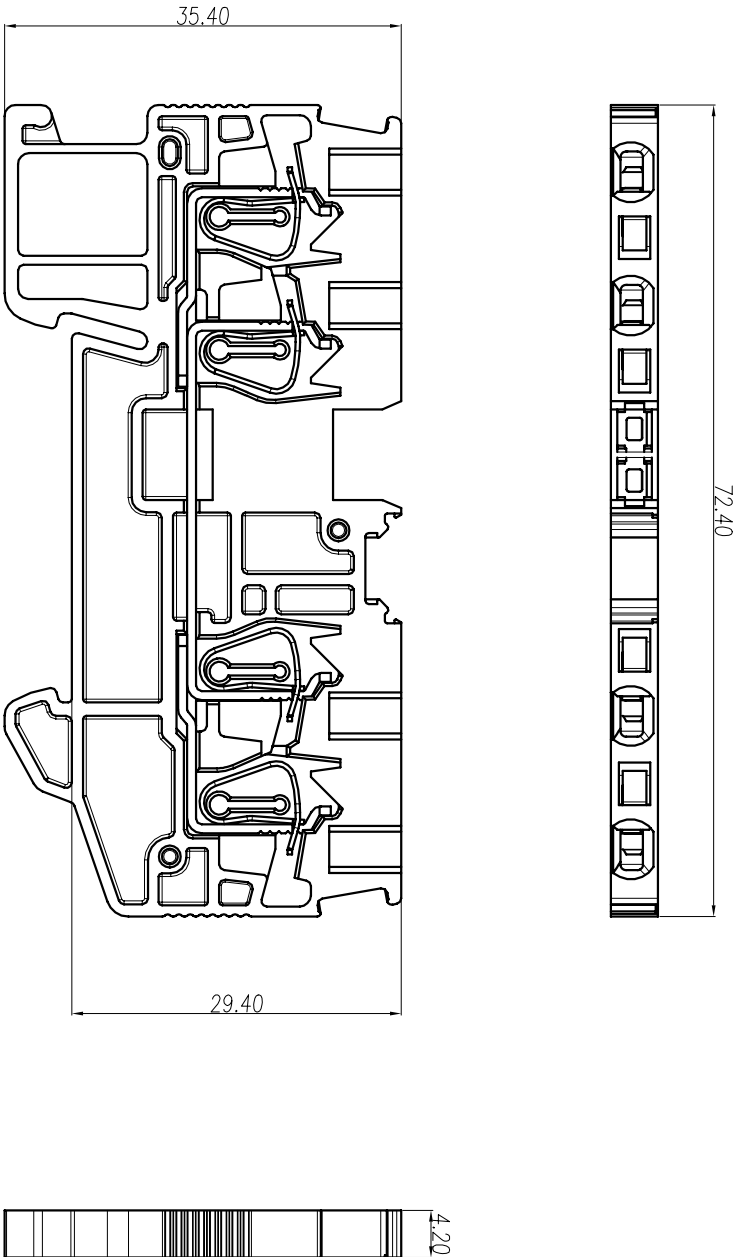

UL/CUL 技术参数 (UL1059)				cPuls			
UL/CUL Technical Data							
等级	Use Group	B	C	D			
额定电压	Rated Voltage	V	300	300	600		
额定电流	Rated Current	A	15	15	5		
耐电压	Withstanding Voltage	1600V/1Min					
接线范围	Wire Range						
单芯芯线	Solid/Stranded	AWG					
26-14							
IEC 技术参数 (IEC8947-7-1)							
IEC Technical Data							
过电压类别	Overvoltage Category	III					
污染等级	Contamination Class	3					
额定电压	Rated Voltage	V					
额定电流	Rated Current	A					
额定冲击电压		17.5					
Impulse withstand voltage		kV					
6							
导线截面积 Conductor cross section							
单芯	Solid	mm²					
柔性导线	flexible	mm²					
柔性导线带冲压头		mm²					
flexible with ferrule		mm²					
0.2-1.5							
材料 Material							
绝缘材料	Insulation Material	PA66					
阻燃等级	Inflammability	UL94V-0					
导体材料	Conductor Material	铜合金 Copper alloy					
导体表面镀层	Conductive Coating	镀锡 Sn Plated					
一般参数 Other Data							
连接点数	connection points	4					
剥线长度	Stripping Length	mm					
8-10							
导线类型	Type of rail	DIN 35					
螺丝 Screw/扭矩 Torque(Max)	[N.m]	-					
工作温度	Operating temperatur	°C					
-40-105							

linear dimension(Tolerances Standard GB/T 14486-2008)									
	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 100	over 100 to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30 0.60

红色/Red	GUS1.5-104-RD-00A
黑色/Black	GUS1.5-104-BK-00A
黄色/Yellow	GUS1.5-104-YE-00A
绿色/Green	GUS1.5-104-GN-00A
橙色/Orange	GUS1.5-104-OG-00A
蓝色/Blue	GUS1.5-104-BU-00A
灰色/Gray	GUS1.5-104-GY-00A
颜色/Colour	订货号 /Order No.

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1
第三视角/THIRD ANGLE PROJECTION					
名称 / TITLE	GUS1.5-104-XX-00A				版本 / REV V0



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD