


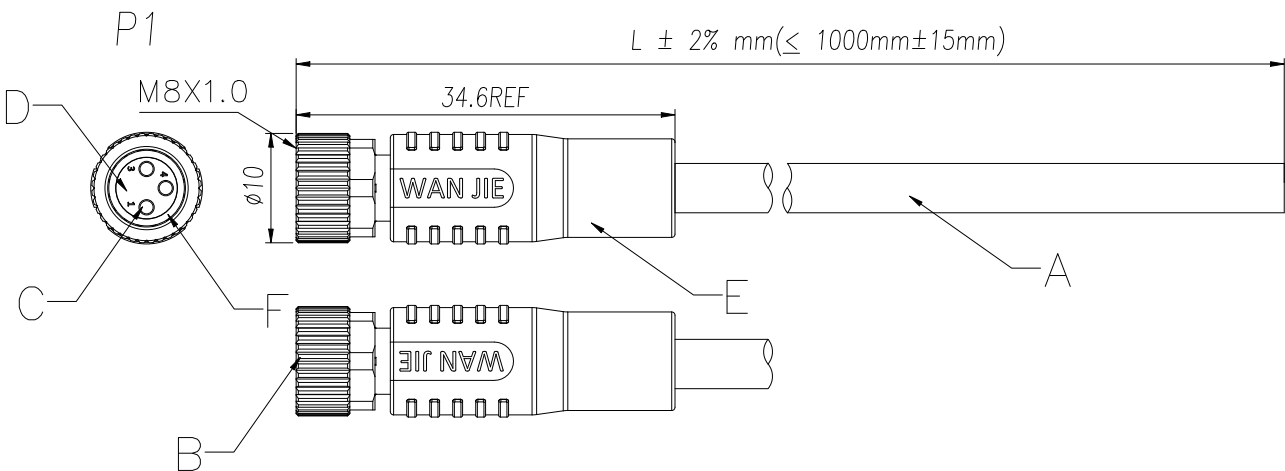

Contacts Pin 数	3Pin	4Pin	5Pin	6Pin	8Pin
Coding 编码	 A-Coding	 A-Coding	 B-Coding	 A-Coding	 A-Coding
Rated Current 额定电流	3A	3A	3A	1.5A	1.5A
Rated Voltage 额定电压	60V	60V	30V	30V	30V
Wire Range 线范围	24AWG	24AWG	24AWG	26AWG	26AWG
PART NO. 品名 (0.15m):	M08-A03-ST0-F02-BCC-015	M08-A04-ST0-F02-BCC-015	M08-B05-ST0-F02-BCC-015	M08-A06-ST0-F02-BCC-015	M08-A08-ST0-F02-BCC-015
PART NO. 品名 (1m):	M08-A03-ST0-F02-BCC-100	M08-A04-ST0-F02-BCC-100	M08-B05-ST0-F02-BCC-100	M08-A06-ST0-F02-BCC-100	M08-A08-ST0-F02-BCC-100
PART NO. 品名 (1.5m):	M08-A03-ST0-F02-BCC-150	M08-A04-ST0-F02-BCC-150	M08-B05-ST0-F02-BCC-150	M08-A06-ST0-F02-BCC-150	M08-A08-ST0-F02-BCC-150
PART NO. 品名 (2m):	M08-A03-ST0-F02-BCC-200	M08-A04-ST0-F02-BCC-200	M08-B05-ST0-F02-BCC-200	M08-A06-ST0-F02-BCC-200	M08-A08-ST0-F02-BCC-200
PART NO. 品名 (3m):	M08-A03-ST0-F02-BCC-300	M08-A04-ST0-F02-BCC-300	M08-B05-ST0-F02-BCC-300	M08-A06-ST0-F02-BCC-300	M08-A08-ST0-F02-BCC-300
PART NO. 品名 (5m):	M08-A03-ST0-F02-BCC-500	M08-A04-ST0-F02-BCC-500	M08-B05-ST0-F02-BCC-500	M08-A06-ST0-F02-BCC-500	M08-A08-ST0-F02-BCC-500
Customized 定制化:					

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	--	/		2021.08.18

IEC 技术参数		IEC61076-2-104
IEC Technical Data		
工作温度 Operating temperatur [°C]	-25~+80	
防护等级 IP Class (IN Locked condition)	IP67	
额定电压 Rated Voltage [V]	_____	
额定电流 Rated Current [A]	_____	
导线截面积Conductor cross section 硬质/柔性导线 Solid/ flexible [mm²]	_____	
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	_____	
材料 Material		
绝缘材料 Insulation Material	PA 66	
阻燃等级 Imflammability	UL94V-0	
导体材料 Contactor Material	铜合金 Copper alloy	
导体镀层 Contactive Coating	镀金 Gold Plated	
螺母/螺丝 Connector Nut/Screw	Brass With Nickel Plated铜镀镍	
符合RoHS环保要求		

M08-X XX-ST0-F02-BCC-XXX
Coding: A, B
Pin Number: 03, 04, 05,
Cable Length L:
050=0.5m; 100=1.0m; 10M=10m;

F		O-Ring	O-Ring FKM Orange	pcs	1
E		PUR	Molded With Black PUR	G	5
D		Housing	Housing Female ,Black PA66,UL94V-0	pcs	1
C		Terminal	Female Terminal ,Brass With Gold Plated	pcs	X
B		Screw	Screw M8X1.0,Brass With Nickel Plated	pcs	1
A		Cable	UL 2464 AWG+AL+Braid Black PVC Jacket	mm	X
编号 No.	料号 Materials.No	品名 Name	材 料 规 格 Description	单位 Unit	用量 Qty

		慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD				PART NO.: M08-XXX-ST0-F02-BCC-XXX	
NO SPECIFIED TOLERANCE		Cus' P/N:		Order No: ---		Drawing No.:	SP-02-M000XX
LINEAR	0.5~6	±0.1	DES.	JUN	DATE	UNITS	mm
	6~30	±0.2	CHK.		DATE	SIZE	A4
ANGLES	>30	±2%	APP.		DATE	SCALE	X:X
	±1°					文件等级: 外部公开	
						THIRD ANGLE PROJECTION	PAGE
							1 of 2

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	--	—		2021.08.18

3Pin

P1	Wirelist
1	brown
3	blue
4	black

4Pin

P1	Wirelist
1	brown
2	white
3	blue
4	black

5Pin

P1	Wirelist
1	brown
2	white
3	blue
4	black
5	grey

8Pin

P1	Wirelist
1	white
2	brown
3	green
4	yellow
5	grey
6	pink
7	blue
8	red

6Pin

P1	Wirelist
1	brown
2	white
3	blue
4	black
5	grey
6	pink

 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD							PART NO.: M08-XXX-ST0-F02-BCC-XXX				
NO SPECIFIED TOLERANCE			Cus' P/N:		Order No :		---		Drawing No.:	SP-02-M000XX	
LINEAR	0.5~6	±0.1	DES.	Jun	DATE		UNITS	mm	THIRD ANGLE PROJECTION 		PAGE
	6~30	±0.2									
		>30	±2%	CHK.		DATE		SIZE	A4	2 of 2	
ANGLES		±1°	APP.		DATE		SCALE	X:X	文件等级：外部公开		