


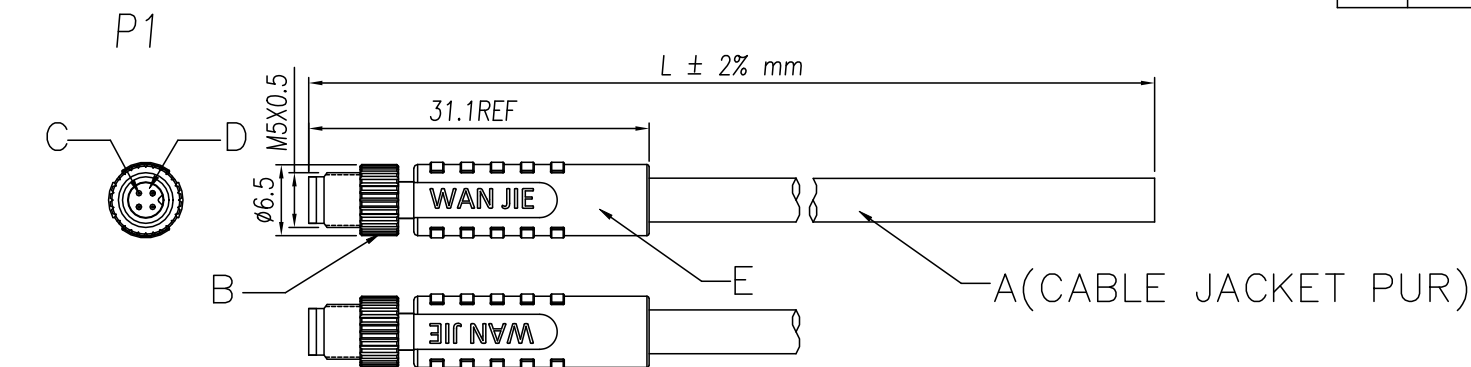

Contacts Pin 数	3Pin	4Pin
Coding 编码	 A-Coding	 A-Coding
Rated Current 额定电流	1A	1A
Rated Voltage 额定电压	60V	60V
Wire Range 线范围	26AWG	26AWG
PART NO. 品名 (1.0m):	M05-A03-ST0-M02-BCR-100	M05-A04-ST0-M02-BCR-100
PART NO. 品名 (2.0m):	M05-A03-ST0-M02-BCR-200	M05-A04-ST0-M02-BCR-200
PART NO. 品名 (3.0m):	M05-A03-ST0-M02-BCR-300	M05-A04-ST0-M02-BCR-300
PART NO. 品名 (5.0m):	M05-A03-ST0-M02-BCR-500	M05-A04-ST0-M02-BCR-500
Customized 定制化:		

3Pin
Wirelist
1 brown
3 blue
4 black

4Pin
Wirelist
1 brown
2 White
3 blue
4 black

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	--	/		2021.08.25

IEC 技术参数		IEC61076-2-105	
IEC Technical Data			
工作温度	Operating temperatur [°C]		-25~+80
防护等级	IP Class (IN Locked condition)		IP67
额定电压	Rated Voltage [V]		60
额定电流	Rated Current [A]		1
导线截面积Conductor cross section			0.14
硬质/柔性导线 Solid/ flexible [mm²]			
接线范围	Wire Range		26
单/多芯线 Solid/Stranded [AWG]			
材料			Material
绝缘材料	Insulation Material		PA 66
阻燃等级	Imflammability		UL94V-0
导体材料	Contactur Material		铜合金 Copper alloy
导体镀层	Contactive Coating	镀金 Gold Plated	
螺母/螺丝	Connector Nut/Screw	Brass With Nickel Plated铜镀镍	
符合RoHS环保要求			

E		PUR	Molded With Black PUR	G	5
D		Housing	A-Coding Male,Black PA66	pcs	1
C		Terminal	Male Terminal ,Brass With Gold Plated	pcs	X
B		Screw	Screw M5X0.5,Brass With Nickel Plated	pcs	1
A		Cable	UL20549 26AWG Black PUR Jacket	mm	XXX
编号 No.	料号 Materials.No	品名 Name	材 料 规 格 Description	单位 Unit	用量 Qty

		慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD				PART NO.: M05-AXX-ST0-M02-BCR-XXX	
NO SPECIFIED TOLERANCE		Cus' P/N:	Order No:		Drawing No.:		SP-02-M000XX
LINEAR	0.5-6	±0.1	DES.	JUN	DATE	UNITS	mm
	6-30	±0.2	CHK.		DATE	SIZE	A4
	>30	±2%	APP.		DATE	SCALE	X:X
ANGLES	±1°						文件等级: 外部公开