



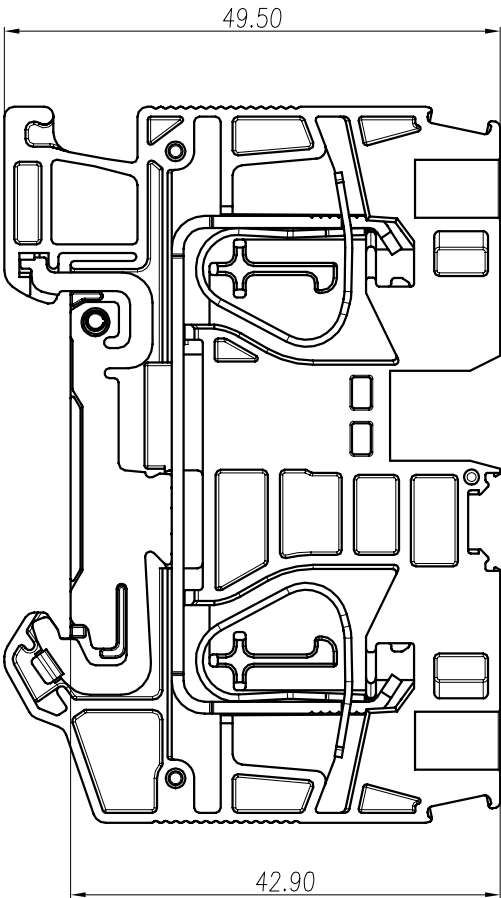

慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE

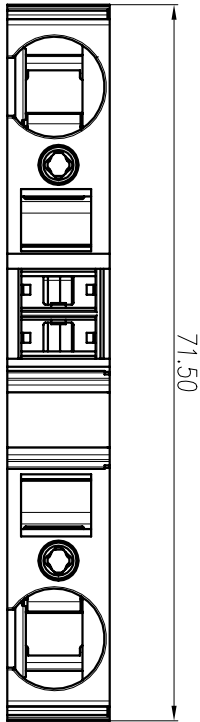

UL/CUL 技术参数 (UL1059)				
UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage	V	-	-
耐电压	Withstanding Voltage	2200V/1Min		
接线范围	Wire Range	24-6		
单/多芯线	Solid/Stranded	[AWG]		
IEC 技术参数 (IEC8947-2)				
IEC Technical Data				
过电压类别	Overvoltage Category	III		
污染等级	Contamination Class	3		
额定电压	Rated Voltage	V	-	
额定冲击电压	Rated impulse voltage	[kV]	8	
导线横截面积 Conductor cross section				
单芯	Solid	[mm²]	0.2-16.0	
柔性导线	flexible	[mm²]	0.2-10.0	
柔性导线带冲压头	flexible with ferrule	[mm²]	0.25-10.0	
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Inflammability	UL94V-0		
导体材料	Conductor Material	铜合金 Copper alloy		
导体表面镀层	Conductive Coating	镀锡 Sn Plated		
一般参数 Other Data				
连接点数	connection points	2		
剥线长度	Stripping Length	[mm]	18	
导线类型	Type of rail	DIN 35		
螺丝 扭矩	Torque(Max)	[N.m]	-	
工作温度	Operating temperatur	[°C]	-40~105	

linear dimension(Tolerances Standard GB/T 14486-2008)											
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 100		
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60	

黄绿色 green-yellow	GUS10-102-PE-00A
颜色/Color	订货号/Order No.

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1
第三视角/THIRD ANGLE PROJECTION					
名称 / TITLE	GUS10-102-PE-00A				
版本 / REV	V0				



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD