
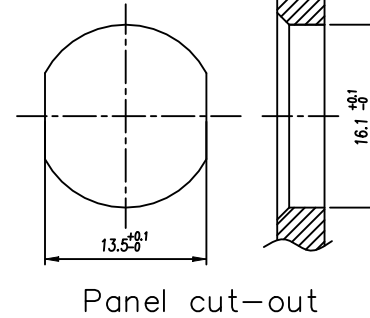
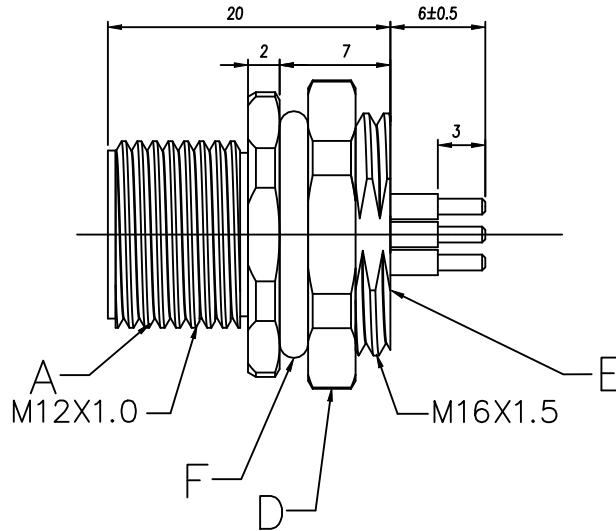


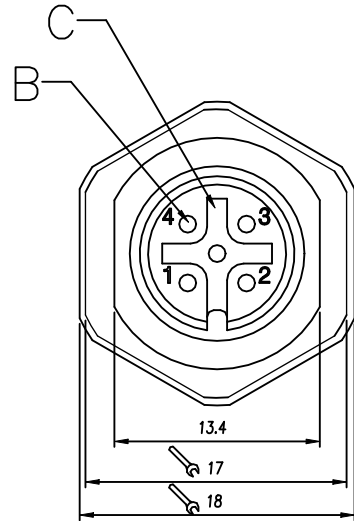

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

IEC 技术参数

IEC61076-2-101


IEC Technical Data

工作温度 Operating temperatur [°C]	-25~+80
防护等级 IP Class (IN Locked condition)	IP67
额定电压 Rated Voltage [V]	
额定电流 Rated Current [A]	
导线截面积 Conductor cross section	
硬质/柔性导线 Solid/ flexible [mm²]	
接线范围 Wire Range	
单/多芯线 Solid/Stranded [AWG]	
材料 Material	
绝缘材料 Insulation Material	PA 66
阻燃等级 Imflammability	UL94V-0
导体材料 Contactor Material	铜合金 Copper alloy
导体镀层 Contactive Coating	镀金 Gold Plated
螺母/螺丝 Connector Nut/Screw	Brass With Nickel Plated 铜镀镍

符合RoHS环保要求

Contacts Pin 数	3Pin	4Pin	5Pin	8Pin	12Pin	17Pin
A-Coding						
Rated Current 额定电流	4A	4A	4A	2A	1.5A	1.5A
Rated Voltage 额定电压	250V	250V	60V	30V	30V	30V
Pin Size 导体直径	1.0mm	1.0mm	1.0mm	0.8mm	0.6mm	0.6mm
PART NO. 品名:	M12-A03-ST0-M01-BH1	M12-A04-ST0-M01-BH1	M12-A05-ST0-M01-BH1	M12-A08-ST0-M01-BH1	M12-A12-ST0-M01-BH1	M12-A17-ST0-M01-BH1
Customized 定制化:						

PCB Layout:

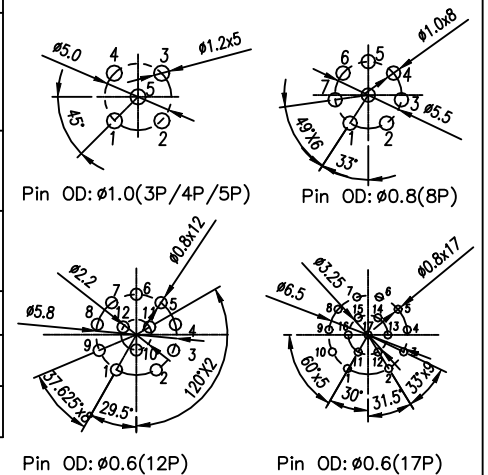

F		O-Ring	O-Ring FKM Black	pcs	1
E		Resin	Black epoxy resin for sealing	g	2
D		Nut	Nut: M16 X1.5,Brass With Nickel Plated	pcs	1
C		Housing	A-Coding Male,Black PA66	pcs	1
B		Terminal	Male Terminal ,Brass With Gold Plated	pcs	X
A		Screw	Screw M12 X1.0,Brass With Nickel Plated	pcs	1
编号 No.	料号 Materials.No	品名 Name	材 料 规 格 Description	单 位 Unit	用 量 Qty

				慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD				PART NO.: M12- <u>AXX</u> -ST0-M01-BH1			
NO SPECIFIED TOLERANCE				Cus' P/N:		Order No :		---		Drawing No.: SP-02-M00XXX	
LINEAR	0.5~6	±0.1	DES.	Jun	DATE		UNITS	mm	THIRD ANGLE PROJECTION	PAGE	
	6~30	±0.2									
	>30	±2%									
ANGLES		±1°	APP.		DATE		SCALE	X:X	文件等级: 外部公开		