


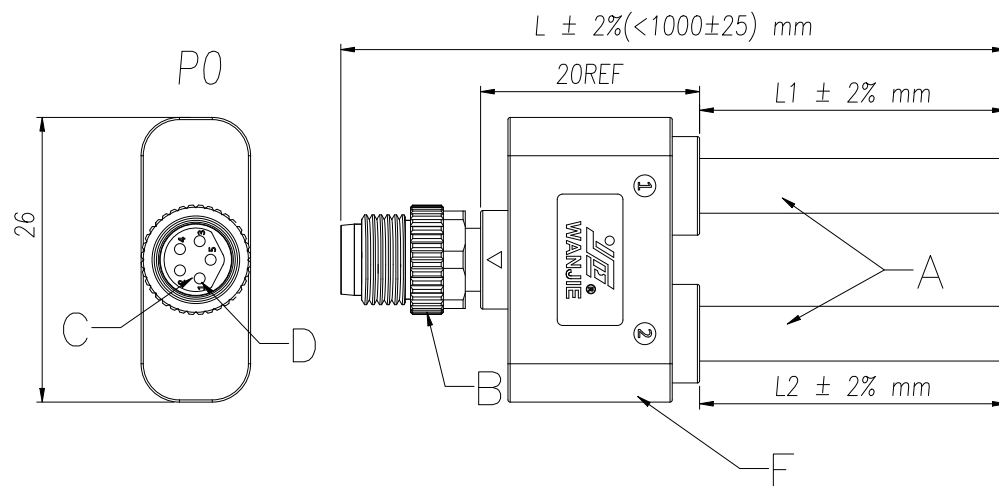

P1

P2

Contacts Pin 数	3Pin	4Pin	5Pin
Coding 编码	 A-Coding	 A-Coding	 B-Coding
Rated Current 额定电流	3A	3A	3A
Rated Voltage 额定电压	60V	60V	30V
Wire Range 线范围	24AWG	24AWG	24AWG
PART NO. 品名 (1.0M):	M08-A03-ST0-M02-BVC-100	M08-A04-ST0-M02-BVC-100	M08-B05-ST0-M02-BVC-100
PART NO. 品名 (2.0M):	M08-A03-ST0-M02-BVC-200	M08-A04-ST0-M02-BVC-200	M08-B05-ST0-M02-BVC-200
PART NO. 品名 (3.0M):	M08-A03-ST0-M02-BVC-300	M08-A04-ST0-M02-BVC-300	M08-B05-ST0-M02-BVC-300
PART NO. 品名 (5.0M):	M08-A03-ST0-M02-BVC-500	M08-A04-ST0-M02-BVC-500	M08-B05-ST0-M02-BVC-500
CuRAiomized. 定制化:			

E		PUR	Molded With Black PUR	G	8
D		Housing	Housing Male ,Black PA66	pcs	1
C		Terminal	Male Terminal ,Brass With Gold Plated	pcs	X
B		Screw	Screw M8X1.0,Brass With Nickel Plated	pcs	1
A		Cable	UL AWM 24AWG Black PVC Jacket	mm	L
编号 No.	料号 Materials.No	品名 Name	材 料 规 格 Description	单位 Unit	用量 Qty

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	--	/		2021.08.18

IEC 技术参数		IEC61076-2-104
IEC Technical Data		
工作温度	Operating temperatur [°C]	-25~+80
防护等级	IP Class (IN Locked condition)	IP67
额定电压	Rated Voltage [V]	_____
额定电流	Rated Current [A]	_____
导线截面积	Conductor cross section	_____
硬质/柔性导线	Solid/ flexible [mm²]	
接线范围	Wire Range	_____
单/多芯线	Solid/RAranded [AWG]	
材料 Material		
绝缘材料	Insulation Material	PA 66
阻燃等级	Imflammability	UL94V-0
导体材料	Contactore Material	铜合金 Copper alloy
导体镀层	Contactive Coating	镀金 Gold Plated
螺母/螺丝	Connector Nut/Screw	Brass With Nickel Plated铜镀镍
符合RoHS环保要求		

M08-X XX-ST0-M02-BVC-XXX
Coding: A, B
Pin Number: 03, 04, 05,
Cable Length L:
050=0.5m; 100=1.0m; 10M=10m;

		慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD				PART NO.: M08-XXX-ST0-M02-BVC-XXX	
NO SPECIFIED TOLERANCE		Cus' P/N:		Order No: ---		Drawing No.:	SP-02-M000XX
LINEAR	0.5~6	±0.1	DES.	JUN	DATE	UNITS	mm
	6~30	±0.2	CHK.		DATE	SIZE	A4
ANGLES	>30	±2%	APP.		DATE	SCALE	X:X
	±1°					文件等级: 外部公开	
						THIRD ANGLE PROJECTION	PAGE
							1 of 2

