
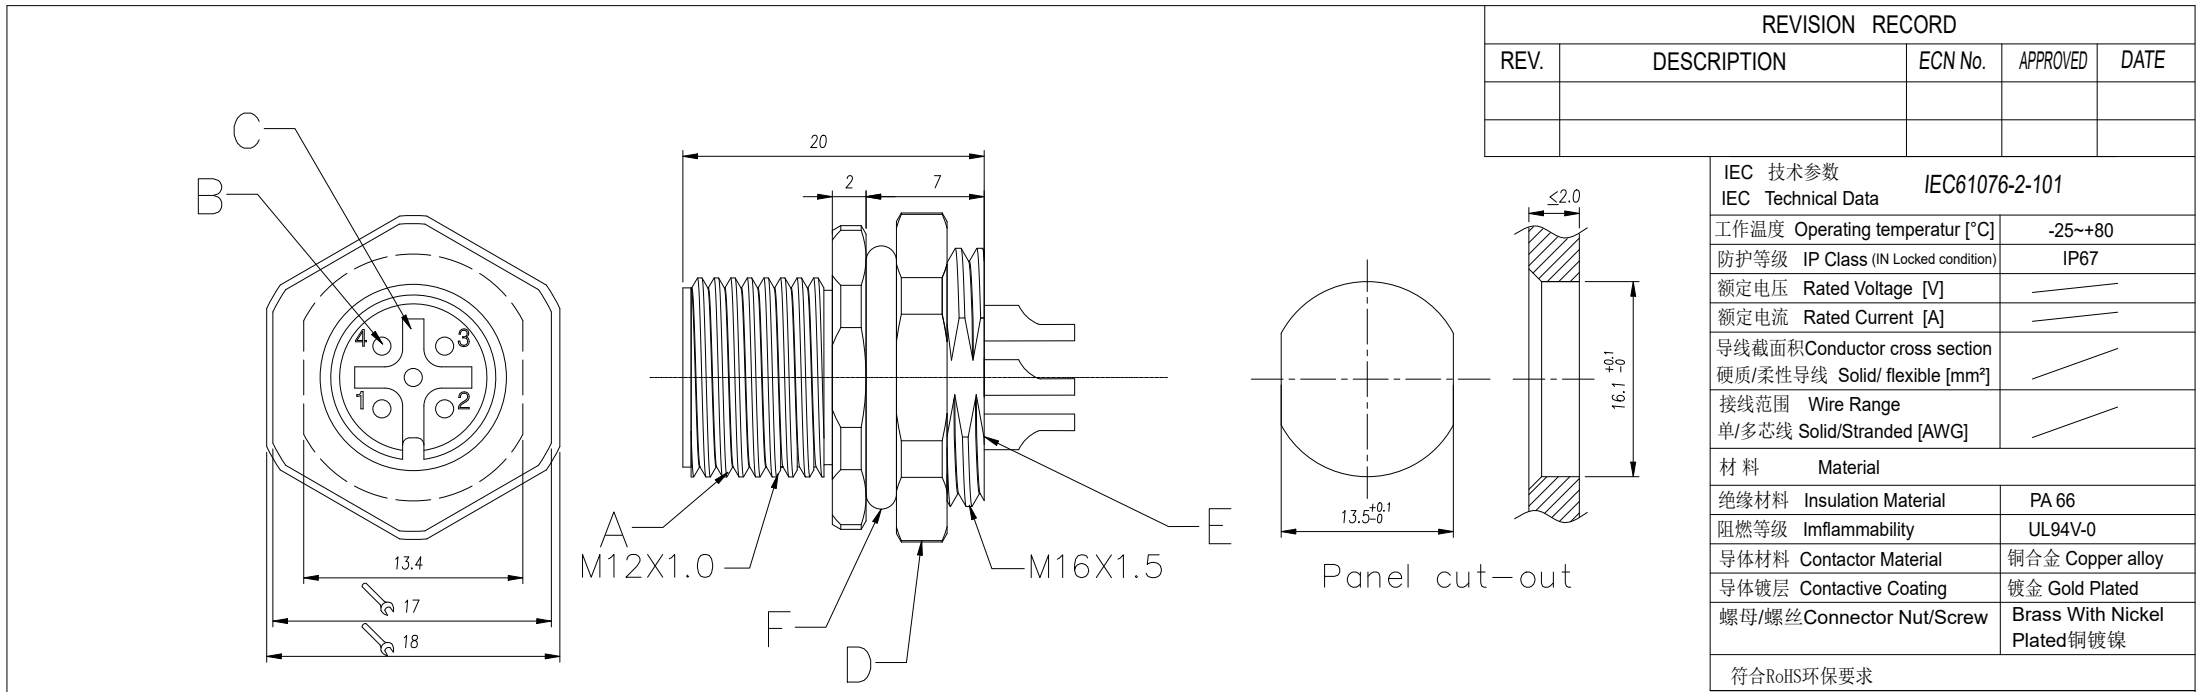







Contacts Pin 数	3Pin	4Pin	5Pin	6Pin	8Pin	12Pin	17Pin
A—Coding							
Rated Current 额定电流	4A	4A	4A	2A	2A	1.5A	1.5A
Rated Voltage 额定电压	250V	250V	60V	30V	30V	30V	30V
Wire Range线范围	22AWG	22AWG	22AWG	24AWG	24AWG	26AWG	26AWG
PART NO. 品名:	M12-A03-ST0-M02-BH1	M12-A04-ST0-M02-BH1	M12-A05-ST0-M02-BH1	M12-A06-ST0-M02-BH1	M12-A08-ST0-M02-BH1	M12-A12-ST0-M02-BH1	M12-A17-ST0-M02-BH1
Customized定制化:							

F		O—Ring	O—Ring FKM Black	pcs	1
E		Resin	Black epoxy resin for sealing	g	2
D		Nut	Nut: M16 X1.5,Brass With Nickel Plated	pcs	1
C		Housing	A—Coding Male 5PIN,Black PA66	pcs	1
B		Terminal	Male Terminal ,Brass With Gold Plated	pcs	X
A		Screw	Screw M12 X1.0,Brass With Nickel Plated	pcs	1
编号 No.	料号 Materials.No	品名 Name	材料规格 Description	单位 Unit	用量 Qty

慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD							PART NO.: M12-AXX-ST0-M02-BH1				
NO SPECIFIED TOLERANCE			Cus' P/N:	Order No :			---		Drawing No.:	SP-02-M00XXX	
LINEAR	0.5~6	±0.1	DES.	Jun	DATE			UNITS	mm	THIRD ANGLE PROJECTION 	PAGE
	6~30	±0.2	CHK.		DATE			SIZE	A4		1 of 1
	>30	±2%	APP.		DATE			SCALE	X:X		
ANGLES	±1°		APP.		DATE			SCALE	X:X	文件等级:外部公开	