


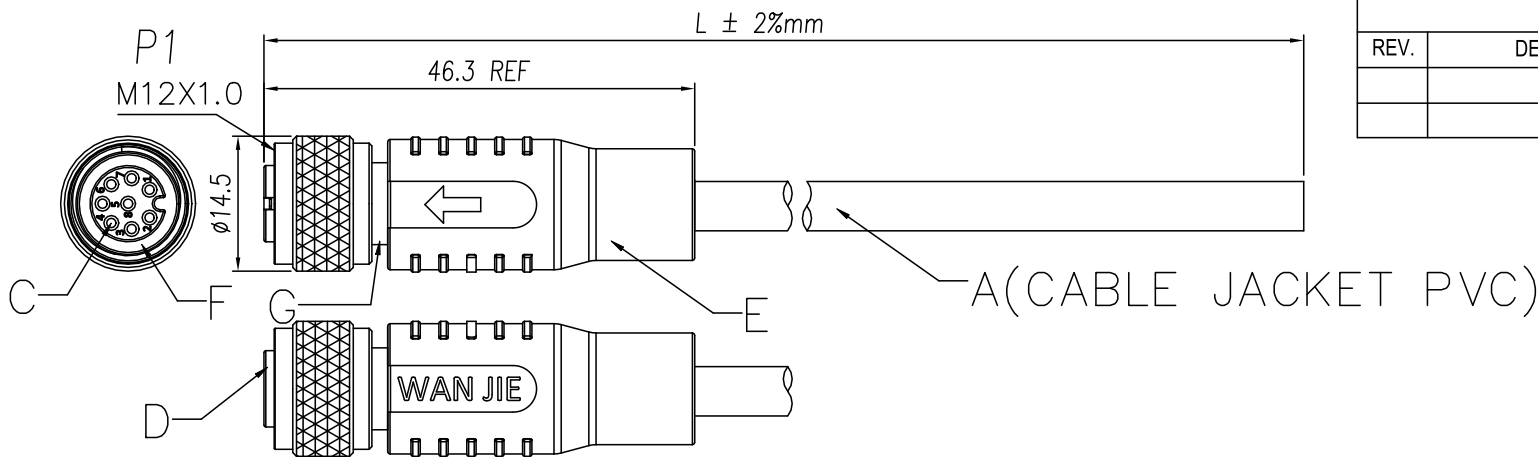

Contacts Pin 数	8Pin
A—Coding	
Rated Current 额定电流	2A
Rated Voltage 额定电压	30V
Wire Range线范围	24AWG
PART NO.品名: (1M)	M12-A08-ST2-F02-BCC-100
PART NO.品名: (2M)	M12-A08-ST2-F02-BCC-200
PART NO.品名: (3M)	M12-A08-ST2-F02-BCC-300
PART NO.品名: (5M)	M12-A08-ST2-F02-BCC-500
Customized.定制化	

P1	Wirelist
1	white
2	brown
3	green
4	yellow
5	grey
6	pink
7	blue
8	red
Shield	Braid

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE

IEC 技术参数		IEC61076-2-101
IEC Technical Data		
工作温度	Operating temperatur [°C]	-25~+80
防护等级	IP Class (IN Locked condition)	IP67
额定电压	Rated Voltage [V]	30
额定电流	Rated Current [A]	2
导线截面积	Conductor cross section	0.25
硬质/柔性导线	Solid/ flexible [mm²]	
接线范围	Wire Range	24
单/多芯线	Solid/Stranded [AWG]	
材 料		
绝缘材料	Insulation Material	PA 66
阻燃等级	Imflammability	UL94V-0
导体材料	Contactore Material	铜合金 Copper alloy
导体镀层	Contactive Coating	镀金 Gold Plated
螺母/螺丝	Connector Nut/Screw	Brass With Nickel Plated铜镀镍
符合RoHS环保要求		

G		Pipe	Shield Pipe,Brass With Nickel Plated	pcs	1
F		O-ring	O-ring,FKM Green	pcs	1
E		TPU	Molded With Black TPU	G	8
D		Housing	A-Coding Female 8PIN,Black PA66	pcs	1
C		Terminal	Female Terminal ,Brass With Gold Plated	pcs	8
B		Screw	Screw M12 X1.0,Brass With Nickel Plated	pcs	1
A		Cable	UL TYPE 24AWG X8C+AL+Braid Black PVC Jacket	mm	L
编号 No.	料号 Materials.No	品名 Name	材料规格 Description	单位 Unit	用量 Qty

			慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD					PART NO.: M12-A08-ST2-F02-BCC-XXX		
NO SPECIFIED TOLERANCE			Cus' P/N:		Order No :		---		Drawing No.: SP-02-M0XXXX	
LINEAR	0.5~6	±0.1	DES.	JUN	DATE		UNITS	mm	THIRD ANGLE PROJECTION 	PAGE
	6~30	±0.2								CHK.
	>30	±2%								
ANGLES	±1°		APP.		DATE		SCALE	X:X	文件等级:外部公开	