


REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	--	—		2022.08.22

IEC 技术参数		IEC61076
IEC Technical Data		
工作温度	Operating temperatur [°C]	-25~+80
防护等级	IP Class (IN Locked condition)	IP67
额定电压	Rated Voltage [V]	60
额定电流	Rated Current [A]	3
导线截面积	Conductor cross section	0.25
硬质/柔性导线	Solid/ flexible [mm²]	
接线范围	Wire Range	24
单/多芯线	Solid/Stranded [AWG]	
材 料 Material		
绝缘材料	Insulation Material	PA 66
阻燃等级	Inflammability	UL94V-0
导体材料	Contactore Material	铜合金 Copper alloy
导体镀层	Contactive Coating	镀金 Gold Plated
螺母/螺丝	Connector Nut/Screw	Brass With Nickel Plated铜镀镍
符合RoHS环保要求		

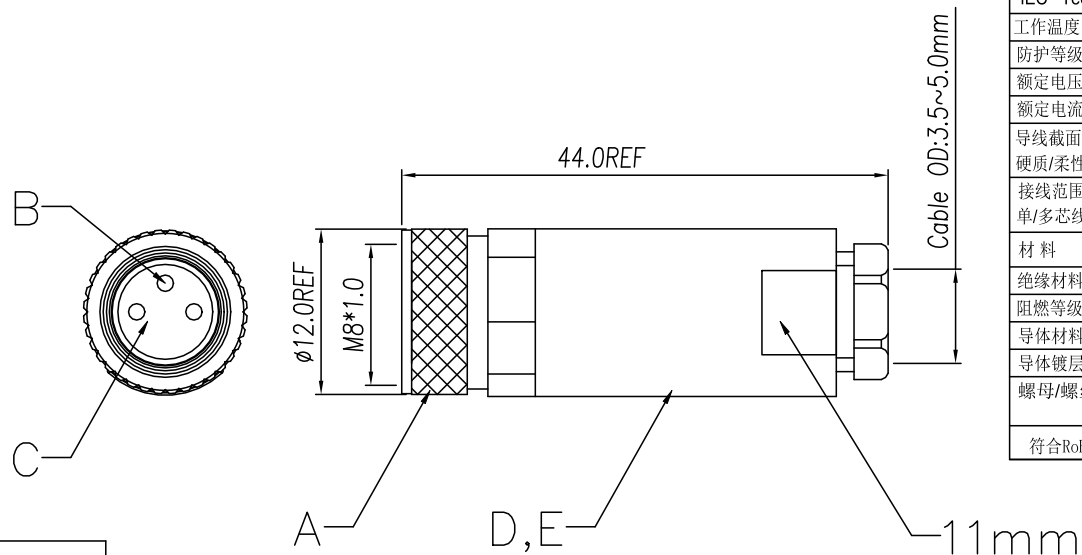

Contacts Pin 数	3Pin	4Pin
A—Coding 编码	 A-Coding	 A-Coding
Rated Current 额定电流	3A	3A
Rated Voltage 额定电压	60V	60V
Wire Range 线范围	24AWG	24AWG
PART NO. 品名:	M08-A03-ST0-F04-PS1	M08-A04-ST0-F04-PS1
Customized. 定制化:		

E		O—Ring	O—Ring FKM Black	pcs	1
D		Carriers	Connector Carriers plastic Black,UL94V-0	SET	1
C		Housing	A—Coding Female,BLACK PA66,UL94V-0	pcs	1
B		Terminal	Female Terminal ,Brass With Gold Plated(Locking Screw)	pcs	X
A		Screw	Screw M8X1.0,Brass With Nickel Plated	pcs	1
编号 No.	料号 Materials.No	品名 Name	材料规格 Description	单位 Unit	用量 Qty

 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD								PART NO.: M08-AXX-ST0-F04-PS1	
NO SPECIFIED TOLERANCE			Cus' P/N:	Order No :		---		Drawing No.:	SP-02-M00185
LINEAR	0.5~6	±0.1	DES.	JUN	DATE		UNITS	mm	THIRD ANGLE PROJECTION  1 of 1
	6~30	±0.2	CHK.		DATE		SIZE	A4	
	>30	±2%	APP.		DATE		SCALE	X:X	
ANGLES	±1°				DATE		SCALE	X:X	文件等级: 外部公开