


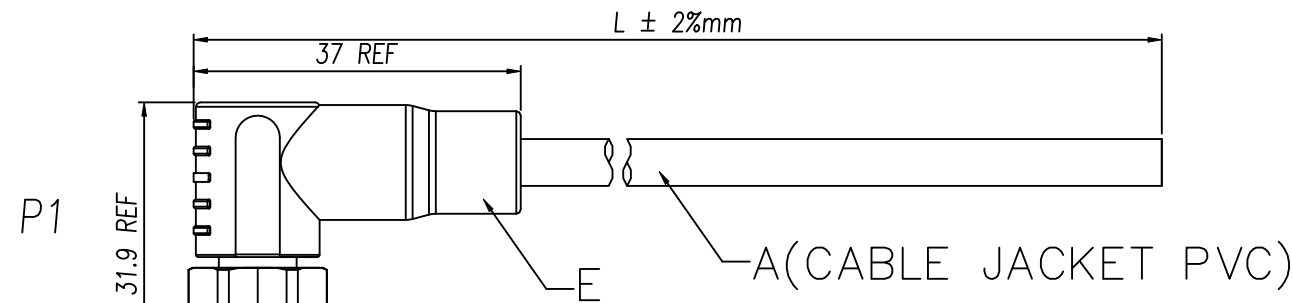

P1	
1	white
2	brown
3	green
4	yellow
5	grey
6	pink
7	blue
8	red

F	O-Ring	O-Ring FKM Green		pcs	1
E	TPU	Molded With Black TPU		G	8
D	Housing	A-Coding Female 8PIN,Black PA66		pcs	1
C	Terminal	Female Terminal ,Brass With Gold Plated		pcs	8
B	Screw	Screw M12 X1.0,Stainless steel		pcs	1
A	Cable	UL TYPE 24AWG X8C Black PVC Jacket		mm	L
编号 No.	料号 Materials.No	品名 Name	材料规格 DeSCCption	单位 Unit	用量 Qty

Contacts Pin 数	8Pin
A-Coding	
Rated Current 额定电流	2A
Rated Voltage 额定电压	30V
Wire Range线范围	24AWG
PART NO. 品名: (1M)	M12-A08-RA0-F02-SCC-100N
PART NO. 品名: (2M)	M12-A08-RA0-F02-SCC-200N
PART NO. 品名: (3M)	M12-A08-RA0-F02-SCC-300N
PART NO. 品名: (5M)	M12-A08-RA0-F02-SCC-500N
Customized.定制化	

REVISION RECORD				
REV.	DESCPTION	ECN No.	APPROVED	DATE
		IEC 技术参数 IEC Technical Data		
		IEC61076-2-101		
		工作温度 Operating temperatur [°C]		-25~+80
		防护等级 IP Class (IN Locked condition)		IP67
		额定电压 Rated Voltage [V]		30
		额定电流 Rated Current [A]		2
		导线截面积Conductor cross section 硬质/柔性导线 Solid/ flexible [mm²]		0.25
		接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]		24
		材 料 Material		
		绝缘材料 Insulation Material		PA 66
		阻燃等级 Imflammability		UL94V-0
		导体材料 Contactor Material		铜合金 Copper alloy
		导体镀层 Contactive Coating		镀金 Gold Plated
		螺母/螺丝 Connector Nut/Screw		不锈钢 Stainless steel
		符合RoHS环保要求		

						慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD				PART NO.: M12-A08-RA0-F02-SCC-XXXX		
NO SPECIFIED TOLERANCE			Cus' P/N:		Order No :		---		Drawing No.:		SP-02-M00XXX	
LINEAR	0.5-6	±0.1	DES.	JUN	DATE		UNITS	mm	THIRD ANGLE PROJECTION 		PAGE 1 of 1	
	6~30	±0.2										
	>30	±2%	CHK.		DATE		SIZE	A4				
ANGLES	±1°		APP.		DATE		SCALE	X:X	文件等级:外部公开			