


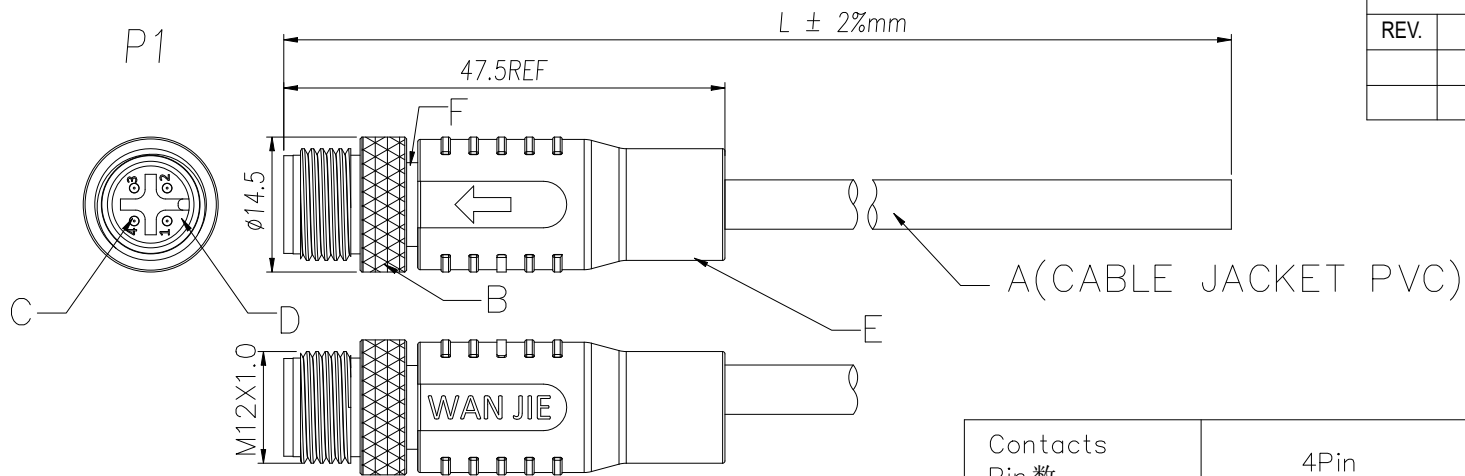

P1	Wirelist
1	brown
2	white
3	blue
4	black
Shield	Braid

Contacts Pin 数	4Pin
A—Coding	
Rated Current 额定电流	4A
Rated Voltage 额定电压	250V
Wire Range线范围	22AWG
PART NO. 品名: (1m)	M12-A04-ST2-M02-BCC-100
PART NO. 品名: (2m)	M12-A04-ST2-M02-BCC-200
PART NO. 品名: (3m)	M12-A04-ST2-M02-BCC-300
PART NO. 品名: (5m)	M12-A04-ST2-M02-BCC-500
Customized. 定制化	M12-A04-ST2-M02-BCC-XXX

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE

IEC 技术参数 IEC Technical Data		IEC61076-2-101
工作温度 Operating temperatur [°C]	-40~+80	
防护等级 IP Class (IN Locked condition)	IP67	
额定电压 Rated Voltage [V]	250	
额定电流 Rated Current [A]	4	
导线截面积 Conductor cross section 硬质/柔性导线 Solid/ flexible [mm²]	0.34	
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22	
材料 Material		
绝缘材料 Insulation Material	PA 66	
阻燃等级 Imflammability	UL94V-0	
导体材料 Contactor Material	铜合金 Copper alloy	
导体镀层 Contactive Coating	镀金 Gold Plated	
螺母/螺丝 Connector Nut/Screw	Copper Alloy With Nickel Plated铜镀镍	
符合RoHS环保要求		

Cable Length L (电线成品长度):
050=0.5m; 100=1.0m; 10M=10m;

F	Pipe	Shield Pipe,Copper Alloy With Nickel Plated	pcs	1	
E	PUR	Molded With Black PUR	G	8	
D	Housing	A—Coding Male 4PIN,Black PA66 UL94V-0	pcs	1	
C	Terminal	Male Terminal ,Copper Alloy With Gold Plated	pcs	4	
B	Screw	Screw M12 X1.0,Copper Alloy With Nickel Plated	pcs	1	
A	Cable	UL TYPE 22AWG X4C+AL+Braid Black PVC Jacket	mm	X	
编号 No.	料号 Materials.No	品名 Name	材料规格 Description	单位 Unit	用量 Qty

		慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD		PART NO.: M12-A04-ST2-M02-BCC-XXX	
NO SPECIFIED TOLERANCE		Cus' P/N:		Order No: ---	
LINEAR	0.5~6	±0.1	DES.	JUN	DATE
	6~30	±0.2	CHK.	DATE	DATE
	>30	±2%	APP.	DATE	DATE
ANGLES	±1°		SCALE	X:X	文件等级: 外部公开
Drawing No.: SP-02-M00XXX		THIRD ANGLE PROJECTION		PAGE 1 of 1	