


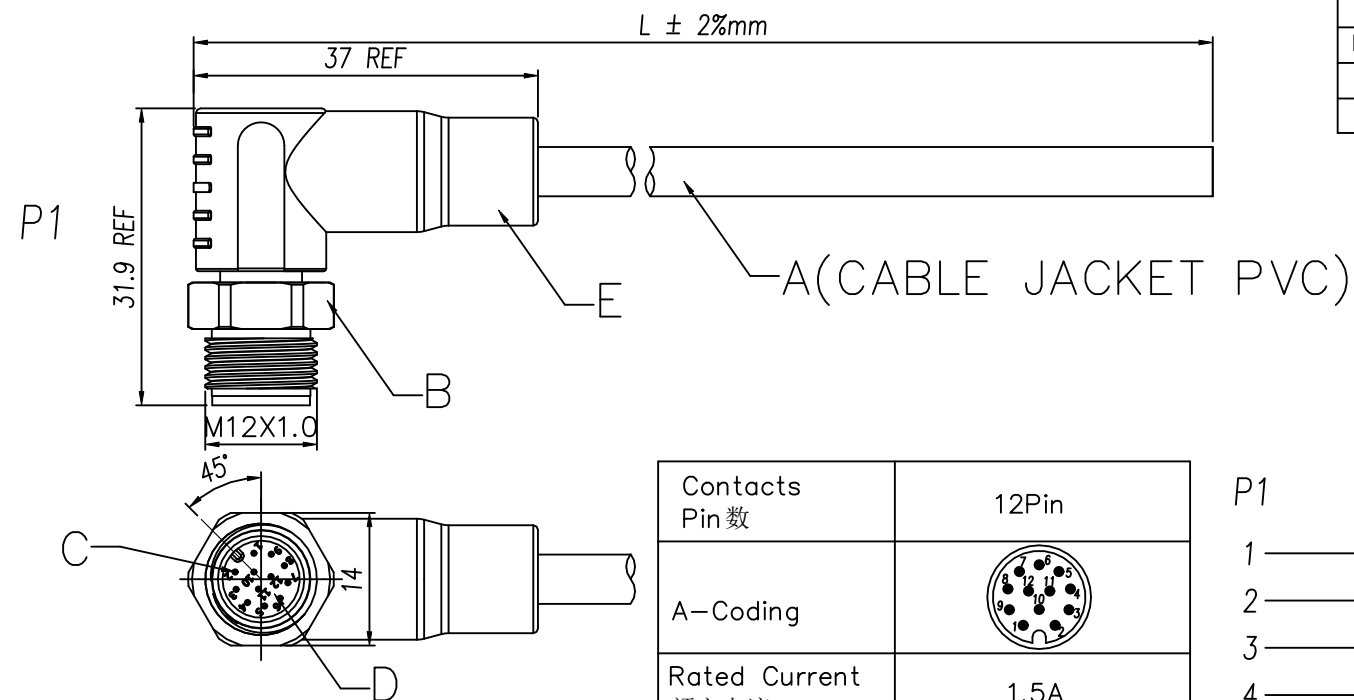


REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE

IEC 技术参数		IEC61076-2-101
IEC Technical Data		
工作温度 Operating temperatur [°C]	-25~+80	
防护等级 IP Class (IN Locked condition)	IP67	
额定电压 Rated Voltage [V]	30	
额定电流 Rated Current [A]	1.5	
导线截面积Conductor cross section 硬质/柔性导线 Solid/ flexible [mm²]	0.14	
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	26	
材 料 Material		
绝缘材料 Insulation Material	PA 66	
阻燃等级 Imflammability	UL94V-0	
导体材料 Contactor Material	铜合金 Copper alloy	
导体镀层 Contactive Coating	镀金 Gold Plated	
螺母/螺丝 Connector Nut/Screw	Brass With Nickel Plated铜镀镍	
符合RoHS环保要求		

Contacts Pin 数	12Pin
A-Coding	
Rated Current 额定电流	1.5A
Rated Voltage 额定电压	30V
Wire Range线范围	26AWG
PART NO. 品名: (1M)	M12-A12-RA0-M02-SCC-100N
PART NO. 品名: (2M)	M12-A12-RA0-M02-SCC-200N
PART NO. 品名: (3M)	M12-A12-RA0-M02-SCC-300N
PART NO. 品名: (5M)	M12-A12-RA0-M02-SCC-500N
Customized.定制化	

P1	Wirelist
1	brown
2	blue
3	white
4	green
5	pink
6	yellow
7	black
8	grey
9	red
10	violet
11	grey/pink
12	red/blue

E		TPU	Molded With Black TPU		G	8
D		Housing	A-Coding Male 12PIN,Black PA66		pcs	1
C		Terminal	Male Terminal ,Brass With Gold Plated		pcs	12
B		Screw	Screw M12 X1.0,Stainless steel		pcs	1
A		Cable	UL TYPE 26AWG X12C Black PVC Jacket		mm	L
编号 No.	料号 Materials No	品名 Name	材料规格 Description		单位 Unit	用量 Qty

						慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD				PART NO.: M12-A12-RA0-M02-SCC-XXXX		
NO SPECIFIED TOLERANCE			Cus' P/N:		Order No :		---		Drawing No.:		SP-02-M00XXX	
LINEAR	0.5-6	±0.1	DES.	JUN	DATE		UNITS	mm	THIRD ANGLE PROJECTION		PAGE  1 of 1	
	6~30	±0.2										
	>30	±2%	CHK.		DATE		SIZE	A4				
ANGLES	±1°		APP.		DATE		SCALE	X:X	文件等级: 外部公开			