


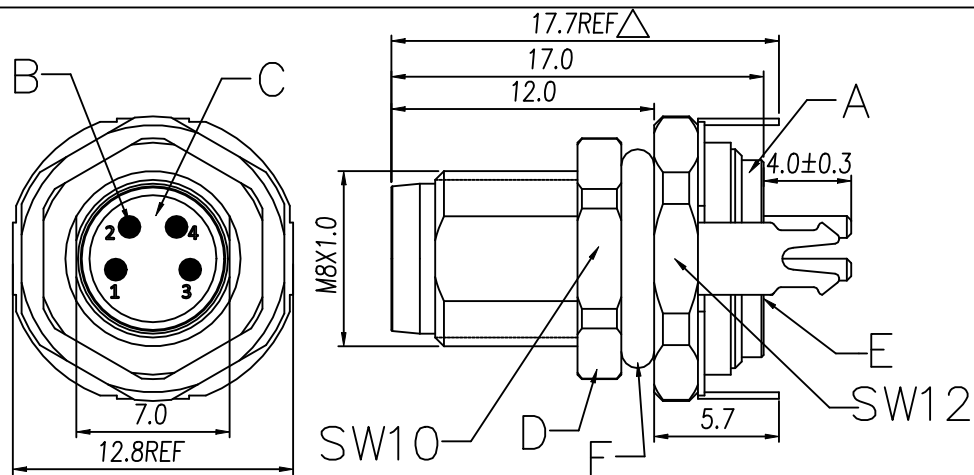

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	--	/		2023.05.23

IEC 技术参数		IEC61076-2-104	
IEC Technical Data			
工作温度	Operating temperatur [°C]		-25~+80
防护等级	IP Class (IN Locked condition)		IP67
额定电压	Rated Voltage [V]		
额定电流	Rated Current [A]		
导线截面积	Conductor cross section		
硬质/柔性导线	Solid/ flexible [mm²]		
接线范围	Wire Range		
单/多芯线	Solid/Stranded [AWG]		
材料			
绝缘材料	Insulation Material		PA 66
阻燃等级	Imflammability		UL94V-0
导体材料	Contactur Material		铜合金 Copper alloy
导体镀层	Contactive Coating	镀金 Gold Plated	
螺母/螺丝	Connector Nut/Screw	镀金 With Nickel Plated铜镀镍	
符合RoHS环保要求			

Contacts Pin 数	3Pin	4Pin	5Pin	6Pin	8Pin
Coding 编码	 A-Coding	 A-Coding	 B-Coding	 A-Coding	 A-Coding
Rated Current 额定电流	3A	3A	3A	1.5A	1.5A
Rated Voltage 额定电压	60V	60V	30V	30V	30V
Pin Size 导体直径	1.0mm	1.0mm	1.0mm	0.6mm	0.6mm
PART NO. 品名:	M08-A03-ST1-M01-BQ1	M08-A04-ST1-M01-BQ1	M08-B05-ST1-M01-BQ1	M08-A06-ST1-M01-BQ1	M08-A08-ST1-M01-BQ1
Customized. 定制化:					

PCB Layout:

