


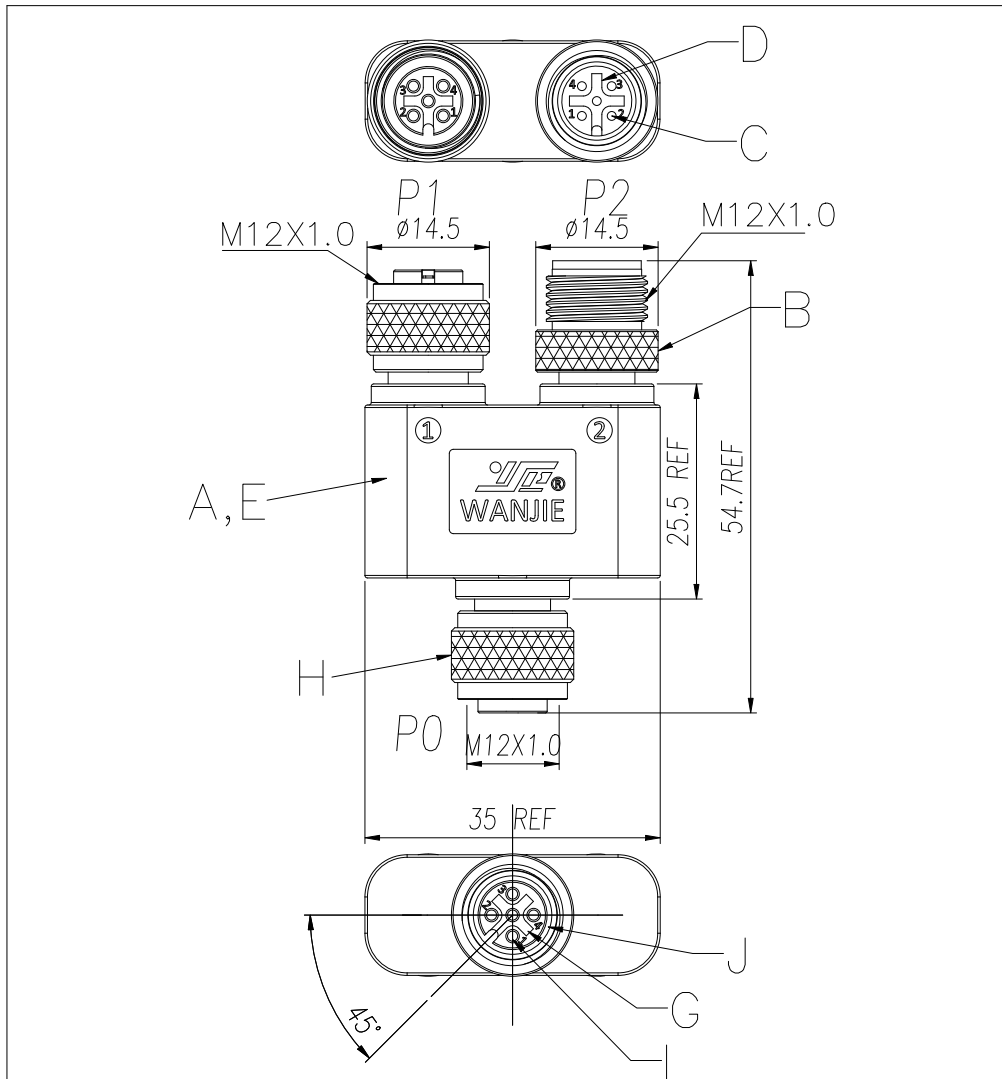

J		O-ring	O-ring,FKM Green	pcs	2
I		Terminal	Female Terminal ,Brass With Gold Plated	pcs	X
H		NUT	NUT M12 X1.0,Brass With Nickel Plated	pcs	2
G		Housing	A-Coding Female,Black PA66 UL94V-0	pcs	2
E		PUR	Molded With Black PUR	G	35
D		Housing	A-Coding Male,Black PA66 UL94V-0	pcs	1
C		Terminal	Male Terminal ,Brass With Gold Plated	pcs	X
B		Screw	Screw M12 X1.0,Brass With Nickel Plated	pcs	1
A		Wire	UL TYPE AWG 25mm(REF)	pcs	X
编号 No.	料号 Materials.No	品名 Name	材料规格 Description	单位 Unit	用量 Qty

M12-X XX-ST0-F02-BFM

Coding: A
Pin Number:03,04,05,

Contacts Pin 数	3Pin	4Pin	5Pin	8Pin
A-Coding				
Rated Current 额定电流	4A	4A	4A	2A
Rated Voltage 额定电压	250V	250V	60V	30V
Wire Range线范围	22AWG	22AWG	22AWG	24AWG
PART NO. 品名:	M12-A03-ST0-F02-BFM	M12-A04-ST0-F02-BFM	M12-A05-ST0-F02-BFM	M12-A08-ST0-F02-BFM
Customized.定制化				

						慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD				PART NO.: M12-AXX-ST0-F02-BFM		
NO SPECIFIED TOLERANCE			Cus' P/N:		Order No :		---		Drawing No.:		SP-02-M0XXXX	
LINEAR	0.5~6	±0.1	DES.	JUN	DATE		UNITS	mm	THIRD ANGLE PROJECTION 	PAGE		
	6~30	±0.2								1 of 2		
	>30	±2%	CHK.		DATE		SIZE	A4				
ANGLES	±1°		APP.		DATE		SCALE	X:X	文件等级:外部公开			

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
02-BFM		IEC 技术参数 IEC Technical Data		
		IEC61076-2-101		
		工作温度 Operating temperatur [°C]		-25~+80
		防护等级 IP Class (IN Locked condition)		IP67
		额定电压 Rated Voltage [V]		
		额定电流 Rated Current [A]		
		导线截面积Conductor cross section		
		硬质/柔性导线 Solid/ flexible [mm²]		
		接线范围 Wire Range		
		单/多芯线 Solid/Stranded [AWG]		
		材 料 Material		
		绝缘材料 Insulation Material		PA 66
		阻燃等级 Imflammability		UL94V-0
		导体材料 Contactor Material		铜合金 Copper alloy
		导体镀层 Contactive Coating		镀金 Gold Plated
螺母/螺丝Connector Nut/Screw		Brass With Nickel Plated铜镀镍		
符合RoHS环保要求				

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE

3Pin
Wirelist

P2		P0		P1
1	brown	1	brown	1
3	blue	3	blue	3
4	black	4	black	4

4Pin
Wirelist

P2		P0		P1
1	brown	1	brown	1
2	white	2	white	2
3	blue	3	blue	3
4	black	4	black	4

8Pin
Wirelist

P2		P0		P1
1	white	1	white	1
2	brown	2	brown	2
3	green	3	green	3
4	yellow	4	yellow	4
5	grey	5	grey	5
6	pink	6	pink	6
7	blue	7	blue	7
8	red	8	red	8

5Pin
Wirelist

P2		P0		P1
1	brown	1	brown	1
2	white	2	white	2
3	blue	3	blue	3
4	black	4	black	4
5	grey	5	grey	5

 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD							PART NO.: M12-AXX-ST0-F02-BFM				
NO SPECIFIED TOLERANCE			Cus' P/N:		Order No.:		---		Drawing No.: SP-02-M000XX		
LINEAR	0.5~6	±0.1	DES.	Jun	DATE			UNITS	mm	THIRD ANGLE PROJECTION 	PAGE
	6~30	±0.2	CHK.		DATE			SIZE	A4		2 of 2
	>30	±2%	APP.		DATE			SCALE	X:X		
ANGLES		±1°			DATE			SCALE	X:X	文件等级:外部公开	