



REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE


IEC 技术参数		IEC61076-2-101
IEC Technical Data		
工作温度	Operating temperatur [°C]	-25~+90
防护等级	IP Class (IN Locked condition)	IP67
额定电压	Rated Voltage [V]	250
额定电流	Rated Current [A]	4
导体截面积Conductor cross section		
硬质/柔性导线 Solid/ flexible [mm²]		
连接方式	Contacts Termination	
焊接PCB Soldering PCB		
材料 Material		
绝缘材料	Insulation Material	PA 66
阻燃等级	Imflammability	UL94V-0
导体材料	Contactora Material	铜合金 Copper alloy
导体镀层	Contactive Coating	镀金 Gold Plated
螺母/螺丝	Connector Nut/Screw	Brass With Nickel Plated铜镀镍
符合RoHS环保要求		

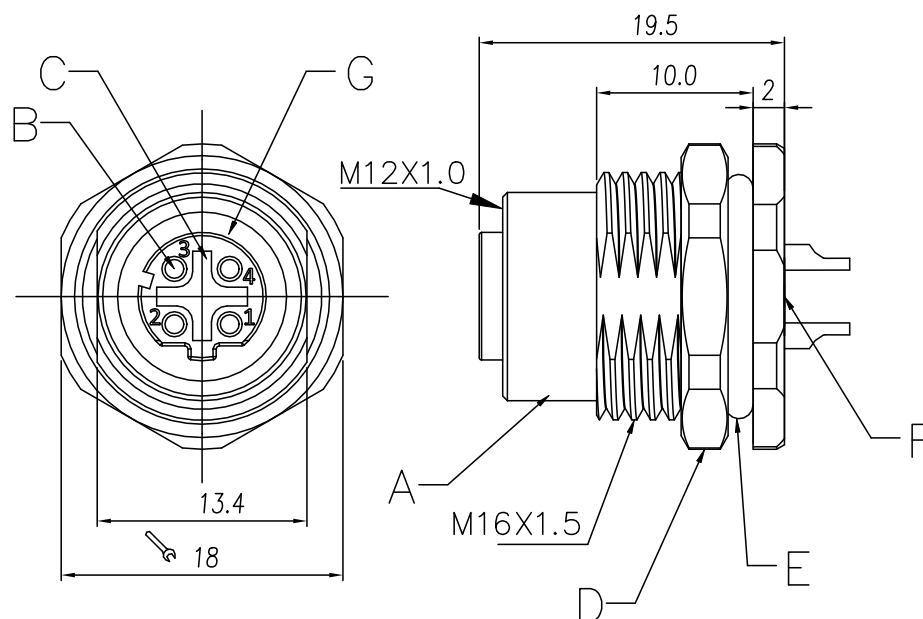

View from front
D-CODE 4PIN Female

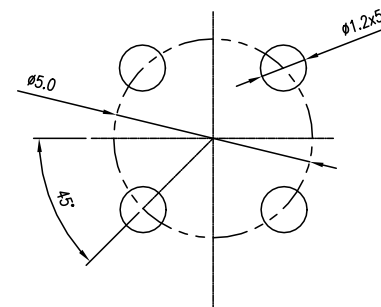

PCB Layout

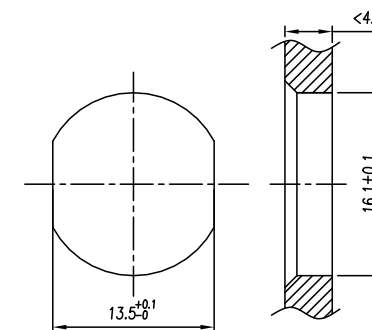

Panel cut-out

G		O-Ring	O-Ring FKM Green	pcs	1
F		Resin	Black epoxy resin for sealing	g	2
E		O-Ring	O-Ring FKM Black	pcs	1
D		Nut	Nut:M16X1.5,Brass With Nickel Plated	pcs	1
C		Housing	D-Coding Female 4PIN,BLACK PA66	pcs	1
B		Terminal	Female Terminal ,Brass With Gold Plated	pcs	4
A		Screw	Screw M12 X1.0,Brass With Nickel Plated	pcs	1
编号 No.	料号 Materials No	品名 Name	材料规格 Description	单位 Unit	用量 Qty

		慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD				PART NO.: M12-D04-ST0-F02-BQ1	
NO SPECIFIED TOLERANCE		Cus' P/N:		Order No :		Drawing No.: SP-02-M00XXX	
LINEAR	0.5~6	±0.1	DES.	JUN	DATE	UNITS	mm
	6~30	±0.2	CHK.		DATE	SIZE	A4
	>30	±2%	APP.		DATE	SCALE	X:X
ANGLES	±1°						文件等级:外部公开