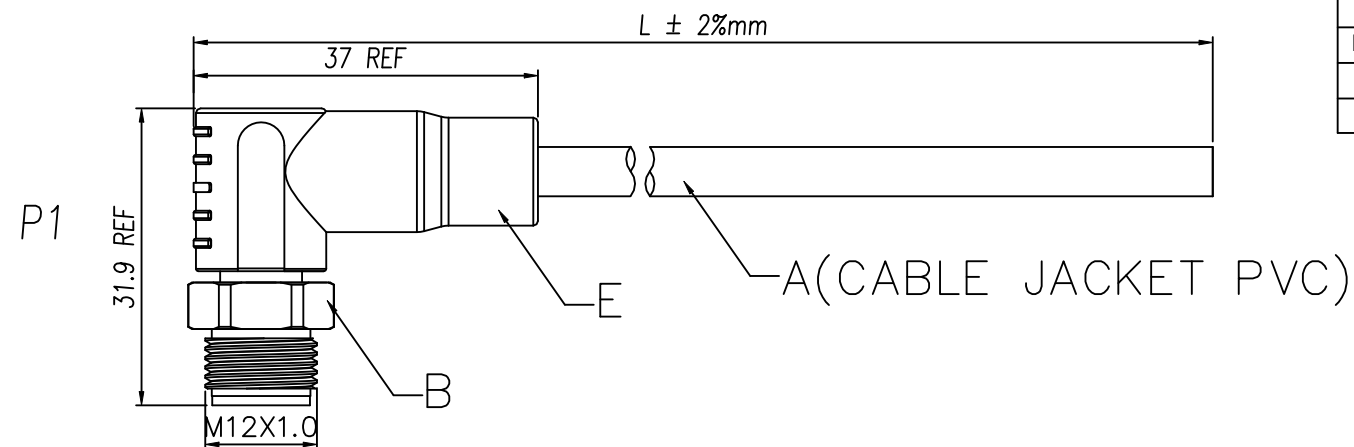


P1	Wirelist
1	brown
2	white
3	blue
4	black

Contacts Pin 数	4Pin
A-Coding	
Rated Current 额定电流	4A
Rated Voltage 额定电压	250V
Wire Range线范围	22AWG
PART NO. 品名: (1M)	M12-A04-RA0-M02-SCC-100N
PART NO. 品名: (2M)	M12-A04-RA0-M02-SCC-200N
PART NO. 品名: (3M)	M12-A04-RA0-M02-SCC-300N
PART NO. 品名: (5M)	M12-A04-RA0-M02-SCC-500N
Custiomized. 定制化	

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE

IEC 技术参数		IEC61076-2-101
IEC Technical Data		
工作温度	Operating temperatur [°C]	-25~+80
防护等级	IP Class (IN Locked condition)	IP67
额定电压	Rated Voltage [V]	250
额定电流	Rated Current [A]	4
导线截面积	Conductor cross section	0.34
硬质/柔性导线	Solid/ flexible [mm²]	
接线范围	Wire Range	22
单/多芯线	Solid/Stranded [AWG]	
材 料		
绝缘材料	Insulation Material	PA 66
阻燃等级	Imflammability	UL94V-0
导体材料	Contactur Material	铜合金 Copper alloy
导体镀层	Contactive Coating	镀金 Gold Plated
螺母/螺丝	Connector Nut/Screw	Brass With Nickel Plated铜镀镍
符合RoHS环保要求		

E		TPU	Molded With Black TPU		G	8
D		Housing	A-Coding Male 4PIN,Black PA66		pcs	1
C		Terminal	Male Terminal ,Brass With Gold Plated		pcs	4
B		Screw	Screw M12 X1.0,Stainless steel		pcs	1
A		Cable	UL TYPE 22AWG X4C Black PVC Jacket		mm	L
编号 No.	料号 Materials.No	品名 Name	材 料 规 格 Description		单位 Unit	用量 Qty

				慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD				PART NO.: M12-A04-RA0-M02-SCC-XXXX	
NO SPECIFIED TOLERANCE				Cus' P/N:		Order No : ---		Drawing No.: SP-02-M00XXX	
LINEAR	0.5-6	±0.1	DES.	JUN	DATE	UNITS	mm	THIRD ANGLE PROJECTION 	PAGE 1 of 1
	6~30	±0.2							
	>30	±2%	CHK.	DATE	SIZE	A4			
ANGLES	±1°		APP.	DATE	SCALE	X:X			