


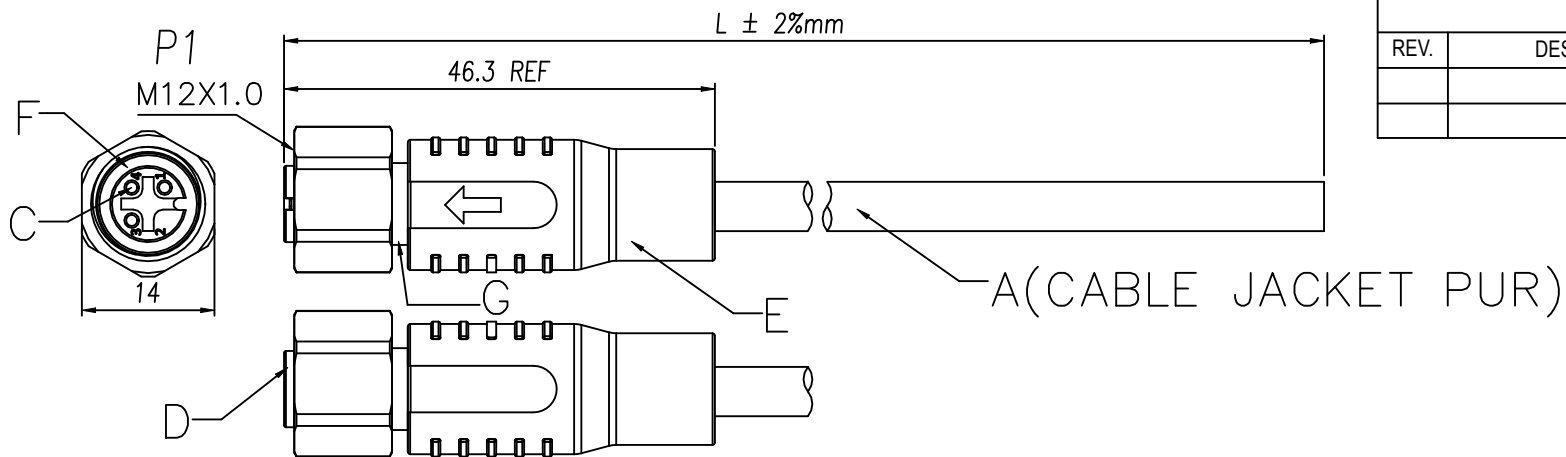

Contacts Pin 数	3Pin
A—Coding	
Rated Current 额定电流	4A
Rated Voltage 额定电压	250V
Wire Range线范围	22AWG
PART NO. 品名: (1M)	M12-A03-ST2-F02-SCR-100N
PART NO. 品名: (2M)	M12-A03-ST2-F02-SCR-200N
PART NO. 品名: (3M)	M12-A03-ST2-F02-SCR-300N
PART NO. 品名: (5M)	M12-A03-ST2-F02-SCR-500N
Customized.定制化	

P1	Wirelist
1	brown
3	blue
4	black
Shield	Braid

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE

IEC 技术参数		IEC61076-2-101
IEC Technical Data		
工作温度 Operating temperatur [°C]	-25~+80	
防护等级 IP Class (IN Locked condition)	IP67	
额定电压 Rated Voltage [V]	250	
额定电流 Rated Current [A]	4	
导线截面积Conductor cross section 硬质/柔性导线 Solid/ flexible [mm²]	0.34	
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	22	
材 料 Material		
绝缘材料 Insulation Material	PA 66	
阻燃等级 Imflammability	UL94V-0	
导体材料 Contactor Material	铜合金 Copper alloy	
导体镀层 Contactive Coating	镀金 Gold Plated	
螺母/螺丝 Connector Nut/Screw	Brass With Nickel Plated铜镀镍	
符合RoHS环保要求		

G		Pipe	Shield Pipe,Brass With Nickel Plated	pcs	1
F		O-ring	O-ring,FKM Green	pcs	1
E		TPU	Molded With Black TPU	G	8
D		Housing	A-Coding Female 3PIN,Black PA66	pcs	1
C		Terminal	Female Terminal ,Brass With Gold Plated	pcs	3
B		Screw	Screw M12 X1.0,Stainless steel	pcs	1
A		Cable	UL TYPE 22AWG X3C+AL+Braid Black PUR Jacket	mm	L
编号 No.	料号 Materials.No	品名 Name	材料规格 Description	单位 Unit	用量 Qty

 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: M12-A03-ST2-F02-SCR- <u>XXXX</u>						
NO. SPECIFIED TOLERANCE			Cus' P/N:		Order No.:		---		Drawing No.:		SP-02-M0XXXX	
LINEAR	0.5-6	±0.1	DES.	JUN	DATE	UNITS	mm		THIRD ANGLE PROJECTION 		PAGE	
	6-30	±0.2	CHK.		DATE	SIZE	A4				1 of 1	
	>30	±2%	APP.		DATE	SCALE	X:X					
ANGLES	±1°		APP.		DATE	SCALE	X:X		文件等级：外部公开			