


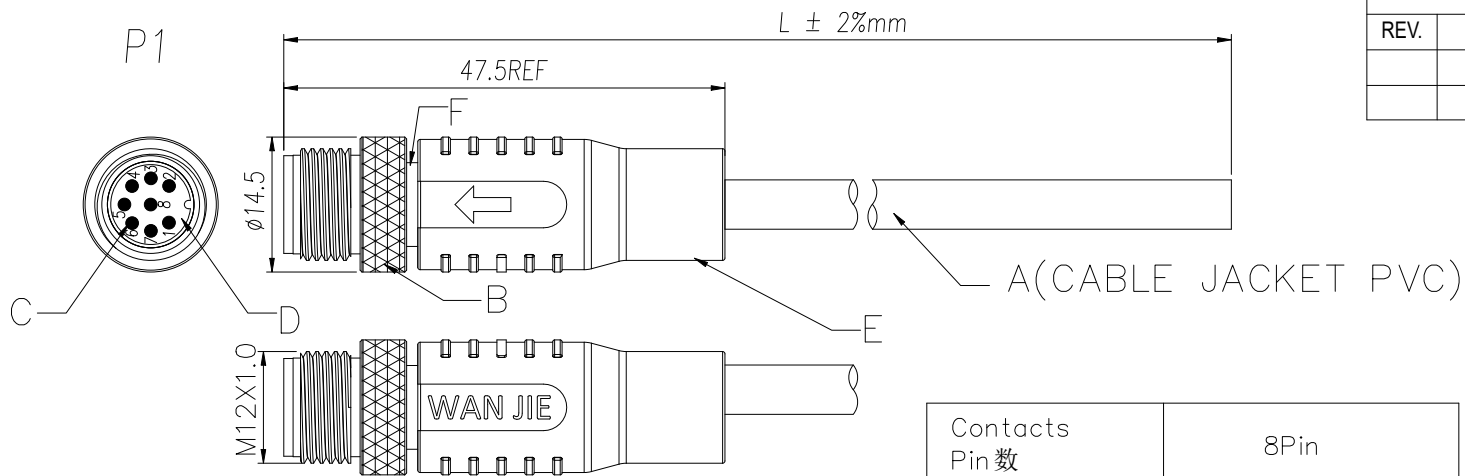

P1	Wirelist
1	white
2	brown
3	green
4	yellow
5	grey
6	pink
7	blue
8	red
Shield	Braid

Contacts Pin 数	8Pin
A-Coding	
Rated Current 额定电流	2A
Rated Voltage 额定电压	30V
Wire Range线范围	24AWG
PART NO. 品名: (1m)	M12-A08-ST2-M02-BCC-100
PART NO. 品名: (2m)	M12-A08-ST2-M02-BCC-200
PART NO. 品名: (3m)	M12-A08-ST2-M02-BCC-300
PART NO. 品名: (5m)	M12-A08-ST2-M02-BCC-500
Customized. 定制化	M12-A08-ST2-M02-BCC-XXX

Cable Length L (电线成品长度):
050=0.5m;100=1.0m; 10M=10m;

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE

IEC 技术参数		IEC61076-2-101
IEC Technical Data		
工作温度	Operating temperatur [°C]	-40~+80
防护等级	IP Class (IN Locked condition)	IP67
额定电压	Rated Voltage [V]	30
额定电流	Rated Current [A]	2
导线截面积	Conductor cross section	0.25
硬质/柔性导线	Solid/ flexible [mm²]	
接线范围	Wire Range	24
单/多芯线	Solid/Stranded [AWG]	
材 料 Material		
绝缘材料	Insulation Material	PA 66
阻燃等级	Imflammability	UL94V-0
导体材料	Contactur Material	铜合金 Copper alloy
导体镀层	Contactive Coating	镀金 Gold Plated
螺母/螺丝	Connector Nut/Screw	Copper Alloy With Nickel Plated铜镀镍
符合RoHS环保要求		

F	Pipe	Shield Pipe,Copper Alloy With Nickel Plated	pcs	1	
E	PUR	Molded With Black PUR	G	8	
D	Housing	A-Coding Male 8PIN,Black PA66 UL94V-0	pcs	1	
C	Terminal	Male Terminal ,Copper Alloy With Gold Plated	pcs	8	
B	Screw	Screw M12 X1.0,Copper Alloy With Nickel Plated	pcs	1	
A	Cable	UL TYPE 24AWG X8C+AL+Braid Black PVC Jacket	mm	X	
编号 No.	料号 Materials.No	品名 Name	材 料 规 格 Description	单位 Unit	用量 Qty

						慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD				PART NO.: M12-A08-ST2-M02-BCC- <u>XXX</u>					
NO SPECIFIED TOLERANCE						Cus' P/N:		Order No :		---		Drawing No.:		SP-02-M00XXX	
LINEAR	0.5~6	±0.1	DES.	JUN	DATE	UNITS	mm	THIRD ANGLE PROJECTION 		PAGE 1 of 1					
	6~30	±0.2													
	>30	±2%	CHK.	DATE	SIZE	A4									
ANGLES	±1°		APP.		DATE	SCALE	X:X	文件等级 : 外部公开							