


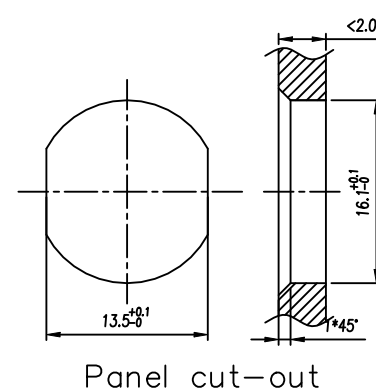

IEC 技术参数		IEC61076-2-101
IEC Technical Data		
工作温度	Operating temperatur [°C]	-25~+80
防护等级	IP Class (IN Locked condition)	IP67
额定电压	Rated Voltage [V]	_____
额定电流	Rated Current [A]	_____
导线截面积	Conductor cross section	
硬质/柔性导线	Solid/ flexible [mm²]	
接线范围	Wire Range	
单/多芯线	Solid/Stranded [AWG]	
材料		
绝缘材料	Insulation Material	PA 66
阻燃等级	Imflammability	UL94V-0
导体材料	Contactur Material	铜合金 Copper alloy
导体镀层	Contactive Coating	镀金 Gold Plated
螺母/螺丝	Connector Nut/Screw	Brass With Nickel Plated铜镀镍
符合RoHS环保要求		

PCB Layout:

Pin OD: $\varnothing 1.0$ (3P/4P/5P)

Pin OD: $\varnothing 0.8$ (8P)

Pin OD: $\varnothing 0.6$ (12P)

Pin OD: $\varnothing 0.6$ (17P)

 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD							PART NO.: M12-AXX-ST0-F01-BH1		
NO SPECIFIED TOLERANCE			Cus' P/N:	Order No. : ---			Drawing No.:	SP-02-M00XXX	
LINEAR	0.5~6	±0.1	DES.	JUN	DATE	UNITS	mm	THIRD ANGLE PROJECTION	PAGE
	6~30	±0.2	CHK.		DATE	SIZE	A4		1 of 1
	>30	±2%							
ANGLES	±1°		APP.		DATE	SCALE	X:X	文件等级: 外部公开	