
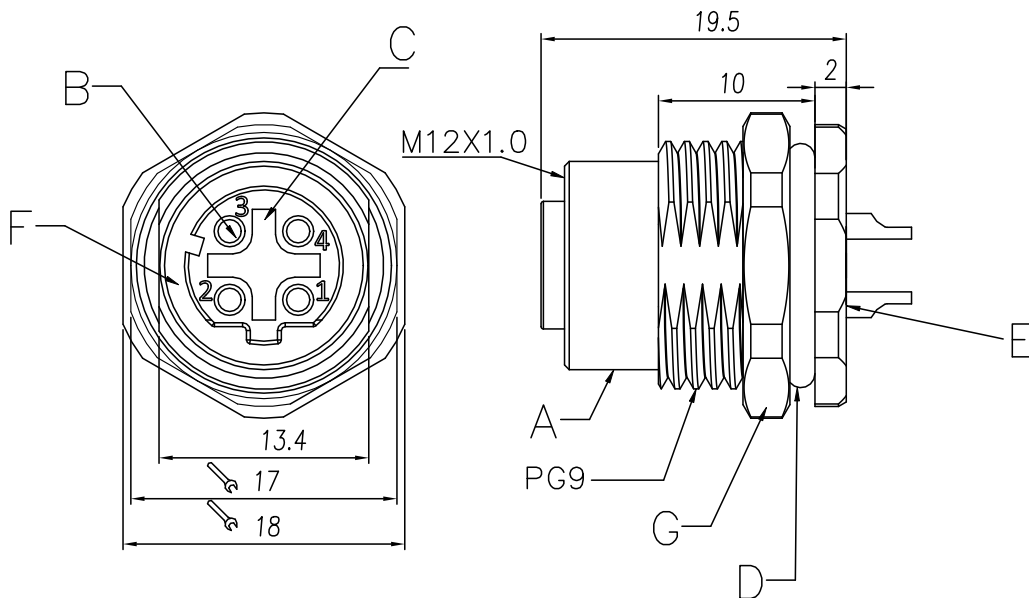




Contacts Pin 数	4Pin
D-Coding	
Rated Current 额定电流	4A
Rated Voltage 额定电压	250V
Wire Range线范围	22AWG
PART NO.品名:	M12-D04-ST0-F02-BQ2

G		NUT	NUT PG9,Brass With Nickel Plated	pcs	1
F		O-Ring	O-Ring FKM Green	pcs	1
E		Resin	Black epoxy resin for sealing	g	2
D		O-Ring	O-Ring FKM Black	pcs	1
C		Housing	B-Coding Female,Black PA66	pcs	1
B		Terminal	Female Terminal ,Brass With Gold Plated	pcs	4
A		Screw	Screw M12 X1.0/PG9,Brass With Nickel Plated	pcs	1
编号 No.	料号 Materials.No	品名 Name	材 料 规 格 Description	单位 Unit	用量 Qty

 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD							PART NO.: M12-D04-ST0-F02-BQ2											
NO SPECIFIED TOLERANCE			Cus' P/N:		Order No :		---		Drawing No.:		SP-02-M000XX							
LINEAR	0.5-6	±0.1	DES.	JUN	DATE		UNITS	mm	THIRD ANGLE PROJECTION			PAGE 1 of 1						
	6~30	±0.2																
	>30	±2%																
ANGLES		±1°	APP.		DATE		SCALE		X:X				文件等级:外部公开					

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE

cut-out

IEC 技术参数 IEC Technical Data		IEC61076-2-101
工作温度 Operating temperatur [°C]	-25~+80	
防护等级 IP Class (IN Locked condition)	IP67	
额定电压 Rated Voltage [V]		
额定电流 Rated Current [A]		
导线截面积Conductor cross section		
硬质/柔性导线 Solid/ flexible [mm²]		
接线范围 Wire Range		
单/多芯线 Solid/Stranded [AWG]		
材料 Material		
绝缘材料 Insulation Material	PA 66	
阻燃等级 Imflammability	UL94V-0	
导体材料 Contactor Material	铜合金 Copper alloy	
导体镀层 Contactive Coating	镀金 Gold Plated	
螺母/螺丝 Connector Nut/Screw	Brass With Nickel Plated 铜镀镍	
符合RoHS环保要求		