


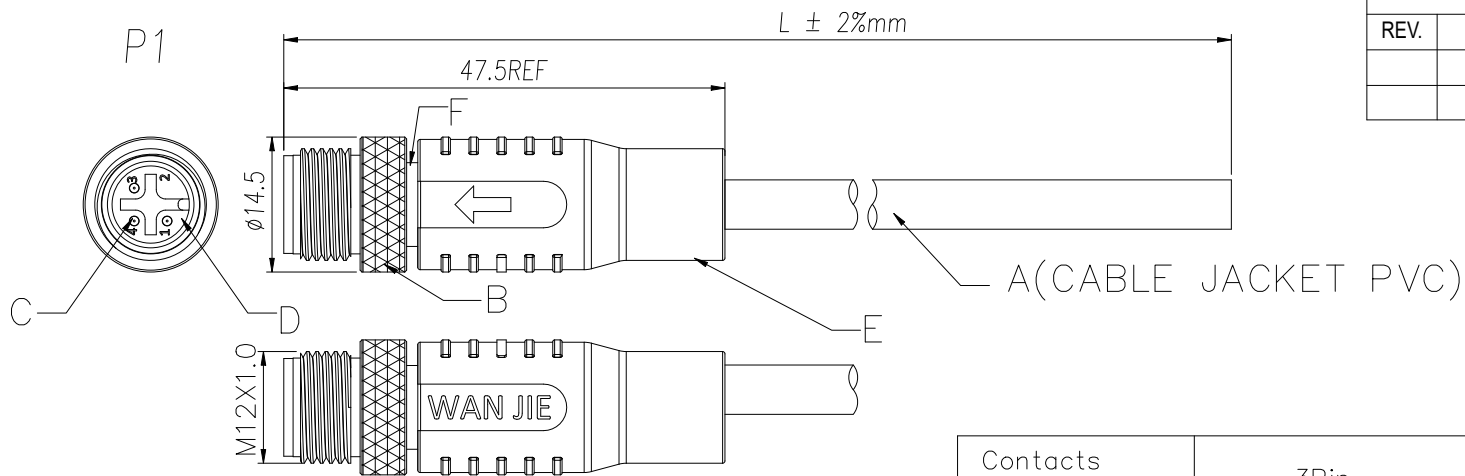

P1	Wirelist
1	brown
3	blue
4	black
Shield	Braid

Contacts Pin 数	3Pin
A—Coding	
Rated Current 额定电流	4A
Rated Voltage 额定电压	250V
Wire Range线范围	22AWG
PART NO. 品名: (1m)	M12-A03-ST2-M02-BCC-100
PART NO. 品名: (2m)	M12-A03-ST2-M02-BCC-200
PART NO. 品名: (3m)	M12-A03-ST2-M02-BCC-300
PART NO. 品名: (5m)	M12-A03-ST2-M02-BCC-500
Customized. 定制化:	M12-A03-ST2-M02-BCC-XXX

Cable Length L (电线成品长度):
050=0.5m;100=1.0m; 10M=10m;

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE

IEC 技术参数		IEC61076-2-101
IEC Technical Data		
工作温度 Operating temperatur [°C]		-40~+80
防护等级 IP Class (IN Locked condition)		IP67
额定电压 Rated Voltage [V]		250
额定电流 Rated Current [A]		4
导线截面积Conductor cross section 硬质/柔性导线 Solid/ flexible [mm²]		0.34
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]		22
材 料 Material		
绝缘材料 Insulation Material		PA 66
阻燃等级 Imflammability		UL94V-0
导体材料 Contactor Material		铜合金 Copper alloy
导体镀层 Contactive Coating		镀金 Gold Plated
螺母/螺丝 Connector Nut/Screw		Copper Alloy With Nickel Plated铜镀镍
符合RoHS环保要求		

F		Pipe	Shield Pipe,Copper Alloy With Nickel Plated	pcs	1
E		PUR	Molded With Black PUR	G	8
D		Housing	A—Coding Male 3PIN,Black PA66 UL94V-0	pcs	1
C		Terminal	Male Terminal ,Copper Alloy With Gold Plated	pcs	3
B		Screw	Screw M12 X1.0,Copper Alloy With Nickel Plated	pcs	1
A		Cable	UL 2464 22AWG X3C+AL+Braid Black PVC Jacket	mm	X
编号 No.	料号 Materials.No	品名 Name	材料规格 Description	单位 Unit	用量 Qty

				慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD				PART NO.: M12-A03-ST2-M02-BCC- <u>XXX</u>					
NO SPECIFIED TOLERANCE				Cus' P/N:		Order No :		---		Drawing No.:		SP-02-M00XXX	
LINEAR	0.5-6	±0.1	DES.	JUN	DATE	UNITS	mm	THIRD ANGLE PROJECTION 		PAGE 1 of 1			
	6-30	±0.2	CHK.	DATE	DATE	SIZE	A4						
	>30	±2%											
ANGLES	±1°		APP.			DATE	SCALE	X:X	文件等级:外部公开				