



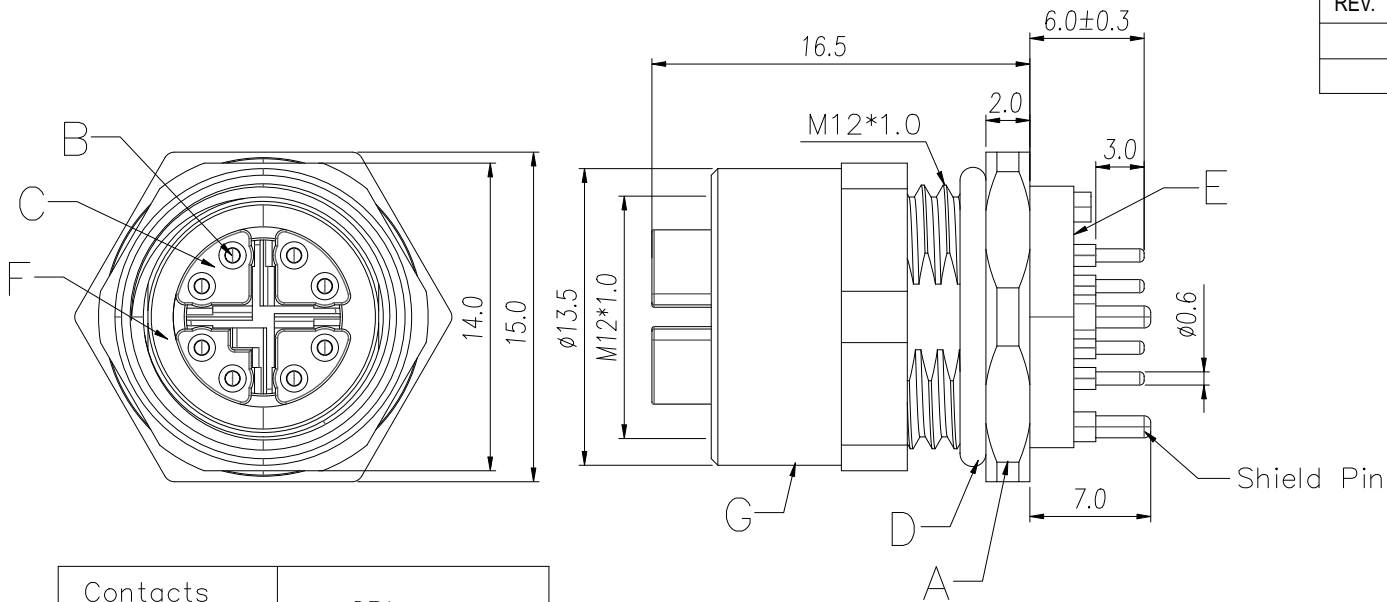


Contacts Pin 数	8Pin
X-Coding	
Rated Current 额定电流	0.5A
Rated Voltage 额定电压	48V(AC),60V(DC)
Pin Size导体直径	0.6mm
PART NO. 品名:	M12-X08-ST1-F01-BQ3

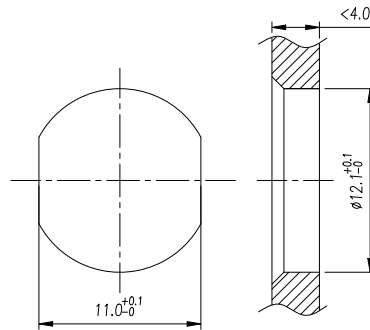

Panel cut-out

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
d Pin		IEC 技术参数 IEC Technical Data IEC61076-2-109		
		工作温度 Operating temperatur [°C]		-40~+80
		防护等级 IP Class (IN Locked condition)		IP67
		额定电压 Rated Voltage [V]		48V(AC),60V(DC)
		额定电流 Rated Current [A]		0.5
		导线截面积Conductor cross section		
		硬质/柔性导线 Solid/ flexible [mm²]		
		接线范围 Wire Range		
		单/多芯线 Solid/Stranded [AWG]		
		材 料 Material		
		绝缘材料 Insulation Material		PA 66
		阻燃等级 Imflammability		UL94V-0
		导体材料 Contactor Material		铜合金 Copper alloy
		导体镀层 Contactive Coating		镀金 Gold Plated
		螺母/螺丝Connector Nut/Screw		Brass With Nickel Plated铜镀镍
符合RoHS环保要求				

PCB Layout:

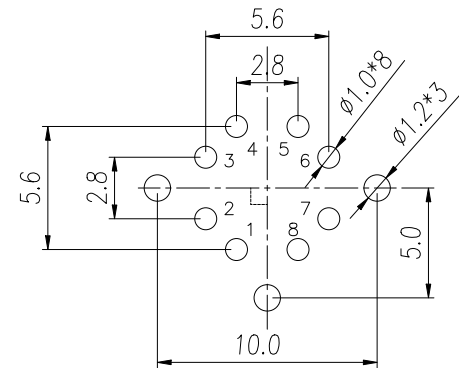

G		NUT	NUT,Brass With Nickel Plated	pcs	1
F		O-Ring	O-Ring FKM Black	pcs	1
E		Resin	Black epoxy resin for sealing	g	2
D		O-Ring	O-Ring FKM Black	pcs	1
C		Housing	M12 X-Coding 8Pin Female,Black PA66,UL94V-0	pcs	1
B		Terminal	Female Terminal ,Brass With Gold Plated	pcs	8
A		Screw	Screw M12 X1.0,Brass With Nickel Plated	pcs	1
编号 No.	料号 Materials.No	品名 Name	材料规格 Description	单位 Unit	用量 Qty

		慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD			PART NO.: M12-X08-ST1-F01-BQ3	
NO SPECIFIED TOLERANCE		Cus' P/N:		Order No :	---	Drawing No.: SP-02-M000XX
LINEAR	0.5~6	±0.1	DES.	JUN	DATE	UNITS mm
	6~30	±0.2	CHK.		DATE	SIZE A4
	>30	±2%	APP.		DATE	SCALE X:X
ANGLES	±1°		APP.		DATE	文件等级:外部公开