


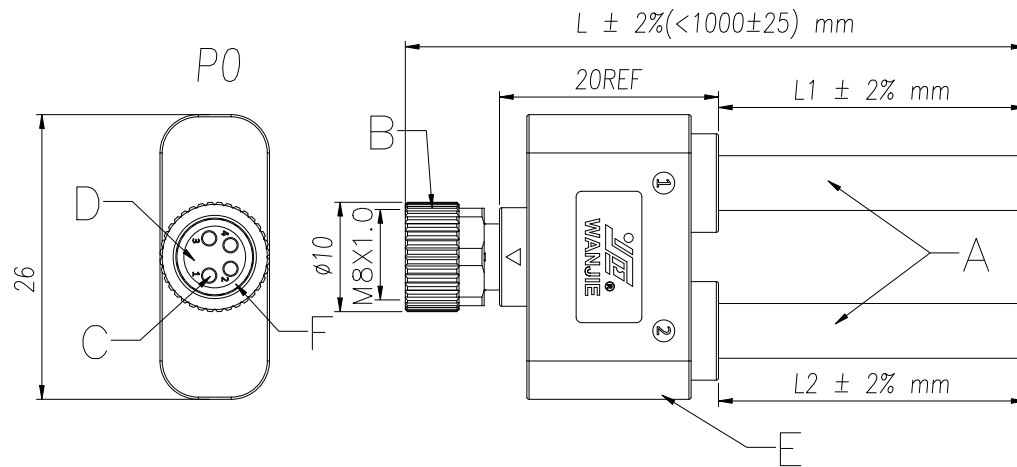

P1

P2

Contacts Pin 数	3Pin	4Pin	5Pin
Coding 编码	 A-Coding	 A-Coding	 B-Coding
Rated Current 额定电流	3A	3A	3A
Rated Voltage 额定电压	60V	60V	30V
Wire Range 线范围	24AWG	24AWG	24AWG
PART NO. 品名 (1.0M):	M08-A03-ST0-F02-BVC-100	M08-A04-ST0-F02-BVC-100	M08-B05-ST0-F02-BVC-100
PART NO. 品名 (2.0M):	M08-A03-ST0-F02-BVC-200	M08-A04-ST0-F02-BVC-200	M08-B05-ST0-F02-BVC-200
PART NO. 品名 (3.0M):	M08-A03-ST0-F02-BVC-300	M08-A04-ST0-F02-BVC-300	M08-B05-ST0-F02-BVC-300
PART NO. 品名 (5.0M):	M08-A03-ST0-F02-BVC-500	M08-A04-ST0-F02-BVC-500	M08-B05-ST0-F02-BVC-500
Customized. 定制化:			


F		O-Ring	O-Ring FKM Orange	pcs	1
E		PUR	Molded With Black PUR	G	5
D		Housing	Housing Female ,Black PA66	pcs	1
C		Terminal	Female Terminal ,Brass With Gold Plated	pcs	X
B		Screw	Screw M8X1.0,Brass With Nickel Plated	pcs	1
A		Cable	UL AWM 24AWG Black PVC Jacket	mm	L
编号 No.	料号 Materials.No	品名 Name	材 料 规 格 Description	单位 Unit	用量 Qty

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	--	/		2021.08.18

IEC 技术参数 IEC Technical Data		IEC61076-2-104
工作温度 Operating temperatur [°C]	-25~+80	
防护等级 IP Class (IN Locked condition)	IP67	
额定电压 Rated Voltage [V]	/	
额定电流 Rated Current [A]	/	
导线截面积 Conductor cross section 硬质/柔性导线 Solid/ flexible [mm²]	/	
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]	/	
材 料 Material		
绝缘材料 Insulation Material	PA 66	
阻燃等级 Imflammability	UL94V-0	
导体材料 Contactor Material	铜合金 Copper alloy	
导体镀层 Contactive Coating	镀金 Gold Plated	
螺母/螺丝 Connector Nut/Screw	Brass With Nickel Plated 铜镀镍	
符合RoHS环保要求		

M08-X XX-ST0-F02-BVC-XXX
Coding: A, B
Pin Number: 03, 04, 05,
Cable Length L:
050=0.5m; 100=1.0m; 10M=10m;

			慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD					PART NO.: M08-XXX-ST0-F02-BVC-XXX		
NO SPECIFIED TOLERANCE			Cus' P/N:		Order No :		---		Drawing No.:	SP-02-M000XX
LINEAR	0.5~6	±0.1	DES.	JUN	DATE	UNITS	mm	THIRD ANGLE PROJECTION 	PAGE 1 of 2	
	6~30	±0.2								
	>30	±2%	CHK.		DATE	SIZE	A4			
ANGLES	±1°		APP.		DATE	SCALE	X:X	文件等级: 外部公开		

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	--	/		2021.08.18

3Pin

Wirelist

P1	P0	P2
1 ————— brown	1 ————— brown	1
2 ————— blue	2 ————— blue	2
3 ————— black	3 ————— black	3
4 ————— black	4 ————— black	4

4Pin

Wirelist

P1	P0	P2
1 ————— brown	1 ————— brown	1
2 ————— white	2 ————— white	2
3 ————— blue	3 ————— blue	3
4 ————— black	4 ————— black	4

5Pin

Wirelist

P1	P0	P2
1 ————— brown	1 ————— brown	1
2 ————— white	2 ————— white	2
3 ————— blue	3 ————— blue	3
4 ————— black	4 ————— black	4
5 ————— grey	5 ————— grey	5

 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD										PART NO.: M08-XXX-ST0-F02-BVC-XXX	
NO SPECIFIED TOLERANCE			Cus' P/N:		Order No :		---		Drawing No.:		SP-02-M000XX
LINEAR	0.5~6	±0.1	DES.	Jun	DATE		UNITS	mm	THIRD ANGLE PROJECTION 		PAGE
	6~30	±0.2	CHK.		DATE		SIZE	A4			2 of 2
	>30	±2%	APP.		DATE		SCALE	X:X	文件等级: 外部公开		