
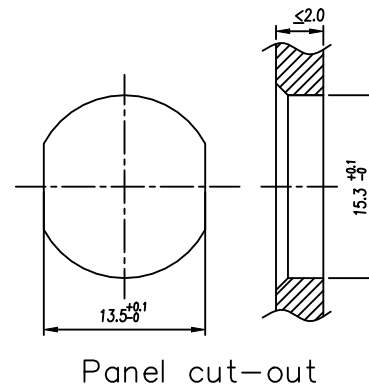
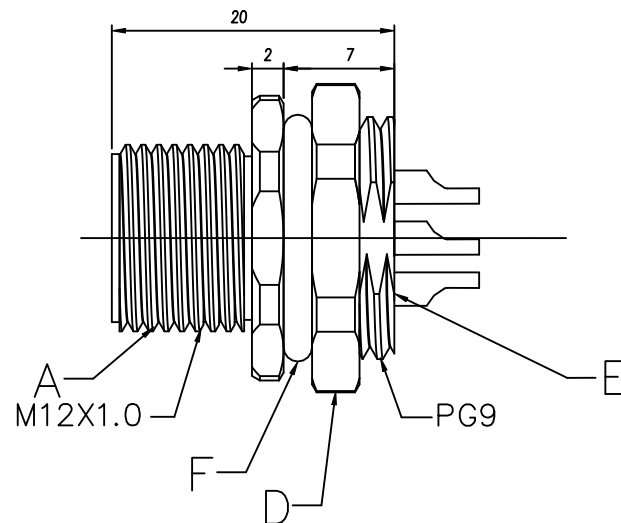


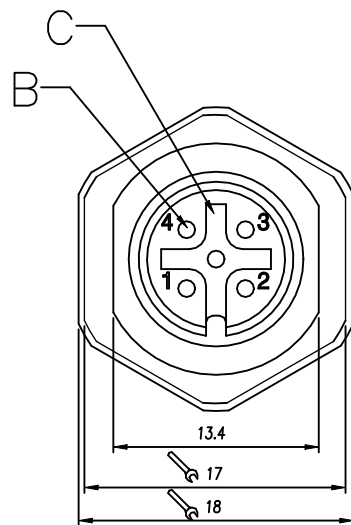

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

IEC 技术参数		IEC61076-2-101
IEC Technical Data		
工作温度 Operating temperatur [°C]	-25~+80	
防护等级 IP Class (IN Locked condition)	IP67	
额定电压 Rated Voltage [V]		
额定电流 Rated Current [A]		
导线截面积Conductor cross section 硬质/柔性导线 Solid/ flexible [mm²]		
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]		
材 料 Material		
绝缘材料 Insulation Material	PA 66	
阻燃等级 Imflammability	UL94V-0	
导体材料 Contactor Material	铜合金 Copper alloy	
导体镀层 Contactive Coating	镀金 Gold Plated	
螺母/螺丝 Connector Nut/Screw	Brass With Nickel Plated铜镀镍	
符合RoHS环保要求		

Contacts Pin 数	3Pin	4Pin	5Pin	8Pin	12Pin	17Pin
A-Coding						
Rated Current 额定电流	4A	4A	4A	2A	1.5A	1.5A
Rated Voltage 额定电压	250V	250V	60V	30V	30V	30V
Wire Range线范围	22AWG	22AWG	22AWG	24AWG	26AWG	26AWG
PART NO. 品名:	M12-A03-ST0-M02-BH2	M12-A04-ST0-M02-BH2	M12-A05-ST0-M02-BH2	M12-A08-ST0-M02-BH2	M12-A12-ST0-M02-BH2	M12-A17-ST0-M02-BH2
Customized定制化:						

F		O-Ring	O-Ring FKM Black	pcs	1
E		Resin	Black epoxy resin for sealing	g	2
D		Nut	Nut:PG9,Brass With Nickel Plated	pcs	1
C		Housing	A-Coding Male 5PIN,Black PA66	pcs	1
B		Terminal	Male Terminal ,Brass With Gold Plated	pcs	X
A		Screw	Screw M12 X1.0,Brass With Nickel Plated	pcs	1
编号 No.	料号 Materials.No	品名 Name	材 料 规 格 Description	单位 Unit	用量 Qty

 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD							PART NO.: M12- <u>AXX</u> -ST0-M02-BH2			
NO SPECIFIED TOLERANCE			Cus' P/N:	Order No :		---		Drawing No.:	SP-02-M00XXX	
LINEAR	0.5~6	±0.1	DES.	Jun	DATE	UNITS	mm	THIRD ANGLE PROJECTION	PAGE  1 of 1	
	6~30	±0.2								
	>30	±2%								
ANGLES	±1°		APP.		DATE	SCALE	X:X	文件等级: 外部公开		