
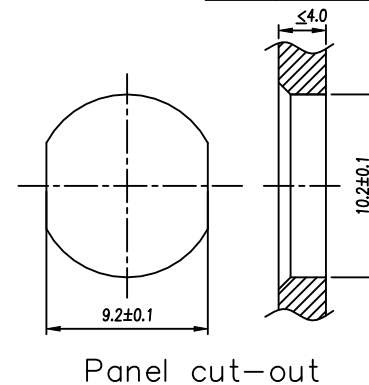


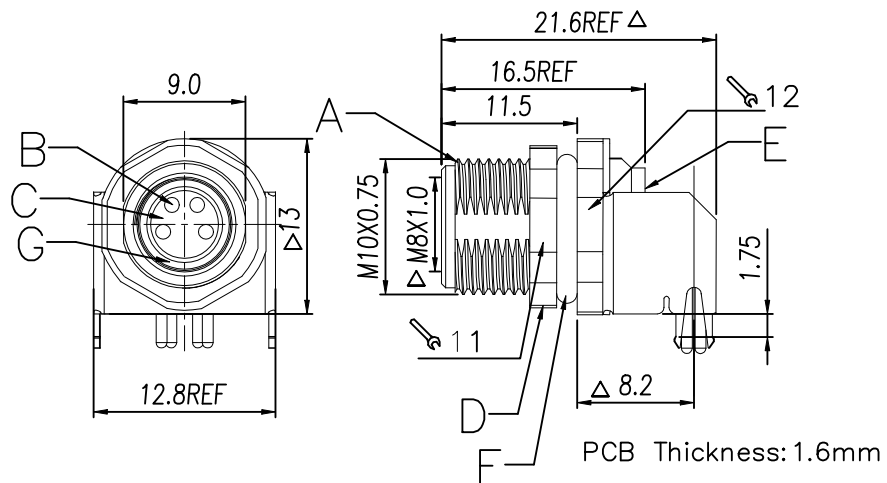


REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	--	—		2020.11.18
V1	△ Changed SPEC	—		2023.05.17

IEC 技术参数		IEC61076-2-104	
IEC Technical Data			
工作温度	Operating temperatur [°C]	-40~+105	
防护等级	IP Class (IN Locked condition)	IP67	
额定电压	Rated Voltage [V]	/	
额定电流	Rated Current [A]	/	
导线截面积	Conductor cross section	/	
硬质/柔性导线	Solid/ flexible [mm²]	/	
接线范围	Wire Range	PCB	
单/多芯线	Solid/Stranded [AWG]		
材料 Material			
绝缘材料	Insulation Material	PA 66	
阻燃等级	Imflammability	UL94V-0	
导体材料	Contactur Material	铜合金 Copper alloy	
导体镀层	Contactive Coating	镀金 Gold Plated	
螺母/螺丝	Connector Nut/Screw	Brass With Nickel Plated铜镀镍	
符合RoHS环保要求			

Contacts Pin 数	3Pin	4Pin	5Pin	6Pin
Coding 编码	A-Coding	A-Coding	B-Coding	A-Coding
Rated Current 额定电流	3A	3A	3A	1.5A
Rated Voltage 额定电压	60V	60V	30V	30V
Pin Size 导体直径	1.0mm	1.0mm	1.0mm	0.6mm
PART NO. 品名:	M08-A03-RA1-F01-BQ3	M08-A04-RA1-F01-BQ3	M08-B05-RA1-F01-BQ3	M08-A06-RA1-F01-BQ3
Customized. 定制化:				

PCB Layout:

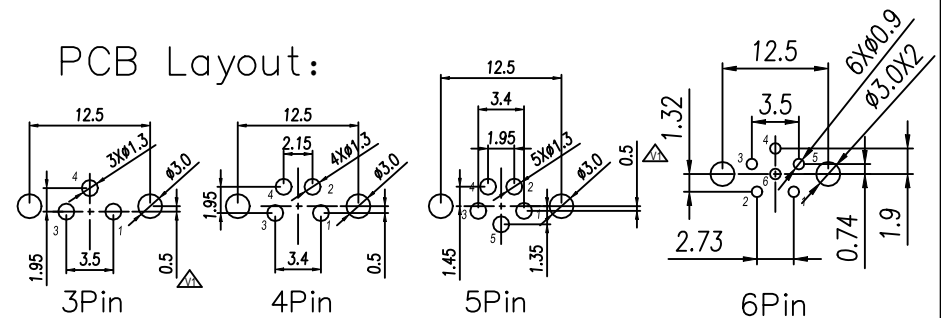

G		O-Ring	O-Ring FKM Orange	pcs	1
F		O-Ring	O-Ring FKM Black	pcs	1
E		Resin	Black epoxy resin for sealing	g	2
D		Nut	Nut:M10X0.75,Brass With Nickel Plated	pcs	1
C		Housing	Housing Female ,Black PA66	pcs	1
B		Terminal	Female Terminal ,Brass With Gold Plated	pcs	X
A		Screw	Screw M8X1.0/M10X0.75,Brass With Nickel Plated	pcs	1
编号 No.	料号 Materials.No	品名 Name	材 料 规 格 Description	单 位 Unit	用 量 Qty

							慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD			PART NO.: M08-AXX-RA1-F01-BQ3			
NO SPECIFIED TOLERANCE				Cus' P/N:		Order No.:		---		Drawing No.:		SP-02-M000XX	
LINEAR	0.5-6	±0.1	DES.	JUN	DATE	UNITS	mm	THIRD ANGLE PROJECTION		PAGE			
	6~30	±0.2											
	>30	±2%											
CHK.				DATE		SIZE	A4			1 of 1			
ANGLES		±1°		APP.			DATE		SCALE	X:X	文件等级:外部公开		