


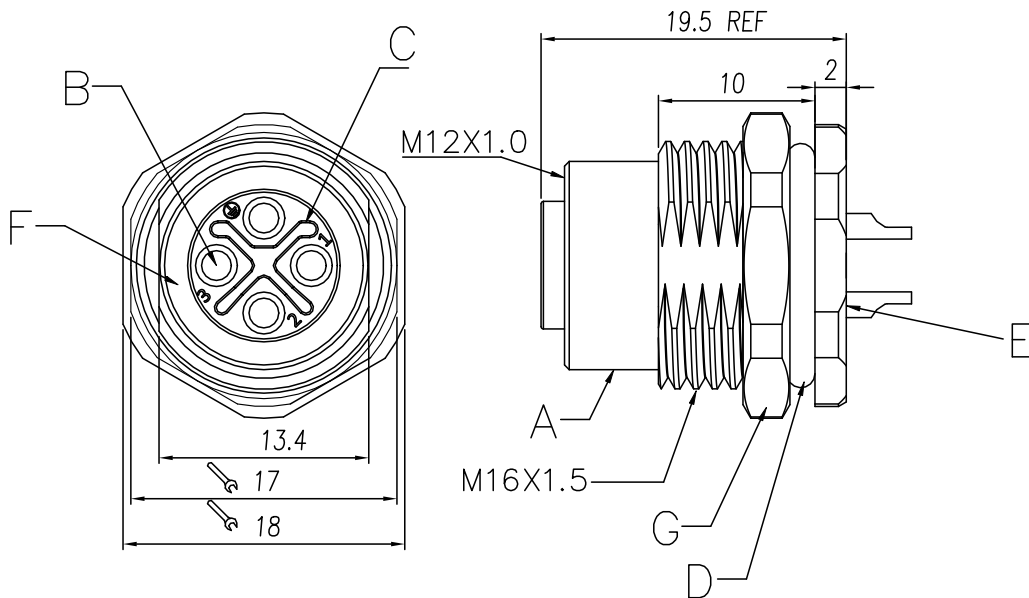


Contacts Pin 数	3Pin	4Pin
S-Coding		
Rated Current 额定电流	12A	12A
Rated Voltage 额定电压	630V	630V
Wire Range线范围	16AWG	16AWG
PART NO.品名:	M12-S03-ST0-F02-BQ1	M12-S04-ST0-F02-BQ1
Customized定制化:		

G		NUT	NUT,Brass With Nickel Plated	pcs	1
F		O-Ring	O-Ring FKM Green	pcs	1
E		Resin	Black epoxy resin for sealing	g	2
D		O-Ring	O-Ring FKM Black	pcs	1
C		Housing	S-Coding Female,Black PA66	pcs	1
B		Terminal	Female Terminal ,Brass With Gold Plated	pcs	X
A		Screw	Screw M12 X1.0,Brass With Nickel Plated	pcs	1
编号 No.	料号 Materials.No	品名 Name	材料规格 Description	单位 Unit	用量 Qty

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE

IEC 技术参数		IEC61076-2-111
IEC Technical Data		
工作温度	Operating temperatur [°C]	-25~+105
防护等级	IP Class (IN Locked condition)	IP67
额定电压	Rated Voltage [V]	_____
额定电流	Rated Current [A]	_____
导线截面积	Conductor cross section	_____
硬质/柔性导线	Solid/ flexible [mm²]	_____
接线范围	Wire Range	_____
单/多芯线	Solid/Stranded [AWG]	_____
材 料 Material		
绝缘材料	Insulation Material	PA 66
阻燃等级	Imflammability	UL94V-0
导体材料	Contactor Material	铜合金 Copper alloy
导体镀层	Contactive Coating	镀金 Gold Plated
螺母/螺丝	Connector Nut/Screw	Brass With Nickel Plated铜镀镍
符合RoHS环保要求		

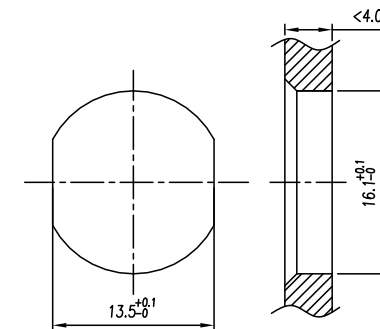

Panel cut-out

 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD							PART NO.: M12-SXX-ST0-F02-BQ1				
NO SPECIFIED TOLERANCE			Cus' P/N:		Order No :		---		Drawing No.:	SP-02-M000XX	
LINEAR	0.5~6	±0.1	DES.	JUN	DATE	UNITS	mm	THIRD ANGLE PROJECTION		PAGE	
	6~30	±0.2								1 of 1	
	>30	±2%	CHK.		DATE		SIZE				
ANGLES	±1°		APP.		DATE	SCALE	X:X		文件等级:外部公开		