


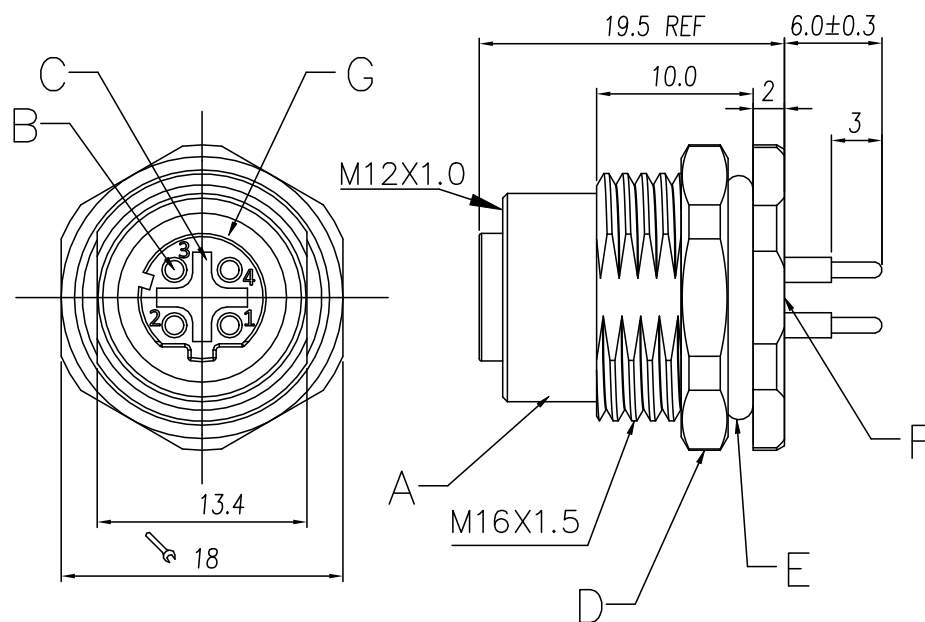


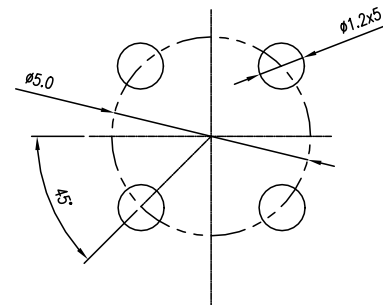

View from front
D-CODE 4PIN Female



PCB Layout

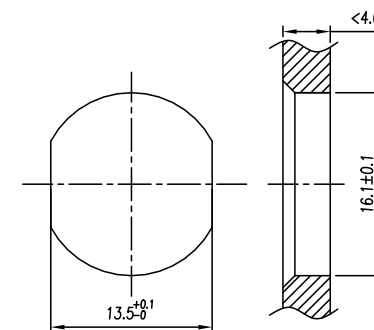

Panel cut-out

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

IEC 技术参数		IEC61076-2-101
IEC Technical Data		
工作温度 Operating temperatur [°C]	-25~+90	
防护等级 IP Class (IN Locked condition)	IP67	
额定电压 Rated Voltage [V]	250	
额定电流 Rated Current [A]	4	
导线截面积Conductor cross section 硬质/柔性导线 Solid/ flexible [mm²]		
连接方式 Contacts Termination	PCB	
焊接PCB Soldering PCB		
材 料 Material		
绝缘材料 Insulation Material	PA 66	
阻燃等级 Imflammability	UL94V-0	
导体材料 Contactor Material	铜合金 Copper alloy	
导体镀层 Contactive Coating	镀金 Gold Plated	
螺母/螺丝 Connector Nut/Screw	Brass With Nickel Plated铜镀镍	
符合RoHS环保要求		

G		O-Ring	O-Ring FKM Green	pcs	1
F		Resin	Black epoxy resin for sealing	g	2
E		O-Ring	O-Ring FKM Black	pcs	1
D		Nut	Nut: M16 X1.5,Brass With Nickel Plated	pcs	1
C		Housing	D-Coding Female 4PIN,BLACK PA66	pcs	1
B		Terminal	Female Terminal ,Brass With Gold Plated	pcs	4
A		Screw	Screw M12 X1.0,Brass With Nickel Plated	pcs	1
编号 No.	料号 Materials.No	品名 Name	材料规格 Description	单位 Unit	用量 Qty

						慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD				PART NO.: M12-D04-ST0-F01-BQ1 (PIN针6mm)	
NO SPECIFIED TOLERANCE			Cus' P/N:		Order No :		Drawing No.:		SP-02-M00XXX		
LINEAR	0.5~6	±0.1	DES.	JUN	DATE	UNITS	mm	THIRD ANGLE PROJECTION		PAGE	
	6~30	±0.2						CHK.	DATE	SIZE	A4
	>30	±2%	APP.	DATE	SCALE	X:X	文件等级:外部公开				