


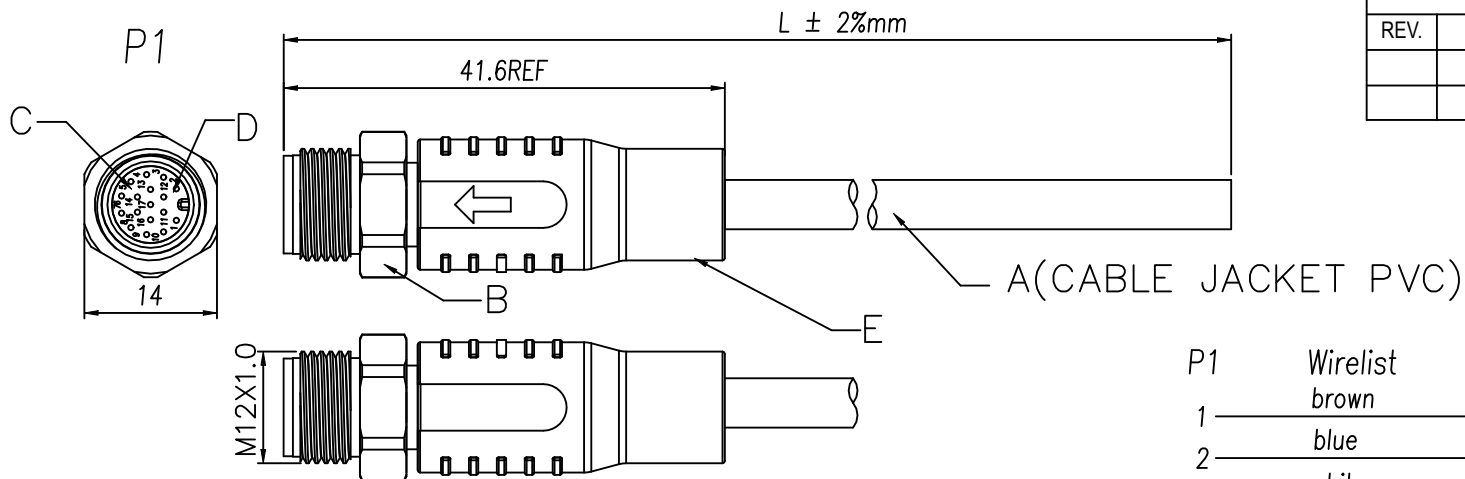

Contacts Pin 数	17Pin
A—Coding	
Rated Current 额定电流	1.5A
Rated Voltage 额定电压	30V
Wire Range线范围	26AWG
PART NO. 品名: (1M)	M12-A17-ST0-M02-SCC-100N
PART NO. 品名: (2M)	M12-A17-ST0-M02-SCC-200N
PART NO. 品名: (3M)	M12-A17-ST0-M02-SCC-300N
PART NO. 品名: (5M)	M12-A17-ST0-M02-SCC-500N
Custiomized. 定制化	

P1	Wirelist
1	brown
2	blue
3	white
4	green
5	pink
6	yellow
7	black
8	grey
9	red
10	violet
11	grey/pink
12	red/blue
13	white/green
14	brown/green
15	white/yellow
16	yellow/brown
17	white/grey

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE

IEC 技术参数		IEC61076-2-101
IEC Technical Data		
工作温度	Operating temperatur [°C]	-25~+80
防护等级	IP Class (IN Locked condition)	IP67
额定电压	Rated Voltage [V]	30
额定电流	Rated Current [A]	1.5
导线截面积	Conductor cross section	0.14
硬质/柔性导线	Solid/ flexible [mm²]	
接线范围	Wire Range	26
单/多芯线	Solid/Stranded [AWG]	
材料	Material	
绝缘材料	Insulation Material	PA 66
阻燃等级	Imflammability	UL94V-0
导体材料	Contactur Material	铜合金 Copper alloy
导体镀层	Contactive Coating	镀金 Gold Plated
螺母/螺丝	Connector Nut/Screw	Stainless steel 不锈钢
符合RoHS环保要求		

E		TPU	Molded With Black TPU	G	8
D		Housing	A-Coding Male 17PIN,Black PA66	pcs	1
C		Terminal	Male Terminal ,Brass With Gold Plated	pcs	17
B		Screw	Screw M12 X1.0,Stainless steel	pcs	1
A		Cable	UL TYPE 26AWG X17C Black PVC Jacket	mm	L
编号 No.	料号 Materials.No	品名 Name	材 料 规 格 Description	单位 Unit	用量 Qty

		慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD				PART NO.: M12-A17-ST0-M02-SCC-XXXN	
NO SPECIFIED TOLERANCE		Cus' P/N:	Order No: ---		Drawing No.:	SP-02-M00XXX	
LINEAR	0.5~6	±0.1	DES.	JUN	DATE	UNITS	mm
	6~30	±0.2	CHK.	DATE	SIZE	A4	
	>30	±2%	APP.	DATE	SCALE	X:X	
ANGLES	±1°		DATE		SCALE	X:X	文件等级: 外部公开