



REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		WangP	23.10.18

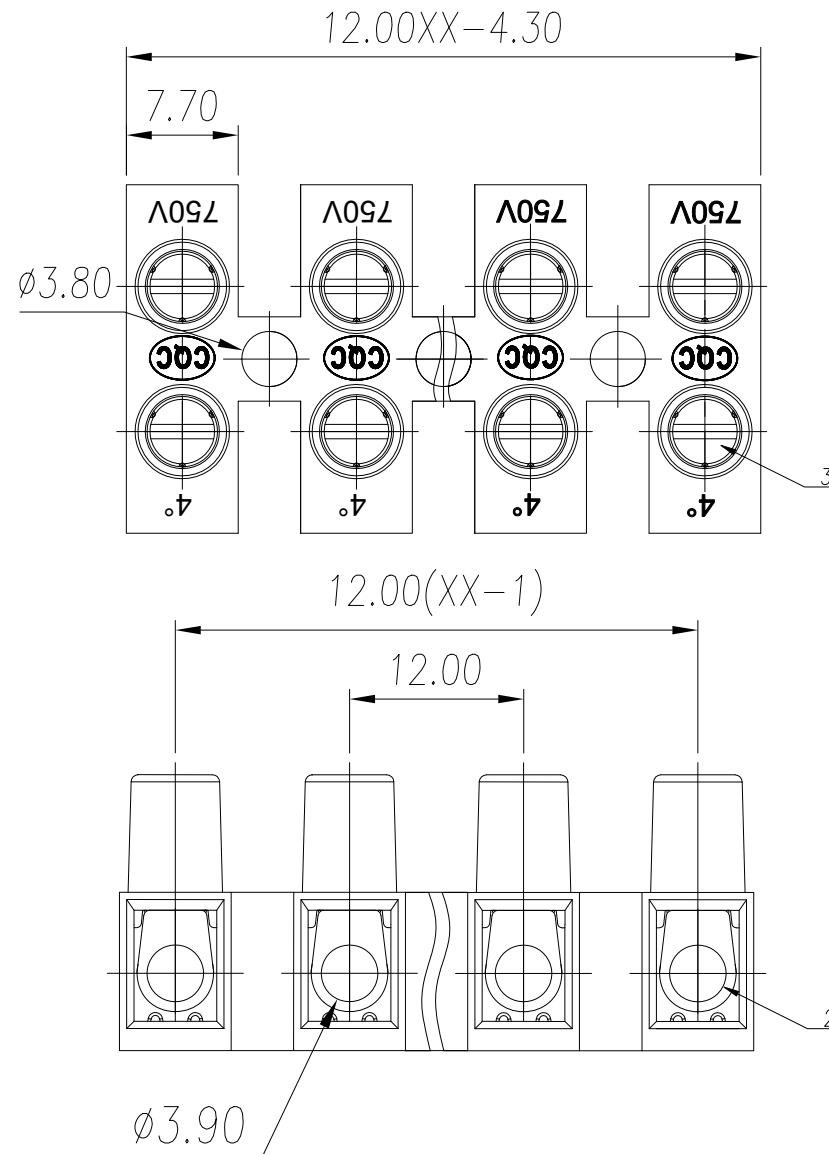

参考标准/ Standard	UL	IEC
额定电压/ Rated voltage	600V	750V
额定电流/ Rated current	50A	41A
接触电阻/ Contact resistance	20mΩ	
绝缘电阻/ Insulation resistance	500MΩ	DC500V
使用线径/ Wire range	20~8AWG	6.0mm ²
耐 电 压/ Withstanding voltage	AC 2200V	1 Min
机 械 性 能/ Mechanical		
扭矩/Torque	0.8Nm(7.2Lb.in)	
温度范围/ Temp.Range	-40°C~+105°C	
剥线长度/ Strip Length	7-8mm	
尺 寸/ Dimensions		
间 距/ Pitch	12.0mm	
极 数/ Poles	2~12p	

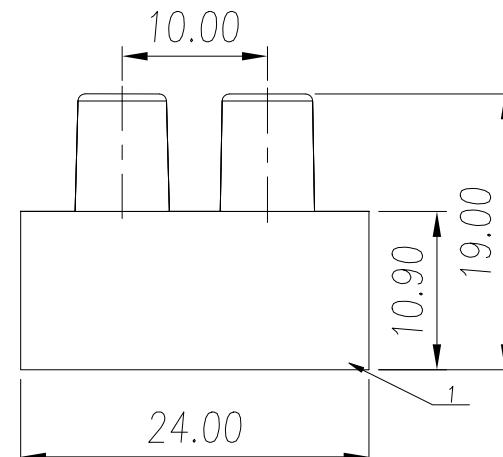

General Tolerances

variable range	— □ ⊥									
	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 0.60	
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

DES.	WangP	DATE	23.10.18	UNITS	mm	THIRD ANGLE PROJECTION	Sheet
3	Screw	CHK	YangHJ	DATE	23.10.18	SIZE	A4
2	Cage	Copper Alloy	M3.5/Ni Plated	APP.	JASON	SCALE	2:1
1	Housing	PA66	UL94V-2				
ITEM	NAME OF PART	MATERIAL	NOTES				
WANJIE	慈溪市万捷电子有限公司	CIXI WANJIE ELECTRONIC CO.,LTD	MY12H-1.2-12.0-XXP-1Y-00A				