
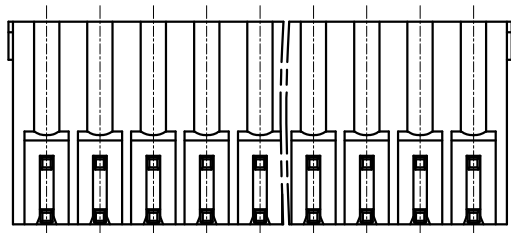
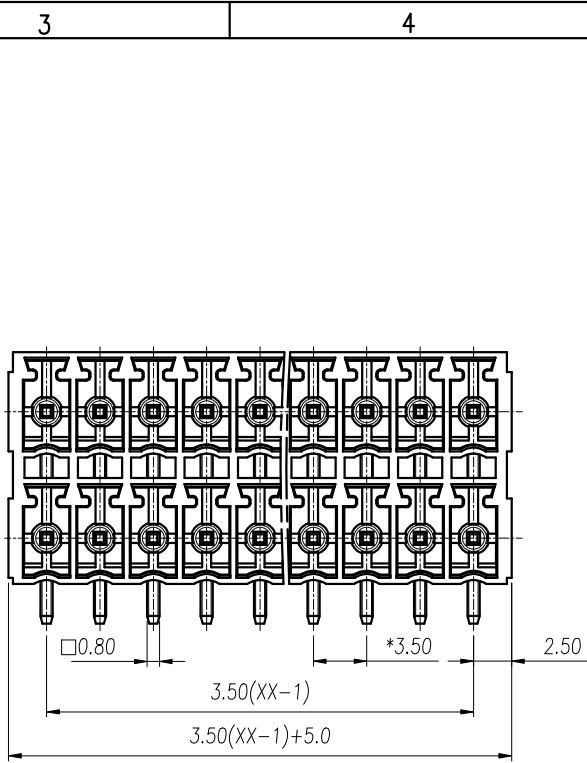
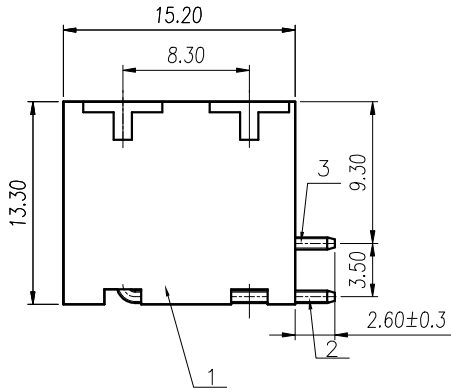


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权，否则禁止转让、复制、利用、交流本文件的内容。侵犯者将承担赔偿责任。本公司保留对涉及发明、实用新型和外观设计的所有权利。

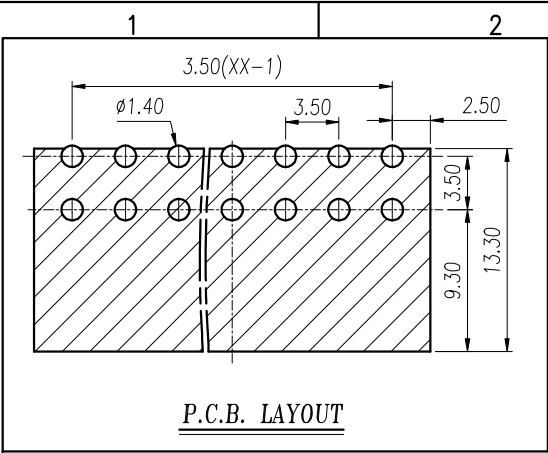

5

6

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
0	新发行		YaoFei	23.11.23

UL/CUL 技术参数

UL/CUL Technical Data

等级 Use Group

额定电压 Rated Voltage [V]

额定电流 Rated Current [A]

接线范围 Wire Range

单/多芯线 Solid/Stranded [AWG]

耐电压 Withstanding Voltage

IEC 技术参数

IEC Technical Data

过电压类别 Overvoltage Category

污染等级 Contamination Class

额定电压 Rated Voltage [V]

额定电流 Rated Current [A]

额定冲击电压 Impulse withstand voltage [KV]

导线截面积 Conductor cross section

硬质/柔性导线 Solid/flexible [mm²]

一般参数 Other Data

间距 Pitch /极数 Poles [mm] / [P]

工作温度 Operating temperature [°C]

焊接方式 Soldering method

引脚尺寸 Pin Dimensions [mm]

PCB板孔径 PCB Hole Diameter [mm]

符合RoHS环保要求

REVISION RECORD

ECN No.

APPROVED

DATE

YaoFei

23.11.23

UL/CUL

Technical Data

等级

Use Group

额定电压

Rated Voltage [V]

额定电流

Rated Current [A]

接线范围

Wire Range

单/多芯线

Solid/Stranded [AWG]

耐电压

Withstanding Voltage

1600V/1Min

IEC 技术参数

IEC Technical Data

过电压类别

Overvoltage Category

污染等级

Contamination Class

额定电压

Rated Voltage [V]

额定电流

Rated Current [A]

额定冲击电压

Impulse withstand voltage [KV]

导线截面积

Conductor cross section

硬质/柔性导线

Solid/flexible [mm²]

一般参数

Other Data

间距

Pitch /极数 Poles [mm] / [P]

工作温度

Operating temperature [°C]

焊接方式

Soldering method

Reflow Soldering

引脚尺寸

Pin Dimensions [mm]

0.8*0.8

PCB板孔径

PCB Hole Diameter [mm]

Ø1.4

符合RoHS环保要求

IEC61984

III

III

II

3

2

2

160

160

250

8

8

8

2.5

2.5

2.5

-

3.5 / 2*02~2*24

-40~+130

Reflow Soldering

0.8*0.8

Ø1.4

符合RoHS环保要求

General Tolerances

variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30

3	Short Pin	Copper Alloy	Sn Plated
2	Long Pin	Copper Alloy	Sn Plated
1	Housing	LCP	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DES.	YaoFei	DATE	23.11.23	UNITS	mm	THIRD ANGLE PROJECTION	YaoFei
CHK.	YangHJ	DATE	23.11.23	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
APP.	JASON	DATE	23.11.23	SCALE	2:1	DRAWING TYPE: SP-03	REV 0
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJ15EDGRHB-THT-3.5-2*XXP-1Y-00A	