
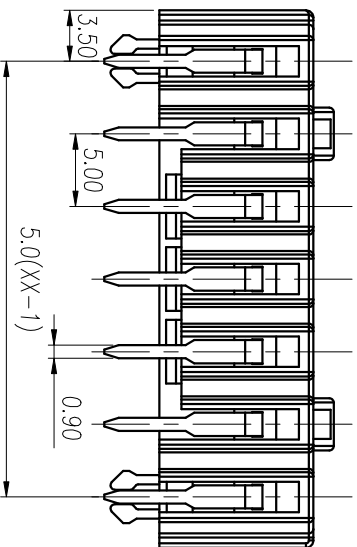
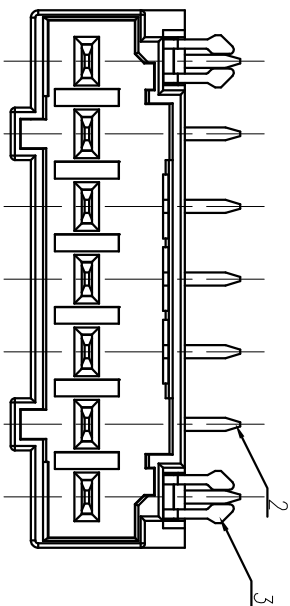
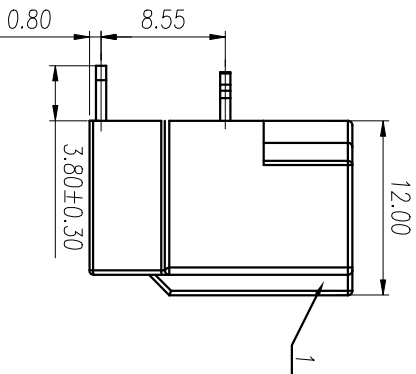
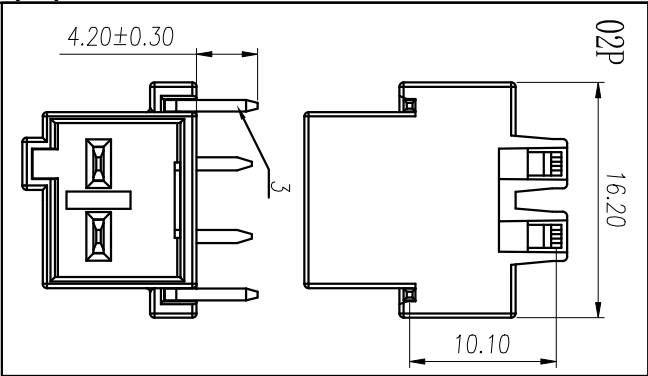


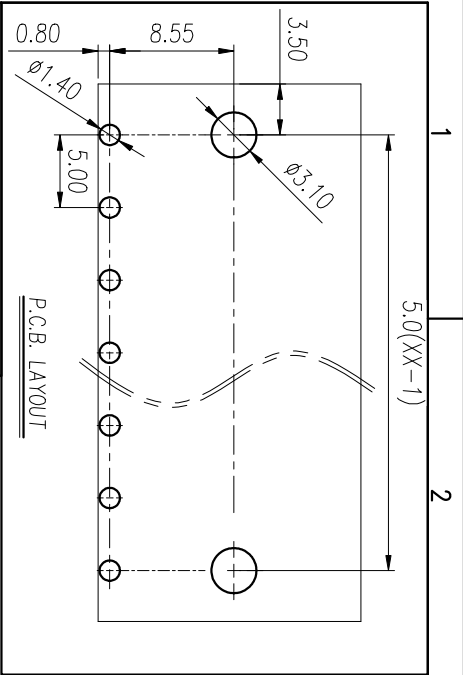

REVISION RECORD			
REV.	DESCRIPTION	ECN No.	APPROVED
V0	新发行	YUCZ	23.08.14

UL/CUL 技术参数			
等级	Use Group	B	C
额定电压	Rated Voltage [V]	300	300
额定电流	Rated Current [A]	16	10
接线范围	Wire Range	/	
单/多芯线	Solid/Stranded [AWG]	/	
耐电压	Withstanding Voltage	1600V/1Min	

IEC 技术参数			
IEC Technical Data			
过电压类别	Overvoltage Category	III	II
污染等级	Contamination Class	3	2
额定电压	Rated Voltage [V]	160	320
额定电流	Rated Current [A]	20	20
额定冲击电压	Impulse withstand voltage [kV]	4	4
导线截面积	Conductor cross section	/	
硬质/柔性导线	Solid/flexible	/	

过电压类别		Overvoltage Category	
污染等级	Contamination Class	3	2
额定电压	Rated Voltage	160	160
额定电流	Rated Current	20	20
额定冲击电压			320
Impulse withstand voltage	[kV]	4	4
导体截面积	Conductor cross section		
硬铜柔焊导线	Solid flexible	/	
		[mm²]	

符合RoHS环保要求			
3	Mount(02P, 04P)	Copper Alloy	Sn Plated
2	Pin header	Copper Alloy	Sn Plated
1	Housing	PA66	UL94V-0
符合RoHS环保要求			

General Tolerances									
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 0.60
Tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30

DES.	YUCZ	DATE	23.08.14	UNITS	mm	THIRD ANGLE PROJECTION	第三角投影
CHK.	YangHJ	DATE	23.08.14	SIZE	A4	TYPE: CUSTOMER DRAWING	客户图纸
APP.	JASON	DATE	23.08.14	SCALE	2:1	DRAWING TYPE: SP-03	REV V0
WANJI				嘉溪市万捷电子有限公司 CXM WANJIE ELECTRONIC CO., LTD			
PART NO.:				WJ9RC-5.0-XXP-1Y-00A			