


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 慈溪市万捷电子有限公司 复制、利用、交流本文件的内容，侵犯者将负法律责任。本公司保留对涉及发明、实用新型和外观设计的所有权利。

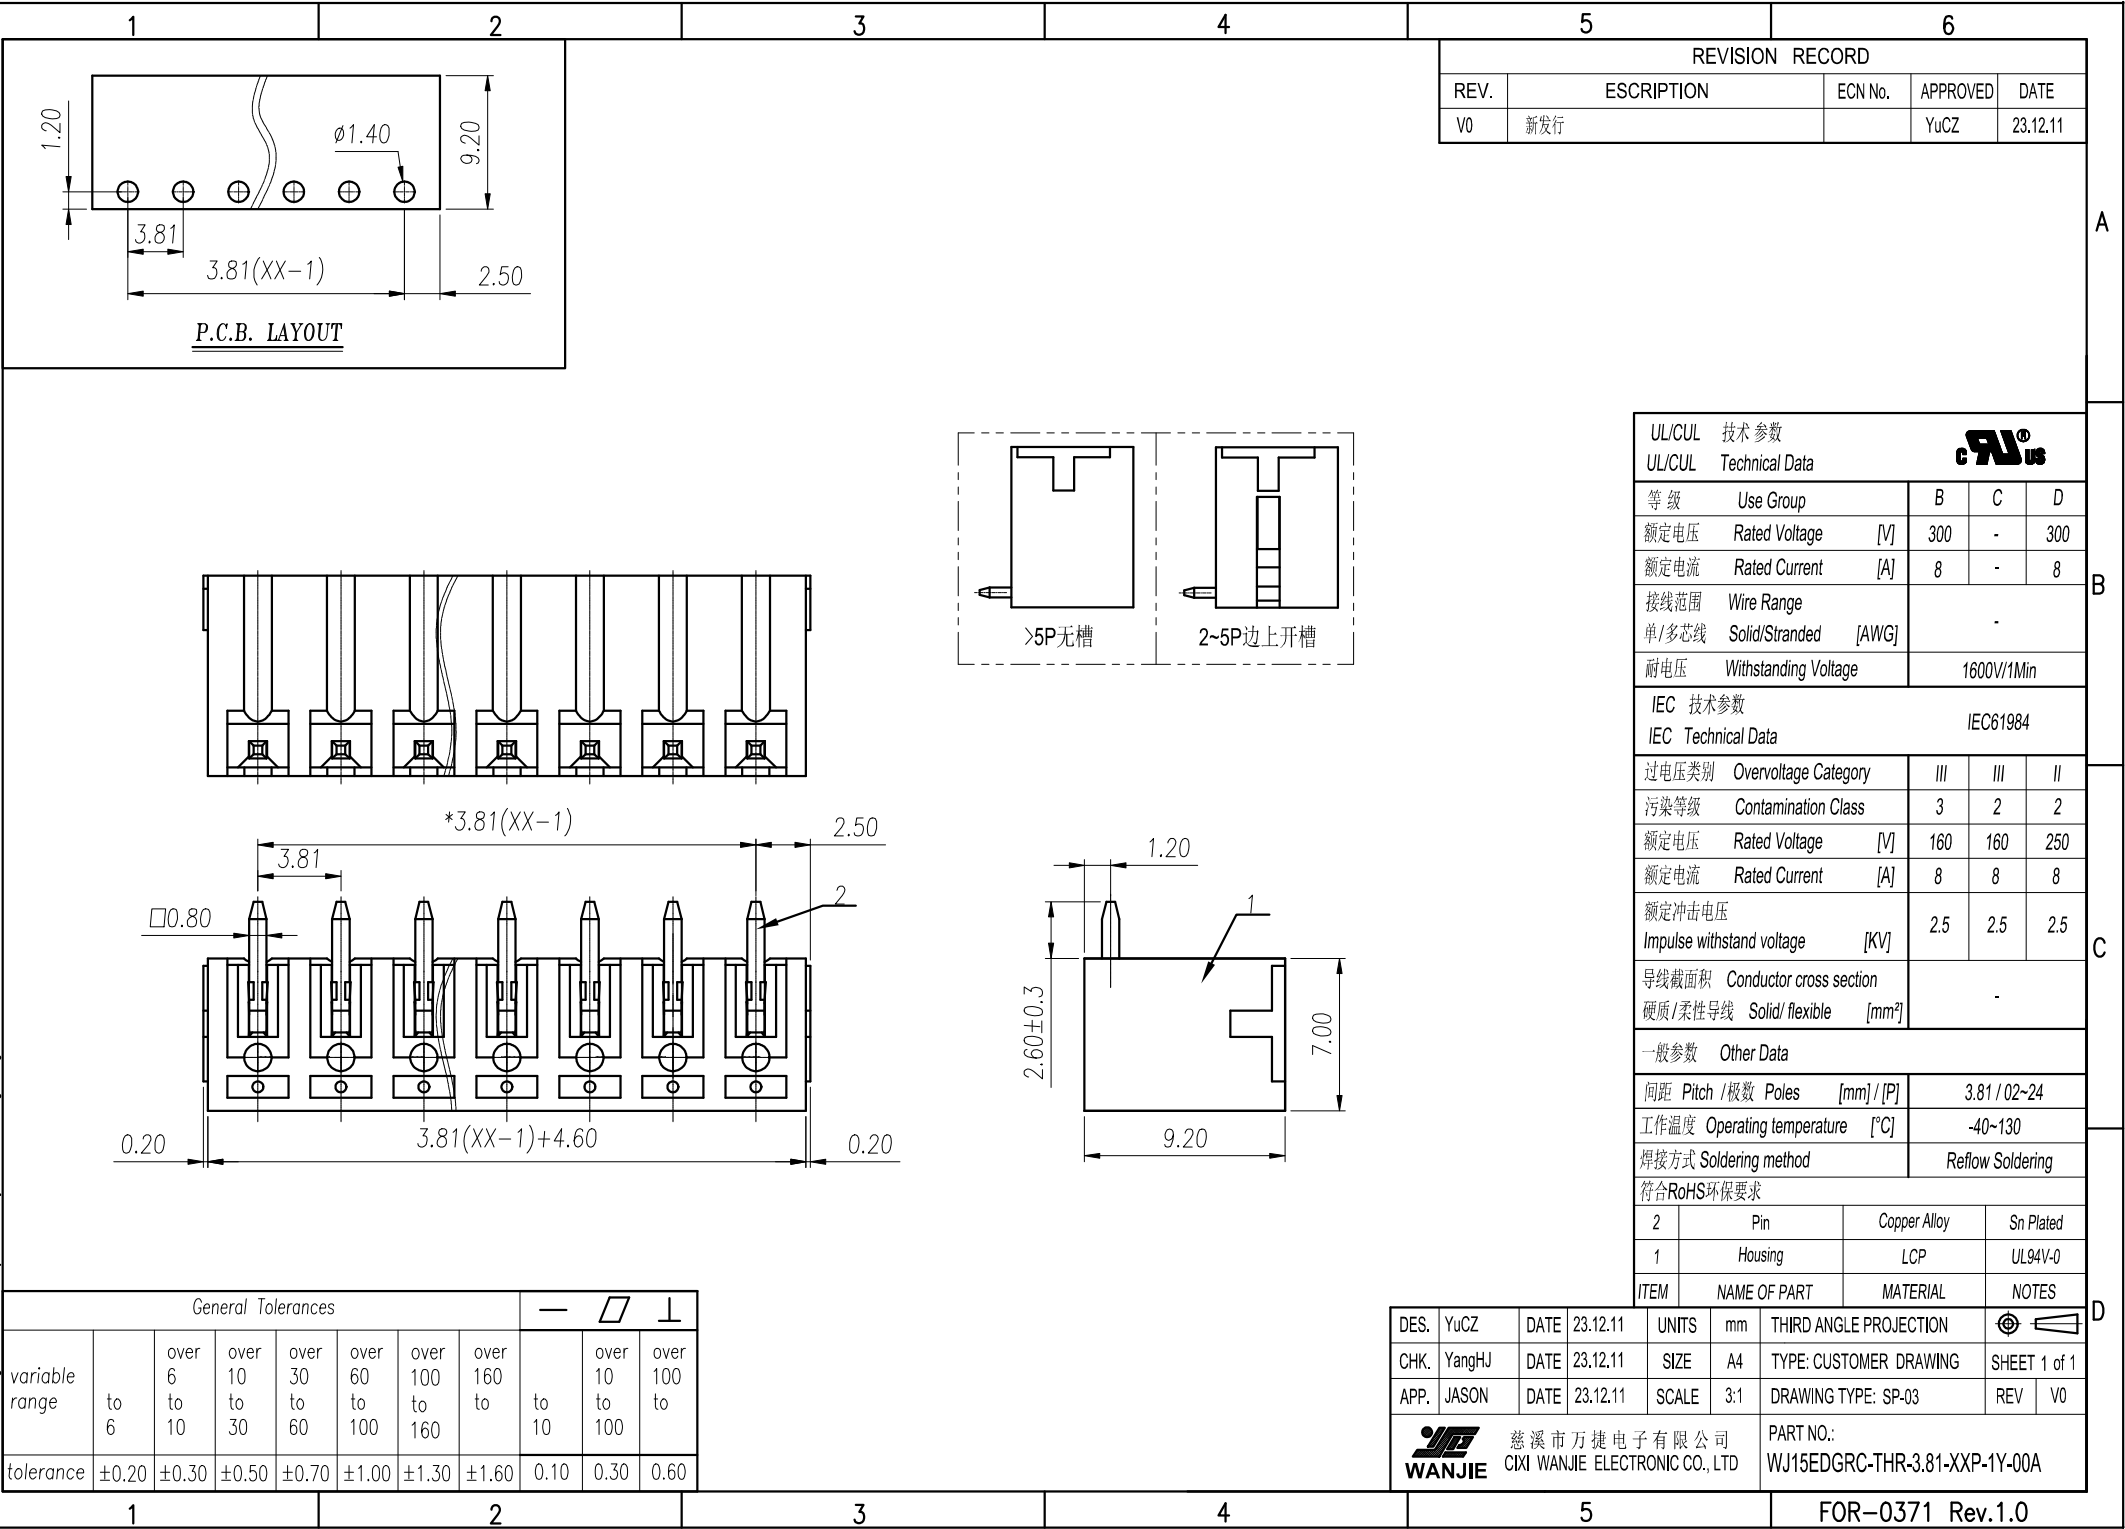

UL/CUL 技术参数		UL/CUL Technical Data					
等级	Use Group	B	C	D			
额定电压	Rated Voltage [V]	300	-	300			
额定电流	Rated Current [A]	8	-	8			
接线范围	Wire Range						
单/多芯线	Solid/Stranded [AWG]						
耐电压	Withstanding Voltage	1600V/1Min					
IEC 技术参数		IEC61984					
IEC Technical Data							
过电压类别	Overvoltage Category	III	III	II			
污染等级	Contamination Class	3	2	2			
额定电压	Rated Voltage [V]	160	160	250			
额定电流	Rated Current [A]	8	8	8			
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5			
导线截面积	Conductor cross section						
硬质/柔性导线	Solid/flexible [mm²]						
一般参数		Other Data					
间距	Pitch / 极数 Poles [mm] / [P]	3.81 / 02~24					
工作温度	Operating temperature [°C]	-40~130					
焊接方式	Soldering method	Reflow Soldering					
符合RoHS环保要求							
2	Pin	Copper Alloy		Sn Plated			
1	Housing	LCP		UL94V-0			
ITEM	NAME OF PART	MATERIAL		NOTES			
UNITS	mm	THIRD ANGLE PROJECTION					
SIZE	A4	TYPE: CUSTOMER DRAWING			SHEET 1 of 1		
SCALE	3:1	DRAWING TYPE: SP-03			REV V0		
子有限公司 TRONIC CO., LTD		PART NO.: WJ15EDGRC-THR-3.81-XXP-1Y-00A					