
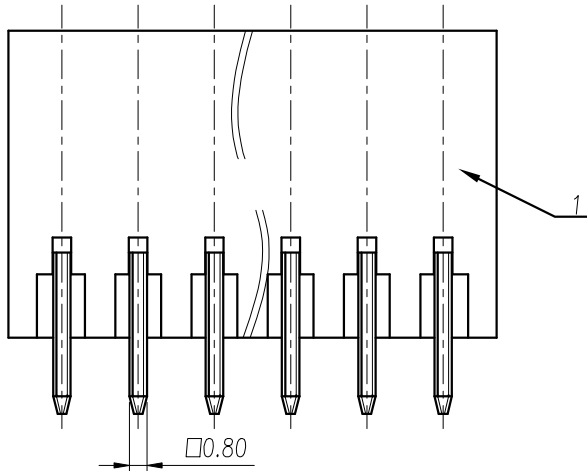
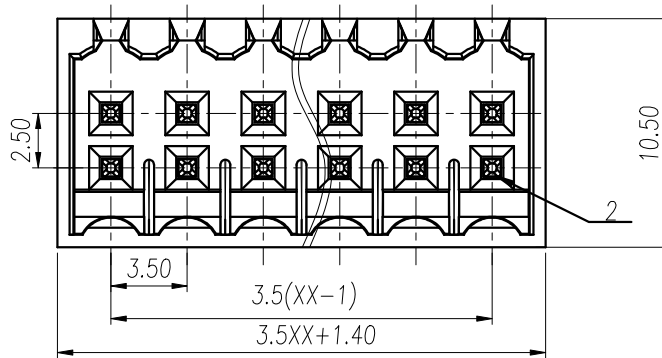
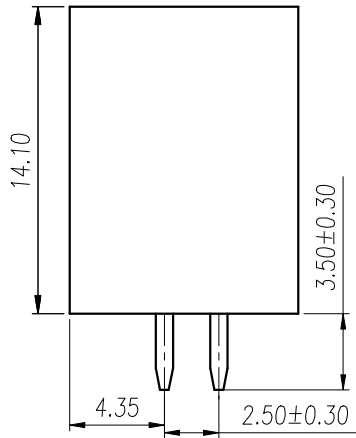


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除特别声明外，本文件的所有内容，未经本公司书面许可，不得复制或传播。本公司保留对涉及发明、实用新型和外观设计的所有权利。

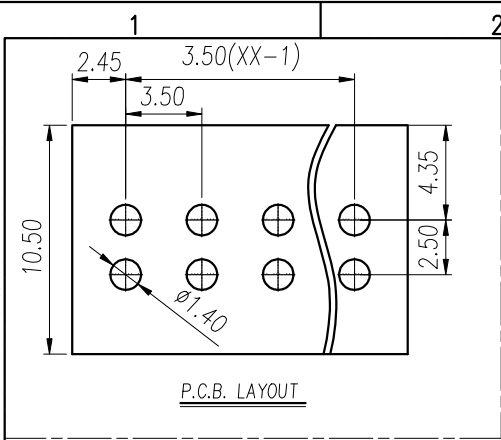

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		YuCZ	23.10.18

UL/CUL 技术参数		UL/CUL Technical Data		
等 级	Use Group	B	C	D
额定电压	Rated Voltage [V]	150	—	—
额定电流	Rated Current [A]	7	—	—
接线范围	Wire Range	/		
单/多芯线	Solid/Stranded [AWG]			
耐电压	Withstanding Voltage	1300V/1Min		
IEC 技术参数		IEC 61984		
IEC Technical Data				
过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	80	125	250
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积	Conductor cross section	/		
硬质/柔性导线	Solid/ flexible [mm²]			
材 料		Material		
绝缘材料	Insulation Material	LCP		
阻燃等级	Imflammability	UL94V-0		
导体材料	Contact Material	铜合金 Copper alloy		
导体镀层	Contactive Coating	镀锡 Sn Plated		
一般参数		Other Data		
间距	Pitch [mm]	3.5		
极数	Poles [P]	2*02~2*24		
工作温度	Operating temperature [°C]	-40~130		
焊接方式	Soldering method	Reflow Soldering		

General Tolerances								—	□	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 100	
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

2	Pin 1	Copper Alloy	Sn Plated
1	Housing	LCP	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DES.	YuCZ	DATE	23.10.18	UNITS	mm	THIRD ANGLE PROJECTION	☉
CHK.	YangHJ	DATE	23.10.18	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
APP.	JASON	DATE	23.10.18	SCALE	3:1	DRAWING TYPE: SP-03	REV V0
 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJ15EDGVHSC-THR-3.5-2*XXP-1Y-00A	

FOR-0371 Rev.1.0