
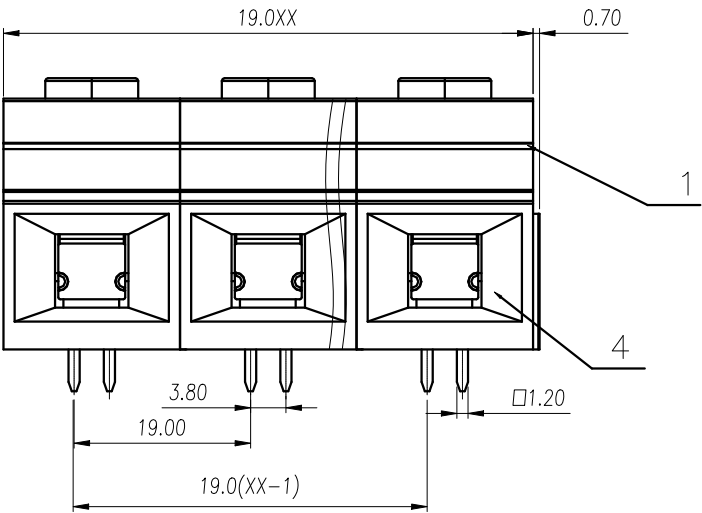
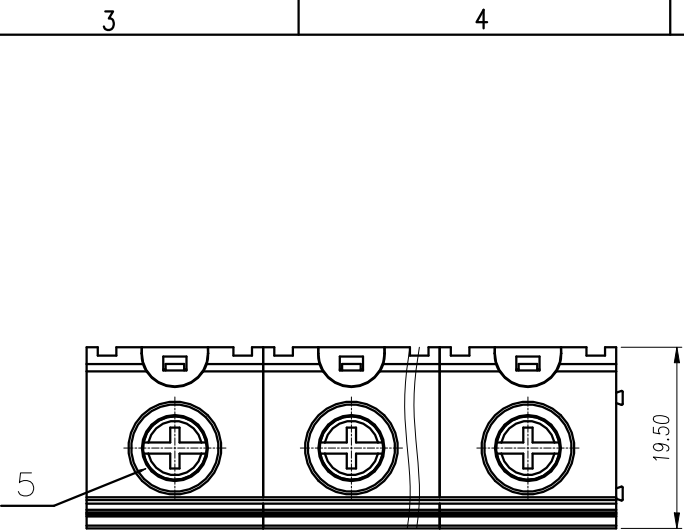
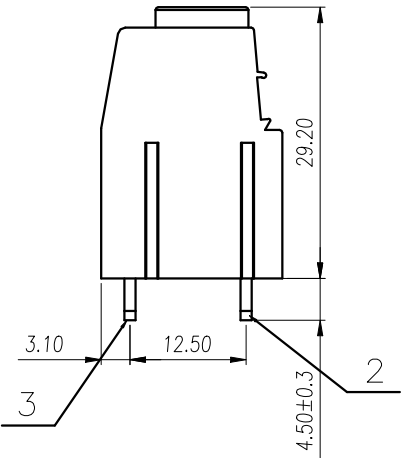


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除经给予明确授权, 否则禁止转让、复制、利用、交流本文件的内容。侵犯者须承担赔偿责任。 本公司保留对涉及发明、实用新型和外观设计的所有权利。

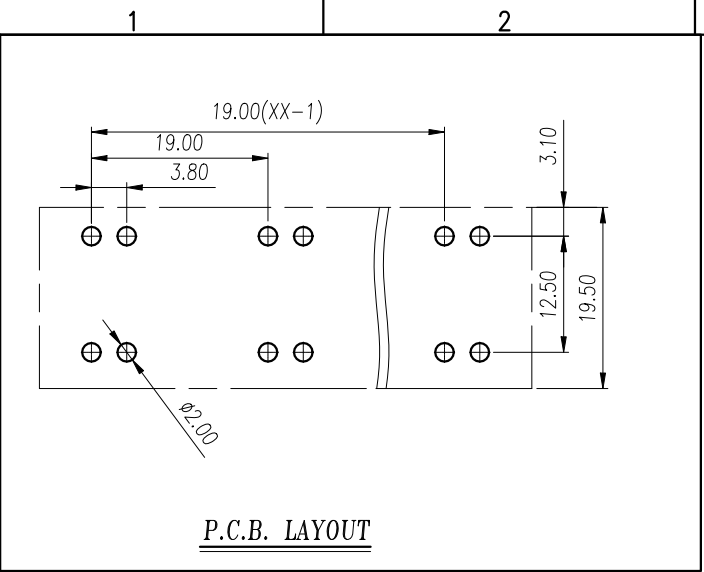

General Tolerances								— □ ⊥		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

5	Screw	Steel	M5/Zn Plated
4	Cage	Steel	M5/Zn Plated
3	Header Pin	Copper Alloy	Sn Plated
2	Header Pin	Copper Alloy	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DES.	WangP	DATE	26.01.27	UNITS	mm	THIRD ANGLE PROJECTION			
CHK.	YangHJ	DATE	26.01.27	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1		
APP.	JASON	DATE	26.01.27	SCALE	1:1	DRAWING TYPE: SP-03	REV	V0	
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJ119-19.0-XXP-1Y-00A			

REVISION RECORD						
REV.	DESCRIPTION		ECN No.	APPROVED	DATE	
V0	新发行			WangP	26.01.27	
1	UL/CUL 技术 参数					
	UL/CUL Technical Data					
	等 级	Use Group		B	C	D
	额定电压	Rated Voltage	[V]	600	600	600
	额定电流	Rated Current	[A]	100	100	5
	接线范围	Wire Range		18-3		
	单/多芯线	Solid/Stranded	[AWG]			
	耐电压	Withstanding Voltage		2200V/1Min		
	IEC 技术参数			IEC60947-7-4		
	IEC Technical Data					
	过电压类别	Overvoltage Category		III	III	II
	污染等级	Contamination Class		3	2	2
	额定电压	Rated Voltage	[V]	1000	1000	1000
	额定电流	Rated Current	[A]	100	100	100
	额定冲击电压	Impulse withstand voltage	[KV]	8.0	8.0	8.0
	导线截面积	Conductor cross section		0.5-25		
	硬质/柔性导线	Solid/ flexible	[mm²]			
	材 料 Material					
	绝缘材料	Insulation Material		PA 66		
	阻燃等级	Imflammability		UL94V-0		
	导体材料	Contactur Material		铜合金 Copper alloy		
	导体镀层	Contactive Coating		镀锡 Sn Plated		
	一般参数 Other Data					
	间距	Pitch	[mm]	19.0		
	极数	Poles	[P]	01~12		
剥线长度	Stripping Length	[mm]	10~12			
螺丝	Screw		M5			
扭矩	Torque(Max)	[N.m]	2.0			
工作温度	Operating temperature	[°C]	-40~105			