
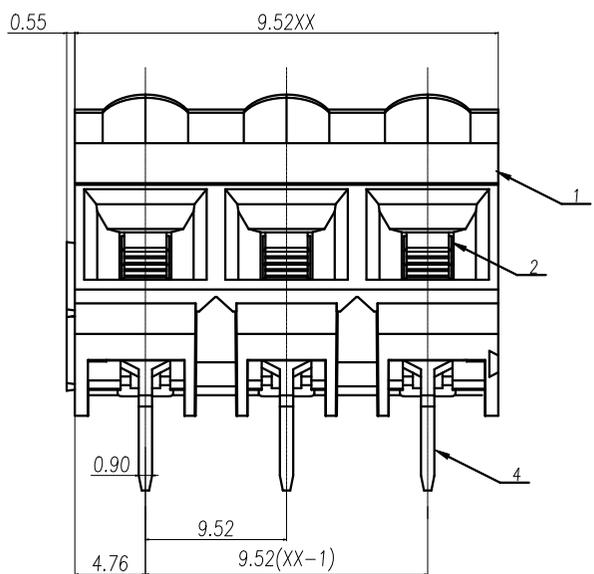
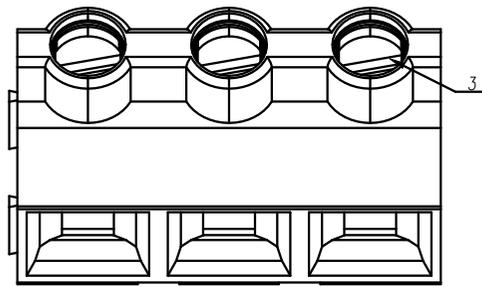
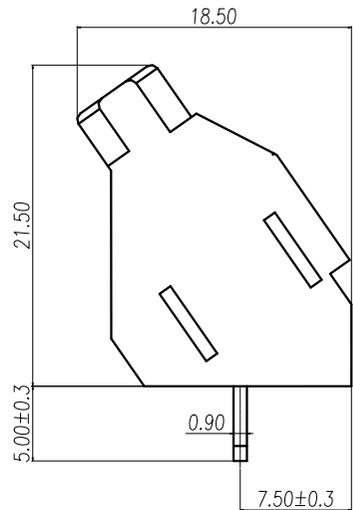


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权, 否则禁止转让、复制、利用、交还本文件的内容。侵犯者须承担赔偿责任。本公司保留的涉及及使用、实用新型和外观设计的所有权利。

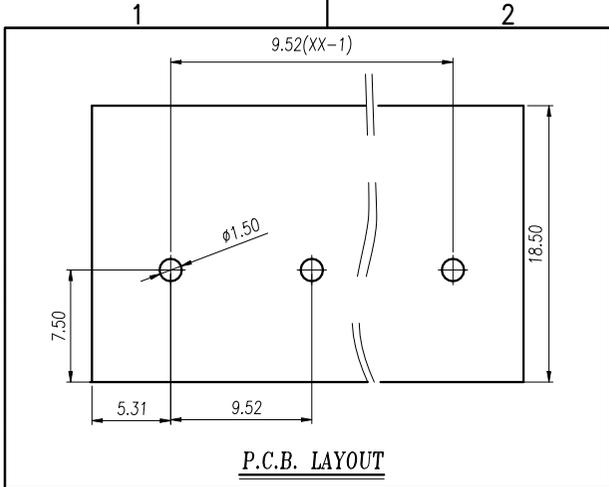

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		WangP	24.10.09

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	300	600
额定电流	Rated Current [A]	30	30	5
接线范围	Wire Range			
单/多芯线	Solid/Stranded [AWG]	30-10		
耐电压	Withstanding Voltage	1600V/1Min		

IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	690	1000	1000
额定电流	Rated Current [A]	32	32	32
额定冲击电压	Impulse withstand voltage [KV]	6.0	6.0	6.0
导线截面积	Conductor cross section	0.2-6.0/0.2-4.0		
硬质/柔性导线	Solid/flexible [mm ²]			

一般参数		Other Data		
间距	Pitch / 极数 Poles [mm] / [P]	9.52 / 02~14		
剥线长度	Stripping Length [mm]	8		
螺丝	Screw/扭矩 Torque(Max) [N.m]	M3.5/0.8		
工作温度	Operating temperature [°C]	-40~105		
焊接方法	Soldering method	Wave soldering		
引针尺寸	Pin Dimensions [mm]	0.9*0.9		
PCB板孔径	PCB Hole Diameter [mm]	Ø1.5		

General Tolerances								— □ ⊥		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 100	to 10	to 100	to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

4	Header pin	Copper Alloy	Sn Plated
3	Screw	Steel	M3.5/Zn Plated
2	Cage	Copper Alloy	M3.5/Ni Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DES.	WangP	DATE	24.10.09	UNITS	mm	THIRD ANGLE PROJECTION		
CHK.	YangHJ	DATE	24.10.09	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1	
APP.	JASON	DATE	24.10.09	SCALE	2:1	DRAWING TYPE: SP-03	REV	V0
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJ952S-9.52-XXP-1Y-00A		