




慈溪市万捷电子有限公司

CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

UL/CUL 技术参数 (UL1059)		cRU [®] us		
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	300	600
额定电流	Rated Current [A]	20	20	5
耐压	Withstanding Voltage	1600V/1Min		
接线范围	Wire Range	26-12		
单/多芯线	Solid/Stranded [AWG]			
IEC 技术参数 (IEC60947-7-1)		IEC Technical Data		
过电压类别	Overtoltage Category	III		
污染等级	Contamination Class	3		
额定电压	Rated Voltage [V]	500		
额定电流	Rated Current [A]	22		
额定冲击电压	Impulse withstand voltagea [KV]	6		
导体截面积		Conductor cross section		
单芯	Solid [mm ²]	0.2-4		
柔性导线	flexible [mm ²]	0.2-2.5		
柔性导线带冷压头	flexible with ferrule [mm ²]	0.2-2.5		
材料		Material		
绝缘材料	Insulation Material	PA66		
阻燃等级	Imflamability	UL94V-0		
导体材料	Contactr Material	铜合金 Copper alloy		
导体表面镀层	Contactive Coating	镀锡 Sn Plated		
一般参数		Other Data		
连接点数	connection points	4		
剥线长度	Stripping Length [mm]	8-10		
导轨类型	Type of rail	DIN 35		
螺丝	Screw/扭矩 Torque(Max) [N.m]	-		
工作温度	Operating temperatur [°C]	-40-105		

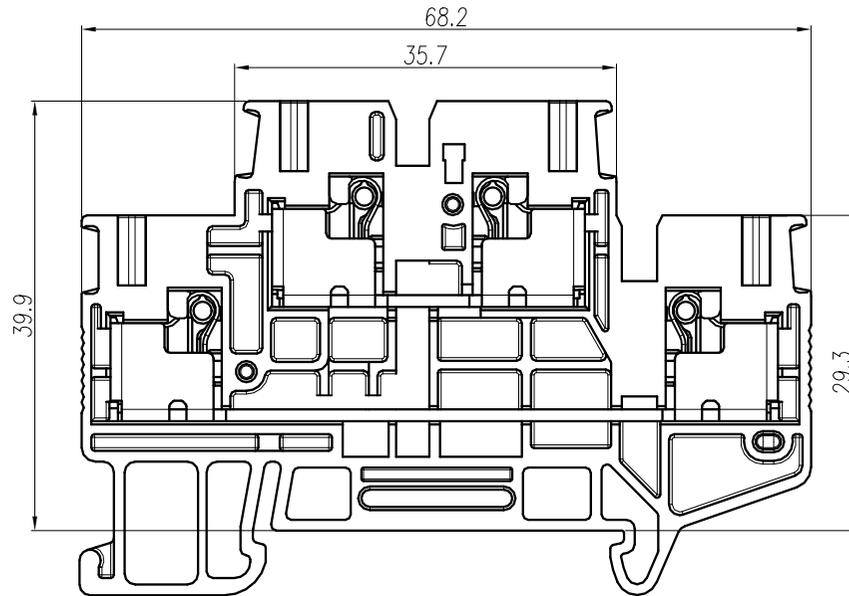

linear dimension(Tolerances Standard GB/T 14486-2008)										— ▯ ⊥		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	to 10	over 10 to 100	over 100 to	tolerance	红色/Red	GUV2.5-202-RD-00A
											黄色/Yellow	GUV2.5-202-YE-00A
											绿色/Green	GUV2.5-202-GN-00A
											橙色/Oeange	GUV2.5-202-OG-00A
											蓝色/Blue	GUV2.5-202-BU-00A
										灰色/Gray	GUV2.5-202-GY-00A	
										颜色/Colour	订货号/Order No.	

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角/THIRD ANGLE PROJECTION	版本 / REV	V0
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD							名称 / TITLE GUV2.5-202-XX-00A	