



慈溪市万捷电子有限公司


CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE



5.2

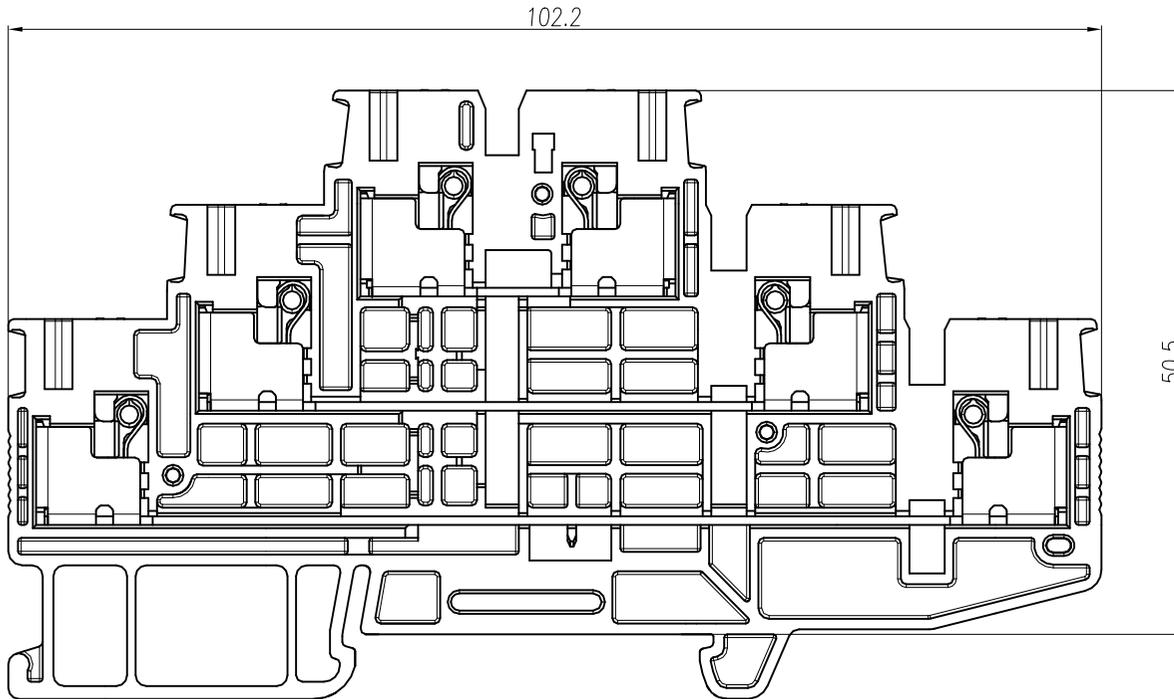

UL/CUL 技术参数 (UL1059)		UL/CUL Technical Data			
等级	Use Group	B	C	D	
额定电压	Rated Voltage [V]	300	300	600	
额定电流	Rated Current [A]	20	20	5	
耐电压	Withstanding Voltage	1600V/1Min			
接线范围	Wire Range	26-12			
单/多芯线	Solid/Stranded [AWG]				
IEC 技术参数 (IEC60947-7-1)		IEC Technical Data			
过电压类别	Overtoltage Category	III			
污染等级	Contamination Class	3			
额定电压	Rated Voltage [V]	500			
额定电流	Rated Current [A]	20			
额定冲击电压	Impulse withstand voltagea [KV]	6			
导体截面积		Conductor cross section			
单芯	Solid [mm ²]	0.2-4			
柔性导线	flexible [mm ²]	0.2-2.5			
柔性导线带冷压头	flexible with ferrule [mm ²]	0.2-2.5			
材料		Material			
绝缘材料	Insulation Material	PA66			
阻燃等级	Imflamability	UL94V-0			
导体材料	Contactive Material	铜合金 Copper alloy			
导体表面镀层	Contactive Coating	镀锡 Sn Plated			
一般参数		Other Data			
连接点数	connection points	6			
剥线长度	Stripping Length [mm]	8-10			
导轨类型	Type of rail	DIN 35			
螺丝	Screw/扭矩 Torque(Max) [N.m]	-			
工作温度	Operating temperatur [°C]	-40-105			

linear dimension(Tolerances Standard GB/T 14486-2008)										红色/Red	GUV2.5-302-RD-00A		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	to 0.10	over 10 to 100	over 100 to 100	黄色/Yellow	GUV2.5-302-YE-00A		
											绿色/Green	GUV2.5-302-GN-00A	
												橙色/Orange	GUV2.5-302-OG-00A
												蓝色/Blue	GUV2.5-302-BU-00A
												灰色/Gray	GUV2.5-302-GY-00A
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60	颜色/Colour	订货号/Order No.	

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	2:1	第三视角 / THIRD ANGLE PROJECTION	版本 / REV	V0-1
						名称 / TITLE	GUV2.5-302-XX-00A	
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD								