





# 慈溪市万捷电子有限公司

## CIXI WANJIE ELECTRONIC CO., LTD

### REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

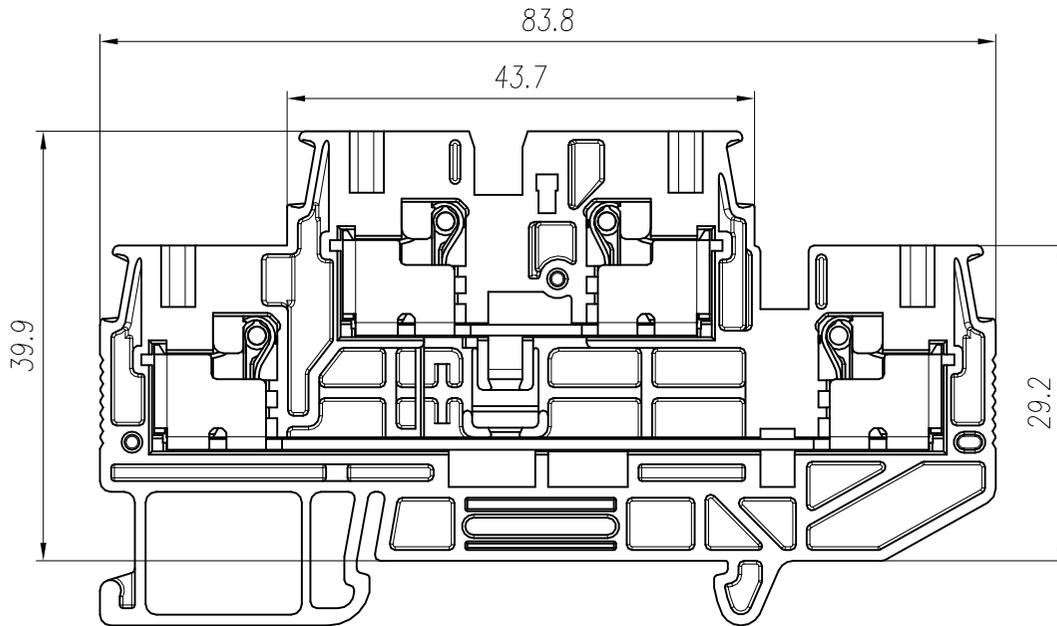

UL/CUL 技术参数 (UL1059)				
UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	300	600
额定电流	Rated Current [A]	28	28	5
耐电压	Withstanding Voltage	1600V/1Min		
接线范围	Wire Range	24-10		
单/多芯线	Solid/Stranded [AWG]			
IEC 技术参数 (IEC60947-7-1/2)		IEC 60947-1		
IEC Technical Data				
过电压类别	Overvoltage Category	III		
污染等级	Contamination Class	3		
额定电压	Rated Voltage [V]	500		
额定电流	Rated Current [A]	28		
额定冲击电压	Impulse withstand voltagea [KV]	6		
导线截面积 Conductor cross section				
单芯	Solid [mm <sup>2</sup> ]	0.2-4		
柔性导线	flexible [mm <sup>2</sup> ]	0.2-4		
柔性导线带冷压头	flexible with ferrule [mm <sup>2</sup> ]	0.2-4		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Imflamability	UL94 V-0		
导体材料	Contactior Material	铜合金 Copper alloy		
导体表面镀层	Contactive Coating	镀锡 Sn Plated		
一般参数 Other Data				
连接点数	connection points	4		
剥线长度	Stripping Length [mm]	10-12		
导轨类型	Type of rail	DIN 35/DIN 32		
螺丝 Screw/扭矩 Torque(Max) [N·m]		-		
工作温度	Operating temperatur [°C]	-40~105		

linear dimension (Tolerances Standard GB/T 14486-2008)										— ▯ ⊥			
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	to 0.10	over 10 to 100	over 100 to 100	0.30	红色/Red	GUV4-202-RD-00A	
											黄色/Yellow	GUV4-202-YE-00A	
												绿色/Green	GUV4-202-GN-00A
												橙色/Orange	GUV4-202-OG-00A
												蓝色/Blue	GUV4-202-BU-00A
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60	灰色/Gray	GUV4-202-GY-00A	
												颜色/Colour	订货号/Order No.

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	3:2	第三视角 / THIRD ANGLE PROJECTION	版本 / REV	V0
						名称 / TITLE	GUV4-202-XX-00A	
						慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD		