
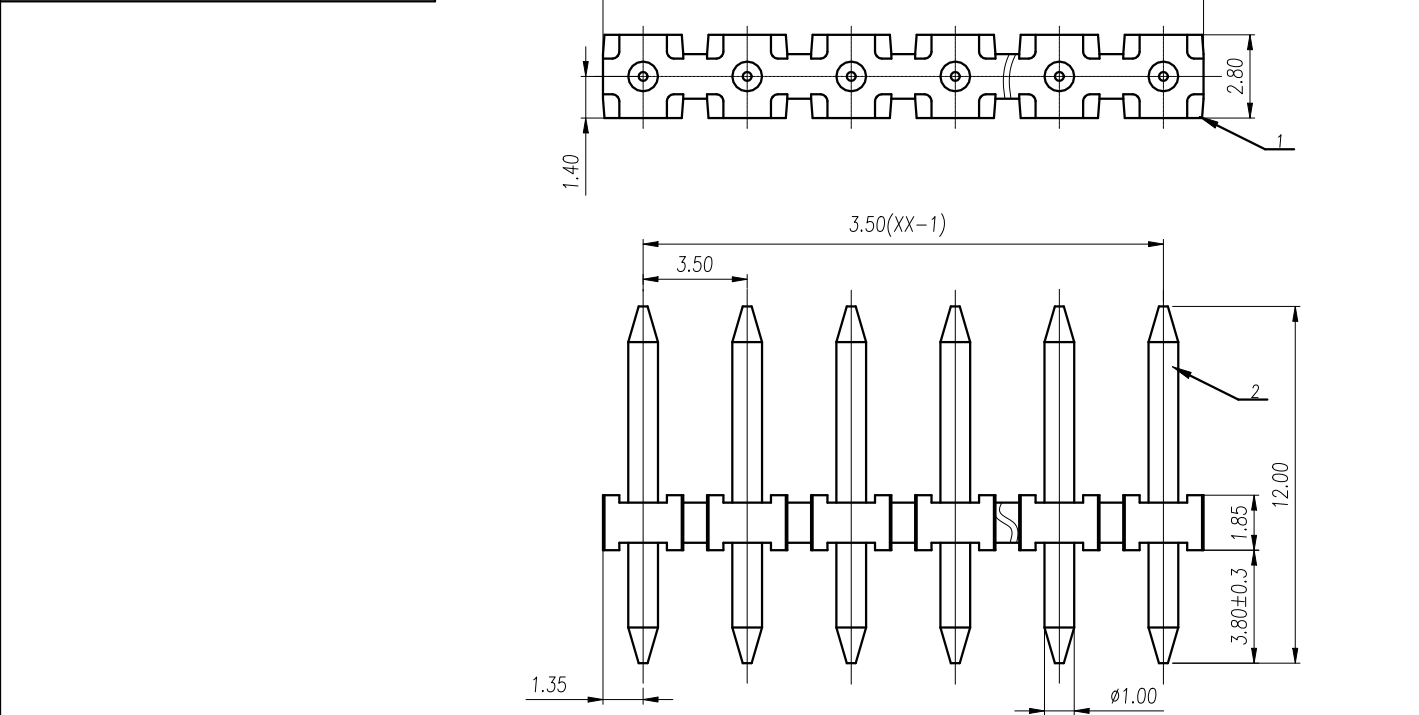


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权, 否则禁止转让、复制、利用、交流本文件的内容。侵犯者将承担赔偿责任。 本公司保留对涉及发明、实用新型和外观设计的所有权利。

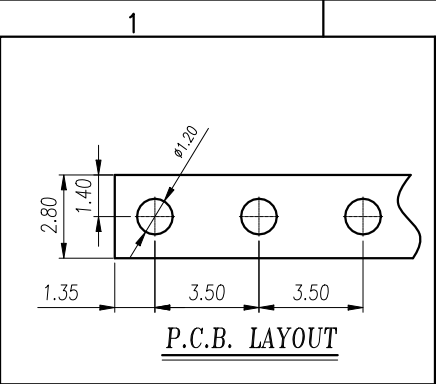

General Tolerances								— □ ⊥		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

2	Pin	Copper Alloy	Sn Plated
1	Housing	LCP	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

5					6									
REVISION RECORD														
REV.	ESCRPTION				ECN No.		APPROVED	DATE						
V0	新发行						WangP	24.09.13						
					UL/CUL 技术参数 UL/CUL Technical Data									
					等 级 Use Group		B	C	D					
					额定电压 Rated Voltage [V]		300	-	300					
					额定电流 Rated Current [A]		10	-	10					
					接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]		-							
					耐电压 Withstanding Voltage		1600V/1Min							
					IEC 技术参数 IEC Technical Data					IEC60947-7-4				
					过电压类别 Overvoltage Category		III	III	II					
					污染等级 Contamination Class		3	2	2					
					额定电压 Rated Voltage [V]		160	250	250					
					额定电流 Rated Current [A]		8	8	8					
					额定冲击电压 Impulse withstand voltage [KV]		2.5	2.5	2.5					
					导线截面积 Conductor cross section 硬质/柔性导线 Solid/ flexible [mm²]		-							
					一般参数 Other Data									
					间距 Pitch /极数 Poles [mm] / [P]		3.5 / 02~24							
					剥线长度 Stripping Length [mm]		-							
					螺丝 Screw/扭矩 Torque(Max) [N.m]		-							
					工作温度 Operating temperature [°C]		-40~130							
					焊接方法 Soldering method		Reflow Soldering							
					DES.	WangP	DATE	24.09.13	UNITS	mm	THIRD ANGLE PROJECTION			
					CHK.	YangHJ	DATE	24.09.13	SIZE	A4	TYPE: CUSTOMER DRAWING		SHEET 1 of 1	
					APP.	JASON	DATE	24.09.13	SCALE	4:1	DRAWING TYPE: SP-03		REV	V0
 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJ333J-THR-3.5-XXP-13-00A								